

LU-2200N Series

High-speed, Unison-feed, Lockstitch Machine
with Vertical-axis Large Hook and Automatic Thread Trimmer

high speed

powerful



high performance

LU-2200N Series

**Capabilities for sewing car seats have been
significantly improved.**

Efficiency of feed and sewing capabilities for supporting sewing performance at a higher speed of 3,500sti/min



LU-2210N-7

High-speed, 1-needle,
Unison-feed, Lockstitch Machine
with Vertical-axis Large Hook and
Automatic Thread Trimmer

LU-2210N-7 1.6 fold-capacity hook
LU-2210W-7 Double-capacity hook

The machine demonstrates outstanding performance when sewing heavy materials, with its "high-quality consistent sewing capabilities", as well as with its remarkably powerful feed.



LU-2260N-7

High-speed, 2-needle,
Unison-feed, Lockstitch Machine
with Vertical-axis Large Hook and
Automatic Thread Trimmer


LU-2260N-7 1.6 fold-capacity hook
LU-2260W-7 Double-capacity hook

The machine is the standard type 2-needle machine, which is essential for topstitching processes. As with the aforementioned 1-needle machine, the standard 2-needle machine has an outstanding high-speed capability and promises consistent sewing performance.

3,500sti/min

Higher lift of the presser foot

- The machine is provided as standard with a pneumatic auto-lifter.
- The high, 16mm presser foot lift enables easy material handling.

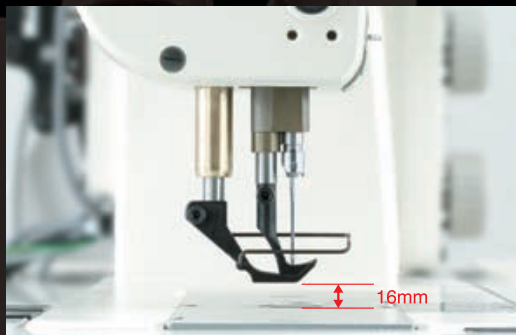

The walking foot and presser foot's alternating vertical movement can be set and changed with ease.


- The vertical strokes of the presser foot and walking foot (alternating vertical movement) can be easily changed using a large dial mounted on the top surface of the machine head.
- In addition the sewing speed is automatically adjusted with the set value. With this feature, ideal sewing conditions are maintained at all times.



The machine promises outstanding adaptability and ease of use with its full-fledged functions.


The highly efficient vertical-axis 1.6 fold-capacity hook is provided as standard.

- With the adoption of this vertical-axis 1.6 fold-capacity hook, the frequency of bobbin thread winding is reduced, promising sewing work of increased efficiency.

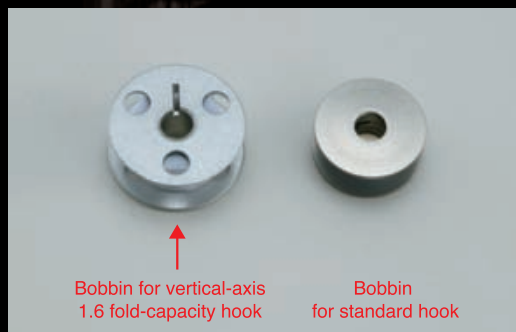

Instantaneous change-over device for the alternate vertical movement amount (DL device) is provided as standard.

- The alternate vertical movement amount can be instantaneously maximized in a process for sewing a hard-to-feed part of material, such as a multilayered part, finishing with beautiful seams free from stitch gathering.
- The machine is provided with both a hand switch and knee switch.

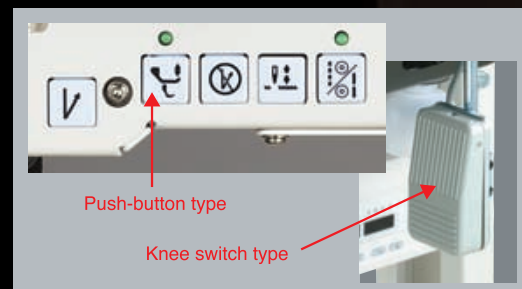


High-speed, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis Large Hook and Automatic Thread Trimmer

LU-2212N-7 1.6 fold-capacity hook / 2-pitch dial type

One of two different stitch lengths can be selected according to the application.

The stitch length can be instantaneously changed over by pressing the stitch selector switch mounted on the lower part of the machine arm.

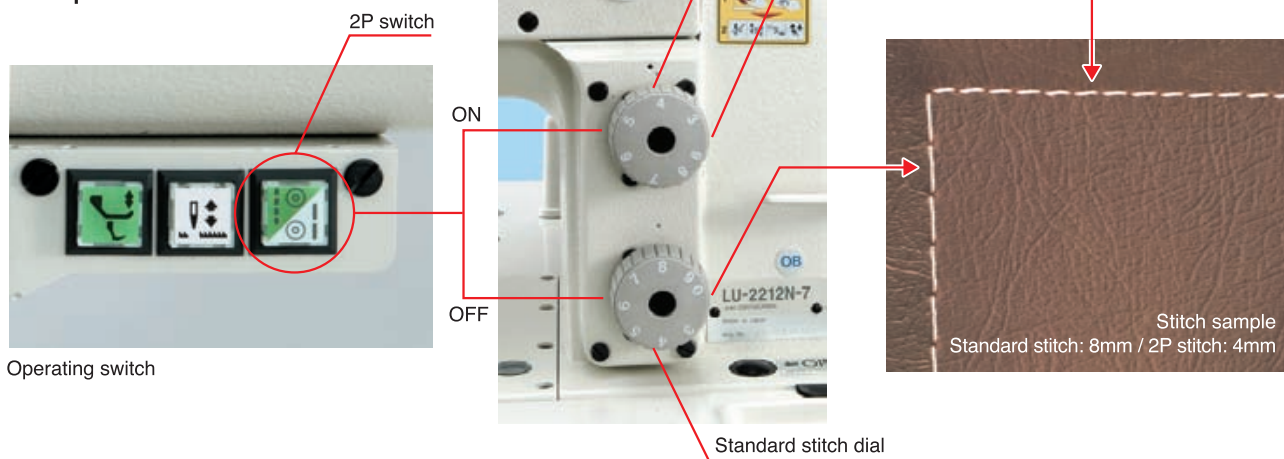

High-speed, 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis Large Hook and Automatic Thread Trimmer

LU-2220N-7 1.6 fold-capacity hook / 2-pitch dial / Shorter thread remaining type


Thread nipping work required at the beginning and end of sewing is reduced. This is a high-performance machine which contributes to both increased productivity and improved quality for sewing car seats. Frequency of the use of scissors by the operator is reduced, thereby helping prevent the material from being damaged.



[Comparison of the remaining thread length]


Upper side: LU-2210N-7 / Lower side: LU-2220N-7

Right side of the material at the beginning of sewing



The needle thread does not remain on the right side of the material.

Wrong side of the material at the end of sewing



Remaining-thread length: 5mm



Operating switch



Needle thread clamping at the beginning of sewing can be turned ON/OFF.

The thread trimming mechanism has been totally redesigned to shorten the length of thread remaining on the material at the end of sewing down to 5 mm.

















ATTACHMENTS

| Description | Part No. |
|--------------------------------------|--------------|
| Suspended ruler (asm.) H152 | MAH-152010A0 |
| Suspended ruler mounting base (asm.) | 107-35868 |

*Suspended ruler mounting base (asm.) is required to mount the suspended ruler.




INTERCHANGEABLE GAUGE PARTS

[LU-2210N-7] [LU-2210W-7] [LU-2212N-7] [LU-2220N-7]

| Application | | Walking foot | | Presser foot | |
|---|---|-----------------|-------------------------------|--------------|---|
| Standard |  | A | Standard | 107-11653 |  |
| | | | | | |
| | | | | | |
| For material with overlapped section |  | B | For urethane | 107-11752 |  |
| Allows the smooth feed of multi-layered portions of the material | | | | | |
| For light-weight sponge |  | | | | |
| Used for resilient materials including sponge | | C | Right single-sided | 107-11851 |  |
| For heavy-weight sponge | Thick  | | | | |
| Used for more resilient materials | | | | | |
| Right single-sided presser |  | D | Left single-sided | 107-11950 |  |
| Used for sewing material edges | 1mm | | | | |
| Left single-sided presser |  | | | | |
| Used for sewing material edges | 1mm | E~H | For piping | 107-12552 |  |
| For piping |  | | | | |
| Used for the general piping process | | | | | |
| For piping |  | J~M | Adjustable presser for piping | 107-12651 |  |
| The position of the needle can be adjusted according to the pipe to be sewn | Adjustable | | | | |
| | | | | | |
| Wide type |  | (special order) | 107-12057 | 107-12750 |  |
| To be used when a sewing product cannot be smoothly fed | | | | | |
| | | | | | |








INTERCHANGEABLE GAUGE PARTS

●Throat plate








| For LU-2210N-7 / 2212N-7 | | For LU-2220N-7* |
|---|---|---|
|  |  |  |
| 107-01704 | 107-02009 | 400-58071 |
| Standard | Wide type (special order) | Standard |

*Throat plate (400-58071) for the LU-2220N-7 is also applicable to the LU-2210N-7/LU2212N-7.

●Feed dog

| For LU-2210N-7 / 2212N-7 | | | |
|---|---|---|---|
|  |  |  |  |
| 107-17106 | 107-17205 | 107-17304 | 107-39001 |
| S Standard (thread groove width: 1.0mm) | A Without groove (To be used if the needle thread and bobbin thread do not intertwine with each other at the beginning of sewing) | B For thin thread (thread groove width: 1.0mm) | ● Wide type (special order) |
| For LU-2220N-7 | | | |
|  |  |  | |
| 400-58070 | 400-64353 | 400-62827 | |
| S Standard (thread groove width: 1.0mm) | B For thin thread (thread groove width: 1.0mm) | C For thick thread (thread groove width: 1.9mm) | |

[LU-2260N-7] [LU-2260W-7]



| Needle gauge | Gauge* set No. | Needle clamp | Presser foot | Walking foot | Throat plate | Feed dog | Slide plate* | |
|---|-------------------|---|---|---|--|---|---|-----------|
| | | | | | | | Left | Right |
|  | |  |  |  |  |  |  | |
| 6mm | 107-84650 | 107-77654 | 107-81656 | 107-83157 | 107-84601 | 107-80104 | 107-86309 | 107-01803 |
| 8mm | 107-84759 | 107-77753 | 107-81755 | 107-83256 | 107-84700 | 107-80203 | | |
| 10mm (standard) | 107-84858 | 107-77852 | 107-81755 | 107-83355 | 107-84809 | 107-80302 | 107-86408 | 107-86002 |
| 12mm | 107-84957 | 107-77951 | 107-80401 | 107-83454 | 107-84908 | 107-80401 | | |
| 20mm | 107-85350 | 107-78355 | 107-82357 | 107-83850 | 107-85301 | 107-80807 | 107-86507 | 107-86101 |

Note) Applicable to gauges "4 mm to 36 mm" (LU-2260N-7) and "4 mm to 30 mm" (LU-2260W-7).

Any gauges other than the forementioned are available through special order.

*The right and left slide plates are not included in the parts represented by the gauge set number.

WHEN YOU PLACE ORDERS

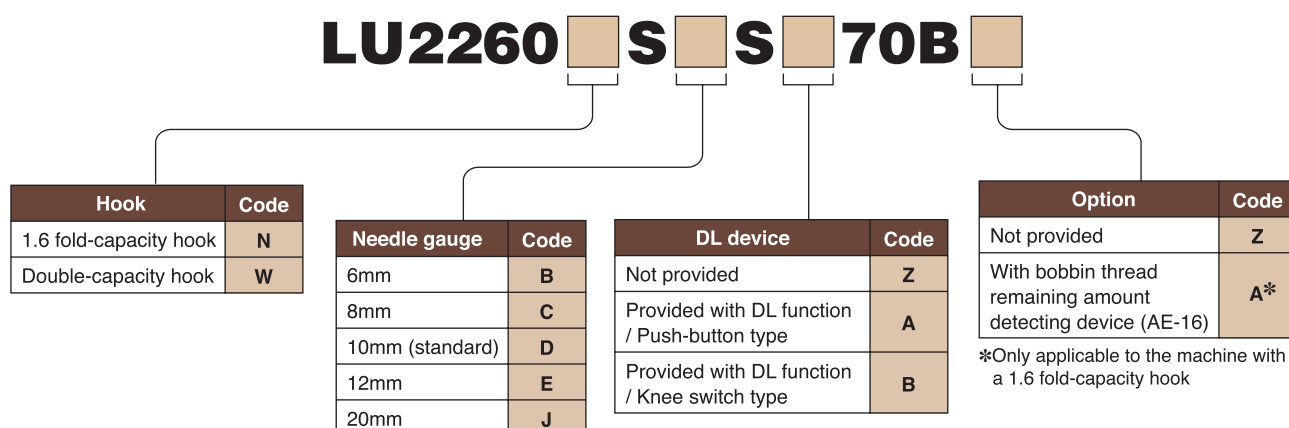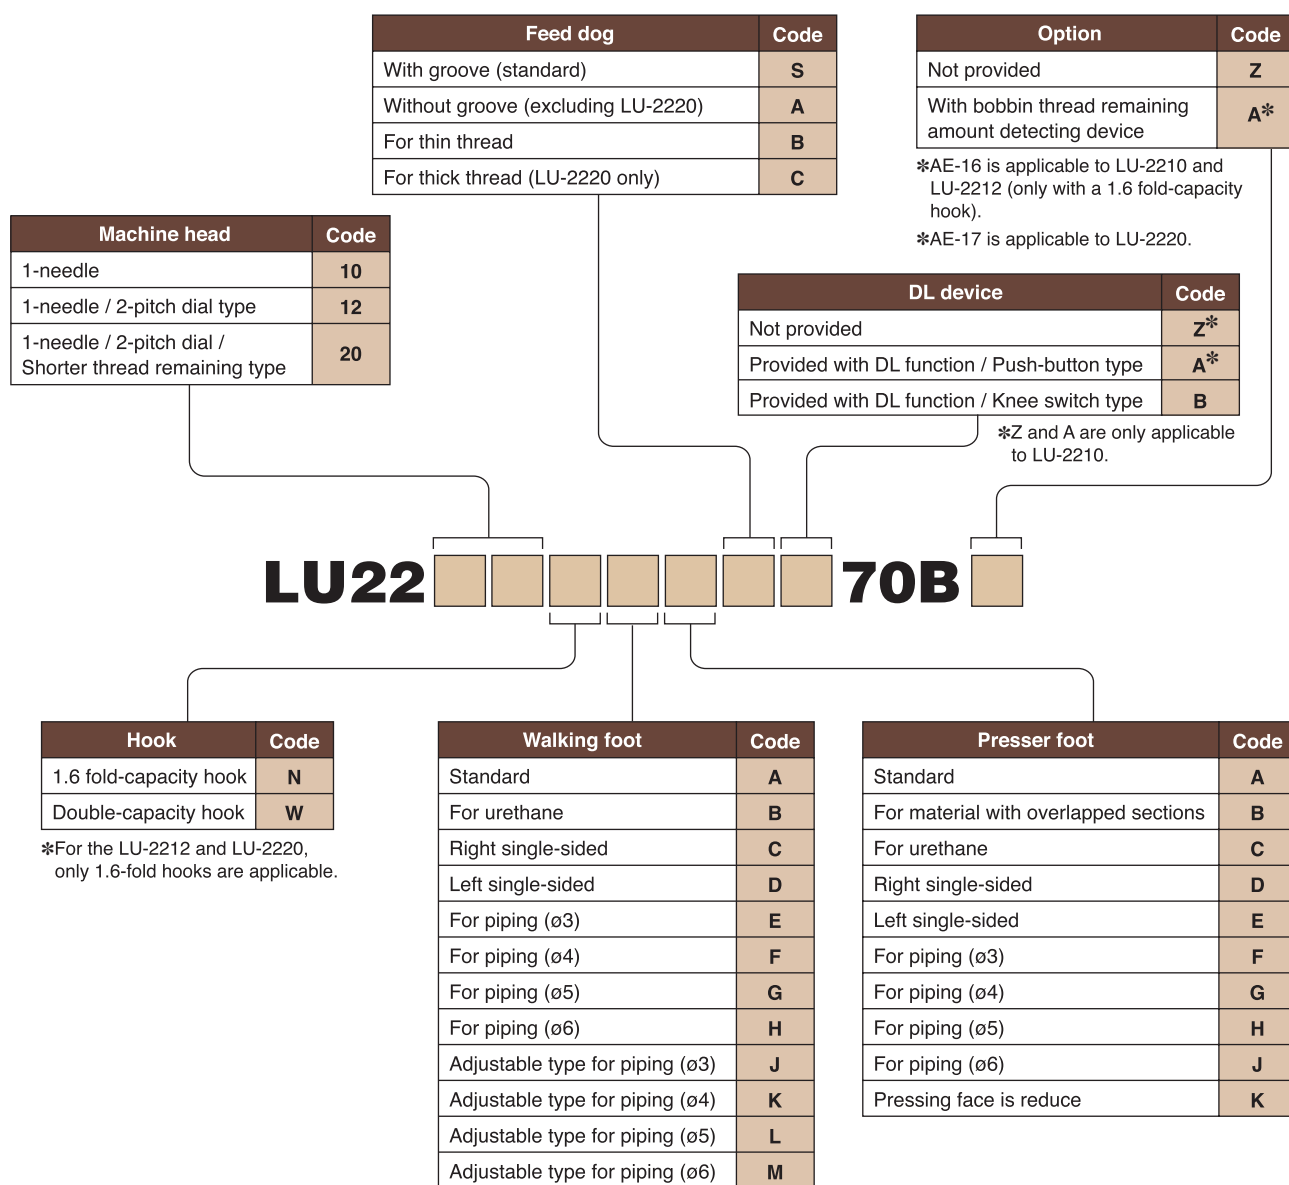

SPECIFICATIONS

| Model name | LU-2210N-7 LU-2210W-7 | LU-2212N-7 | LU-2220N-7 | LU-2260N-7 LU-2260W-7 |
|-------------------------------------|--|---|--|--|
| | 1-needle | 1-needle / 2-pitch dial type | 1-needle / 2-pitch dial / Shorter thread remaining type | 2-needle |
| Max. sewing speed | 3,500sti/min* | | | |
| Max. stitch length | 9mm (forward/backward) | | | 6mm (forward/backward) |
| Needle bar stroke | 33.8mm | | | |
| Max. lift of the presser foot | Auto: 16mm, By hand: 9mm | | | |
| Alternating vertical movement | 1mm～6.5mm (by dial) | | | |
| Thread take-up | Link type | | | |
| Hook | N: Vertical-axis 1.6 fold-capacity hook W: Vertical-axis double-capacity hook | N: Vertical-axis 1.6 fold-capacity hook | | N: Vertical-axis 1.6 fold-capacity hook W: Vertical-axis double-capacity hook |
| Needle | 134×35R (Nm140) Nm110～Nm160 | | | |
| Thread | #30～#4, B46～B138, Nm60/3～20/3 | | | #20～#5, B64～B138, Nm40/3～20/3 |
| Distance from needle to machine arm | 263.5mm | | | |
| Lubrication | Automatic | | | |
| Bobbin thread winder | Built on the machine head | | | |
| Safety mechanism | Provided as standard | | | |
| Automatic reverse feed function | Provided as standard | | | |
| Auto-lifter | Provided as standard (pneumatic auto-lifter) | | | |
| Compressed air | 0.5MPa | | | |
| Air consumption | 0.763d㎡/min (ANR) | 1.078d㎡/min (ANR) | 1.337d㎡/min (ANR) | 0.736d㎡/min (ANR) |
| Weight of the machine head | 55kg | | | 58kg |
| Power requirement | Single-phase 100～120V, 200～240V 3-phase 200～240V | | | |
| Power consumption | 425VA | | | |

* "sti/min" stands for "Stiches per Minute"

JUKI®
JUKI CORPORATION
INDUSTRIAL SEWING MACHINE DIV.

2-11-1, TSURUMAKI, TAMA-SHI,
TOKYO 206-8551, JAPAN
PHONE : (81) 42-357-2254
FAX : (81) 42-357-2274
<http://www.juki.com>

* Specifications and appearance are subject to change without prior notice for improvement.
* Read the instruction manual before putting the machine into service to ensure safety.
* This catalogue prints with environment-friendly soy ink on recycle paper.



JUKI CORPORATION HEAD OFFICE
An environmental management system to promote and conduct the following:
(1) Eco-friendly development of products and technologies
(2) Green procurement and green purchasing
(3) Energy conservation (reduction in carbon-dioxide emissions)
(4) Resource saving (reduction of papers purchased, etc.)
(5) Reduction and recycling of waste
in the activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.