

***ENGLISH***

**JUKI Smart App  
INSTRUCTION MANUAL**

# CONTENTS


Operating environment.....	1
1. Displaying a sewing pattern data.....	1
1-1. Obtaining from a sewing machine .....	1
1-2. Loading from a file .....	2
2. Transmitting the sewing pattern data to a sewing machine.....	3
3. Saving the sewing pattern data in a file .....	4
4. Displaying a memory switch data.....	5
4-1. Obtaining from a sewing machine .....	5
4-2. Loading from a file .....	6
5. Transmitting the memory switch data to a sewing machine.....	7
6. Saving the memory switch data in a file .....	8
7. Displaying a maintenance data .....	9
7-1. Obtaining from a sewing machine .....	9
7-2. Loading from a file .....	10
8. Saving the maintenance data in a file.....	11

## Operating environment


Guaranteed operating environment	Android 5.0 (API Level 21) or later, NFC corresponding terminal	
Guaranteed operating screen size	Tablet	1024×768dp or more
	Smartphone	640×360dp or more
Guaranteed operating environment	Tablet	Nexus 9 (Android 6.0)
	Smartphone	ASUSTek ZenFone2 (Android 5.0) Samsung Galaxy S5(Android 5.0, 6.0.1)

### 1. Displaying a sewing pattern data


#### 1-1. Obtaining from a sewing machine

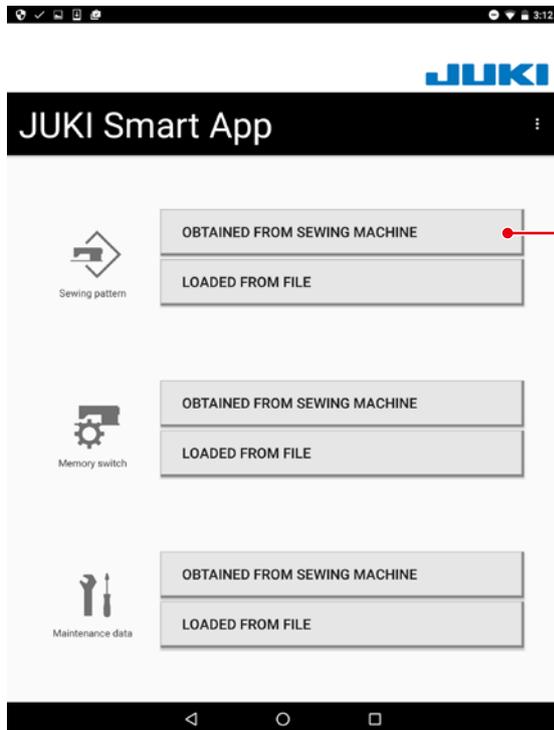

1) Press the “OBTAINED FROM SEWING MACHINE” button ① of Sewing pattern.

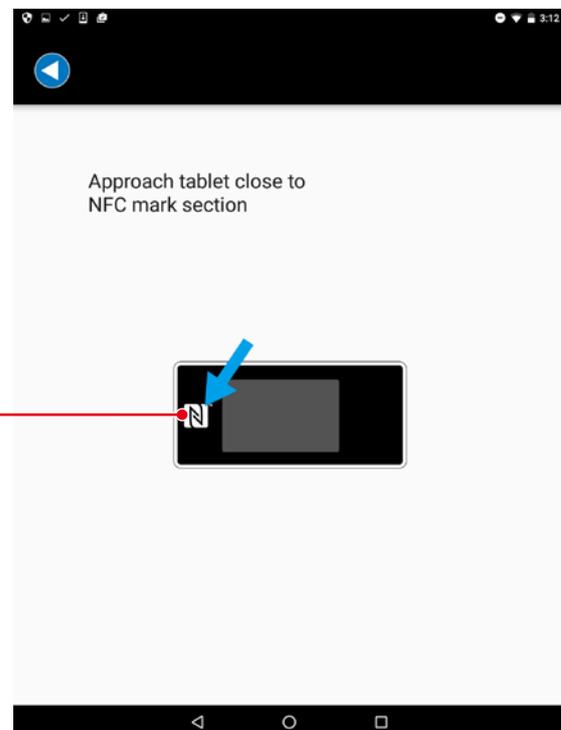


2) Approach the tablet close to the NFC mark ② on a panel.

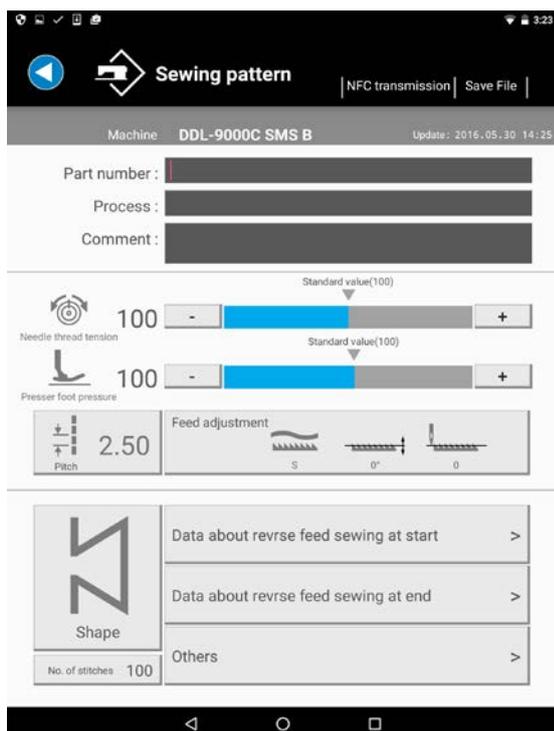


3) A sewing pattern data edit screen is displayed.


## 1-2. Loading from a file

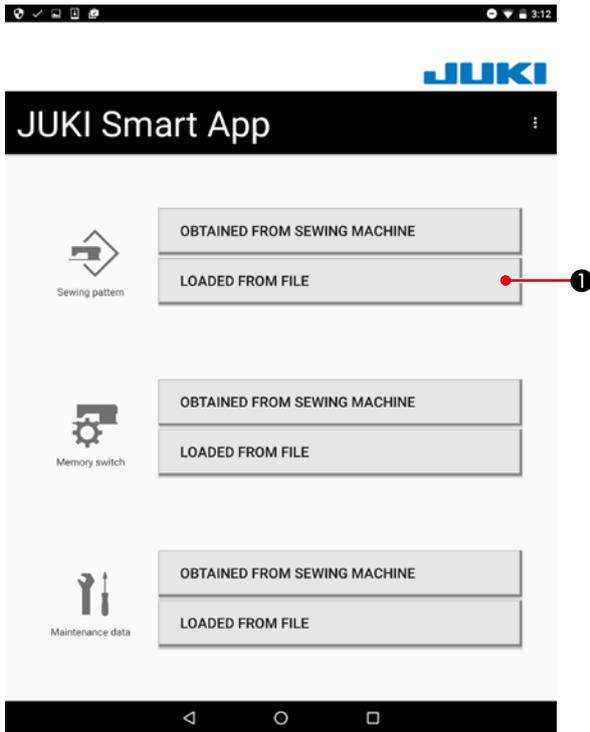


1) Press the “LOADED FROM FILE” button ❶ of Sewing pattern.

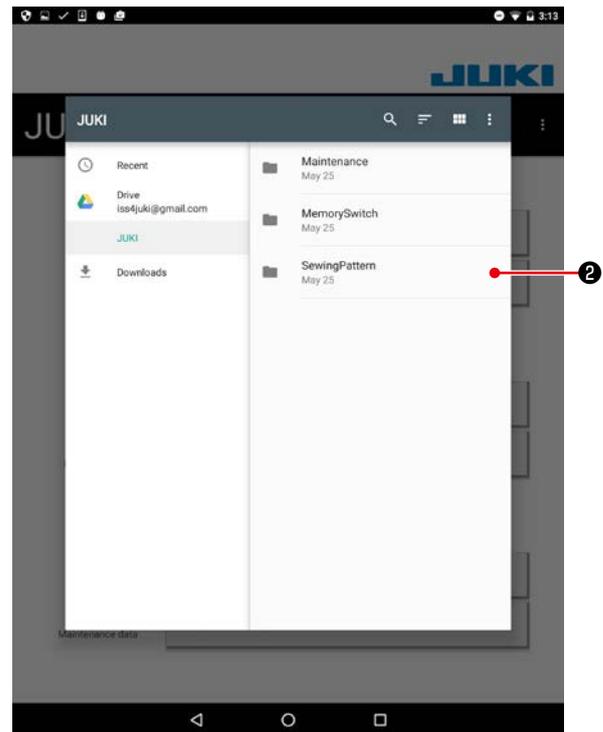

2) Select the “JUKI” - “SewingPattern” folder ❷.

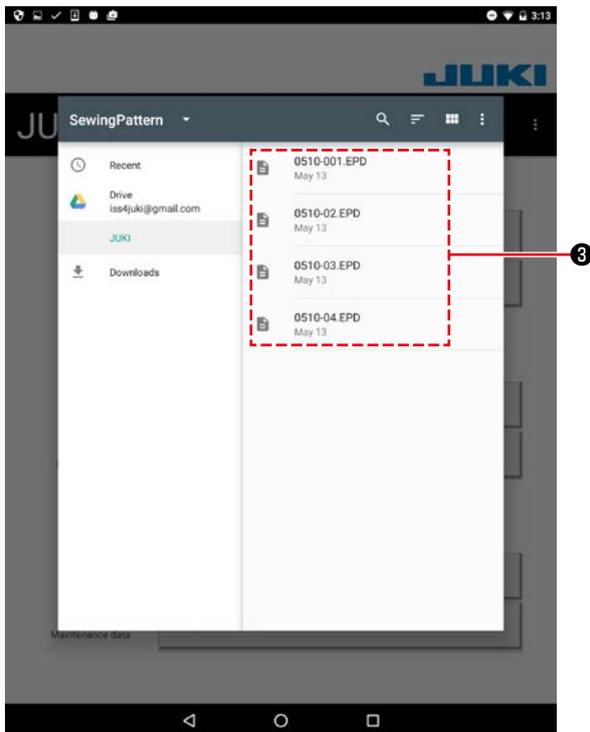


3) Select the sewing pattern data file (\*.EPD) ❸.

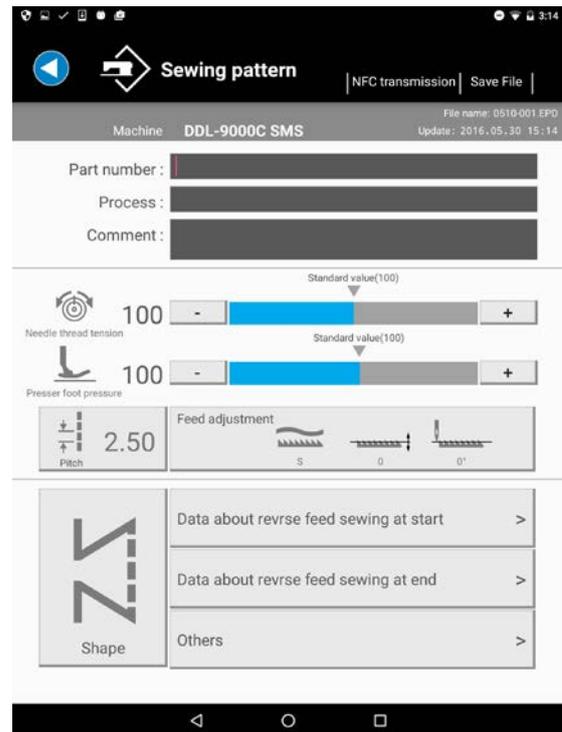


4) A sewing pattern edit screen is displayed.

## 2. Transmitting the sewing pattern data to a sewing machine

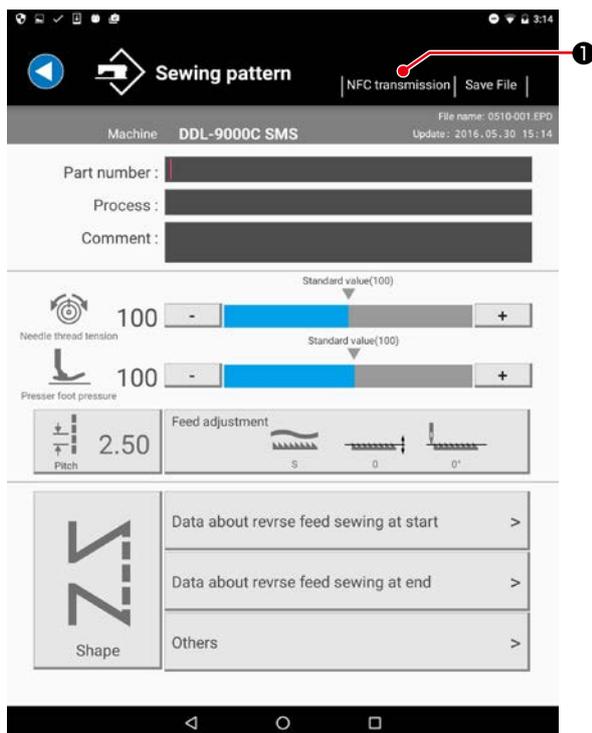


1) Press the “NFC transmission” button ① right above.

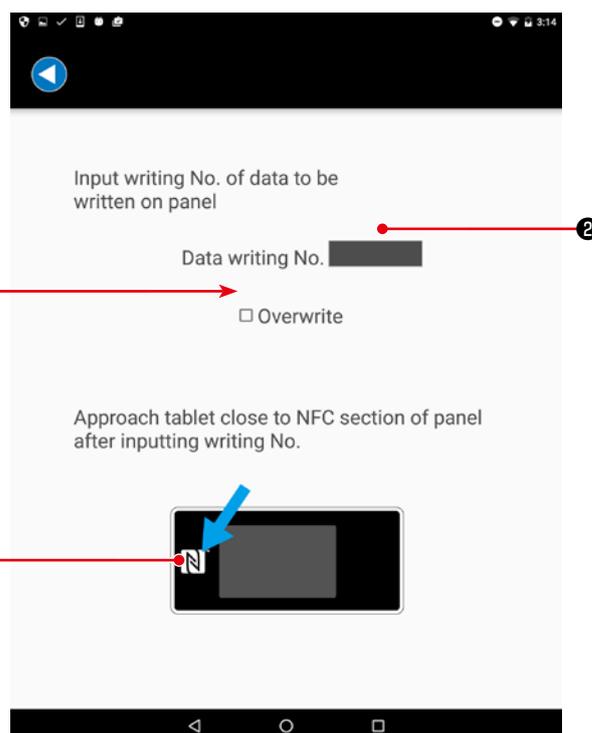


2) Input a pattern No. ② to be written.  
\* Check the checkbox “Overwrite” ③ when overwriting the existing pattern.

3) Touch the NFC mark ④ on a panel.  
When the transmission is successful, the screen returns to the sewing pattern edit screen.  
\* When the transmission is not successful, an error message is displayed.


### 3. Saving the sewing pattern data in a file

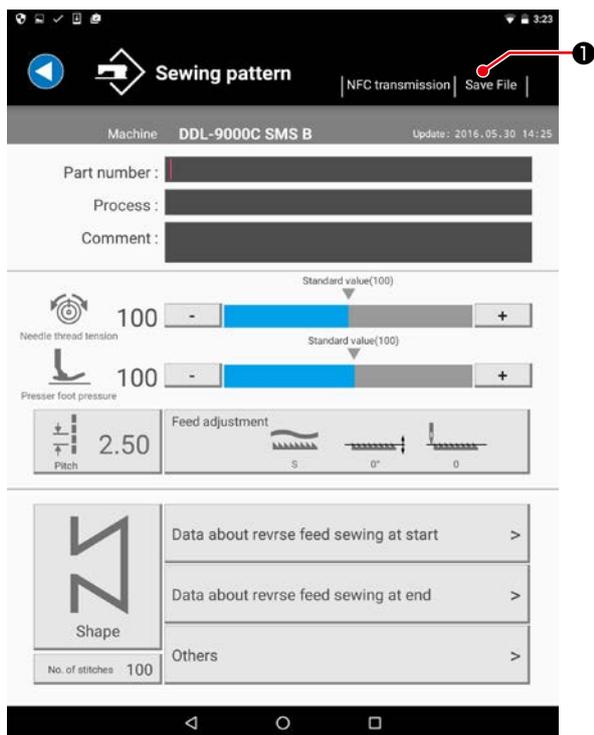

1) Press the “Save File” button ❶ right above.

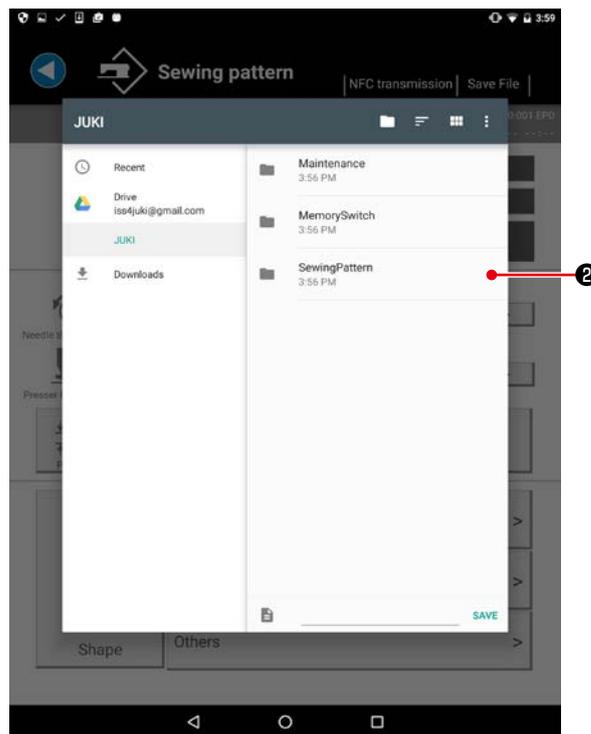

2) Select the “JUKI” - “SewingPattern” folder ❷.

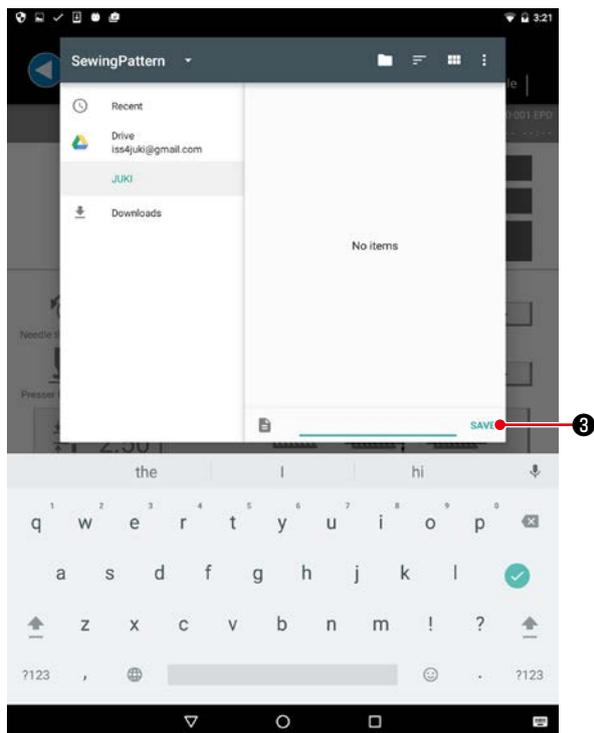


3) Input a file name and press the “Save” button ❸.

\* The sewing pattern data can be saved only in the “SewingPattern” folder ❷.


\* To delete a file, use the file management tool of a tablet.

## 4. Displaying a memory switch data


### 4-1. Obtaining from a sewing machine

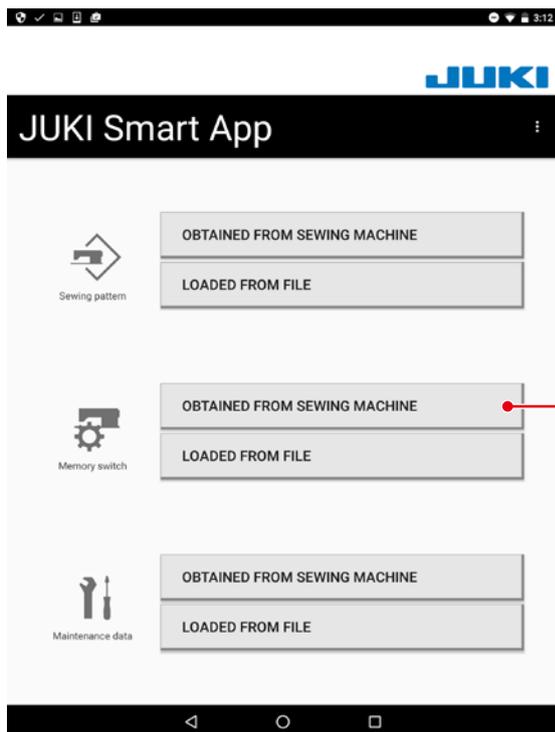

1) Press the “OBTAINED FROM SEWING MACHINE” button ❶ of Memory switch.

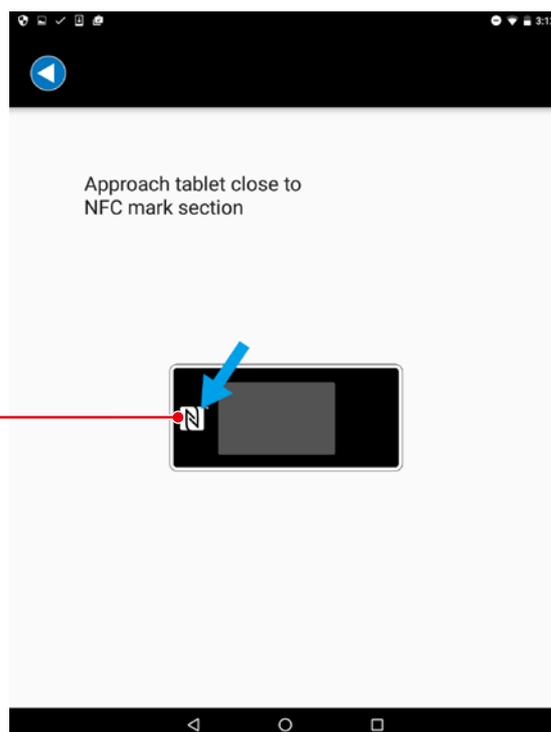


2) Approach the tablet close to the NFC mark ❷ on a panel.

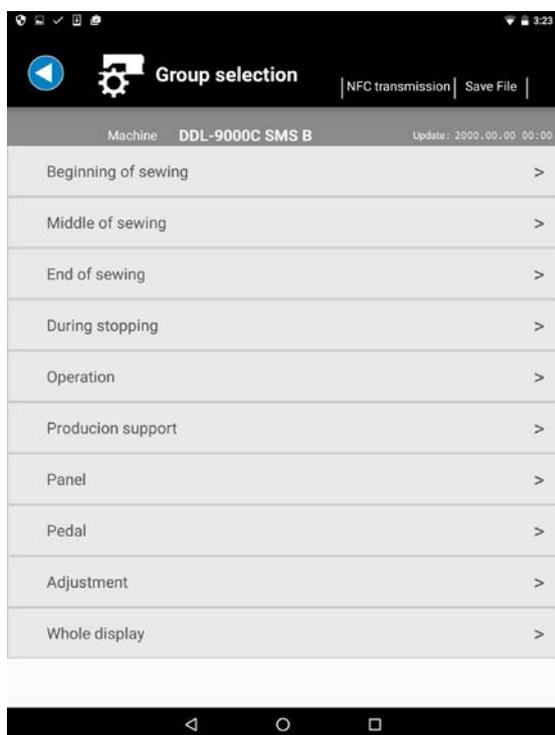


3) A memory switch data edit screen is displayed.


## 4-2. Loading from a file

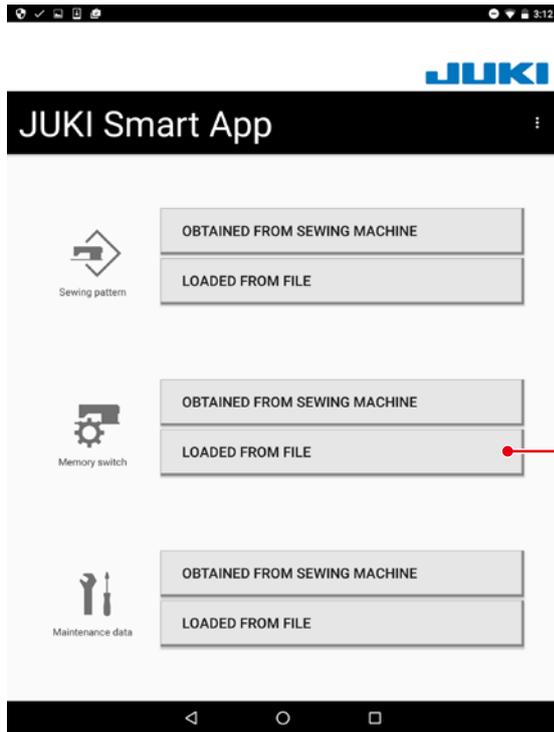


1) Press the “LOADED FROM FILE” button ① of Memory switch.

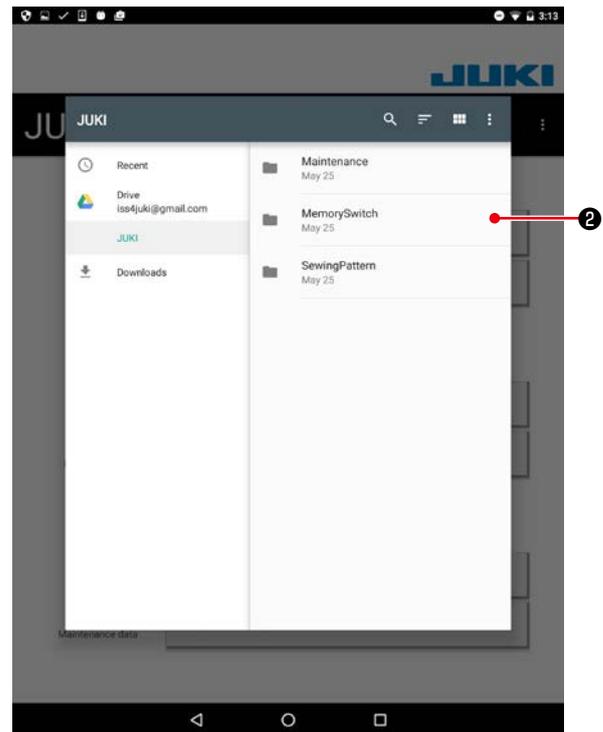

2) Select the “JUKI” - “MemorySwitch” folder ②.

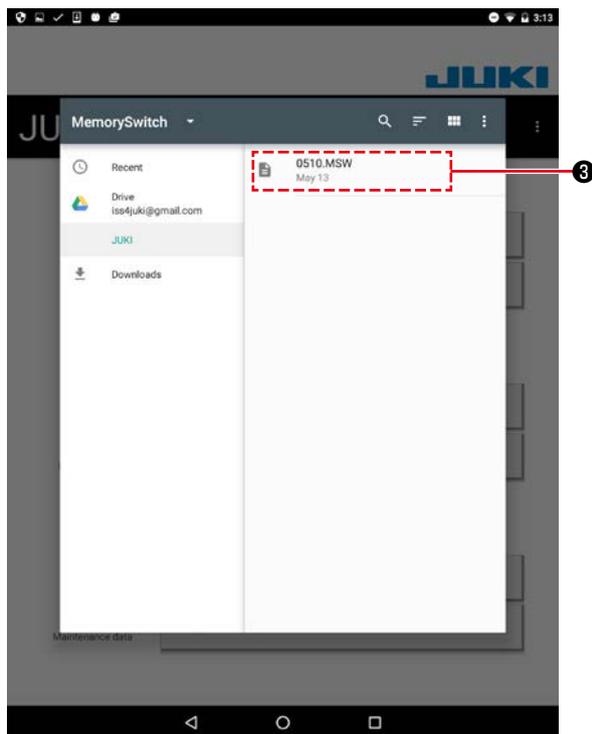


3) Select the memory switch data file (\*.MSW) ③.

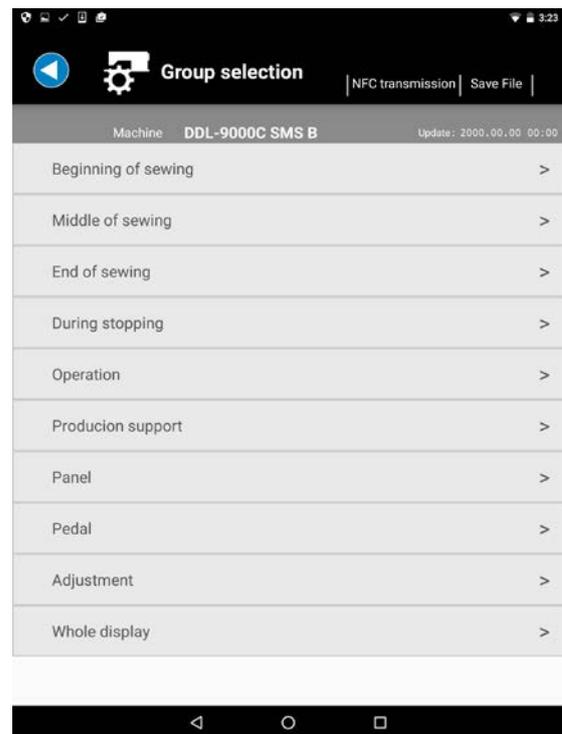


4) A memory switch group selection screen is displayed.

## 5. Transmitting the memory switch data to a sewing machine

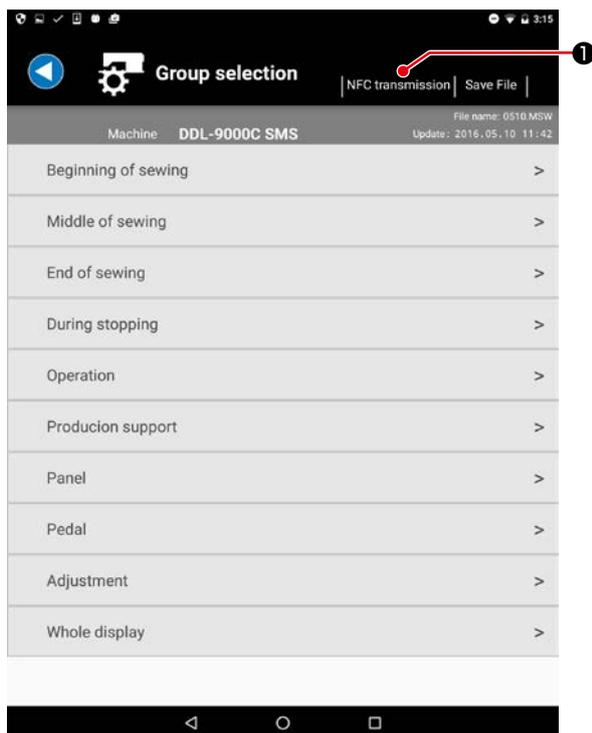


1) Press the “NFC transmission” button ❶ right above.

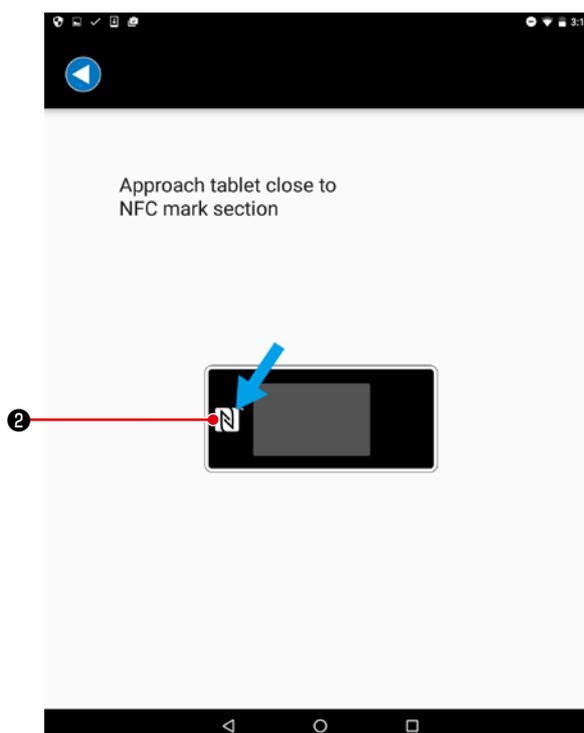


2) Touch the NFC mark ❷ on a panel.  
When the transmission is successful, the screen returns to the memory switch group selection screen.

\* When the transmission is not successful, an error message is displayed.


## 6. Saving the memory switch data in a file

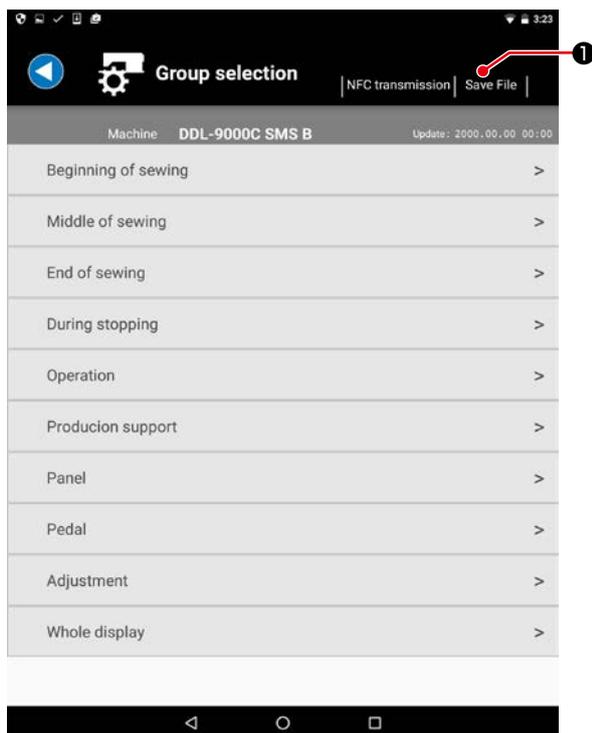

1) Press the “Save File” button ❶ right above.

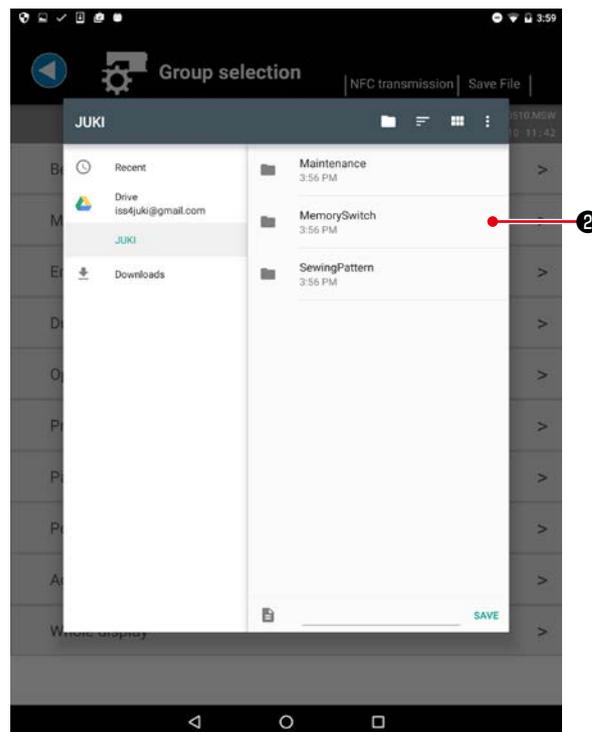

2) Select the “JUKI” - “MemorySwitch” folder ❷.

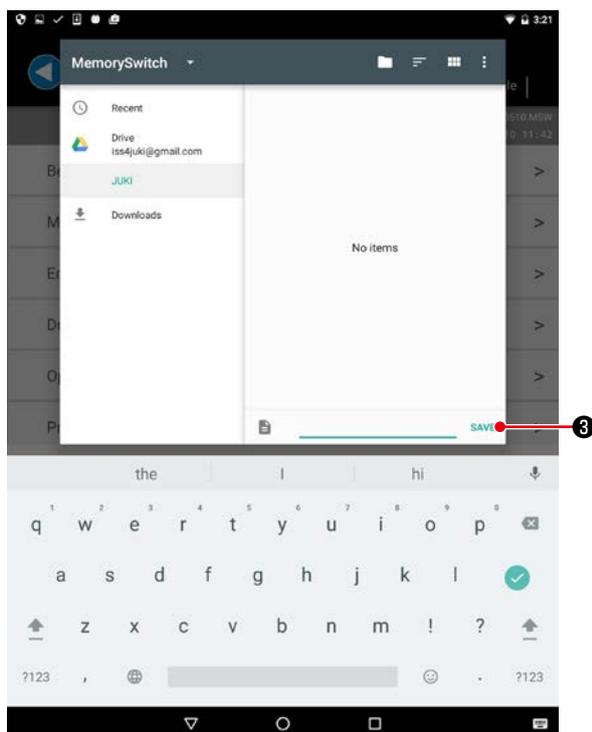


3) Input a file name and press the “Save” button ❸.

\* The sewing pattern data can be saved only in the “MemorySwitch” folder ❷.


\* To delete a file, use the file management tool of a tablet.

## 7. Displaying a maintenance data


### 7-1. Obtaining from a sewing machine

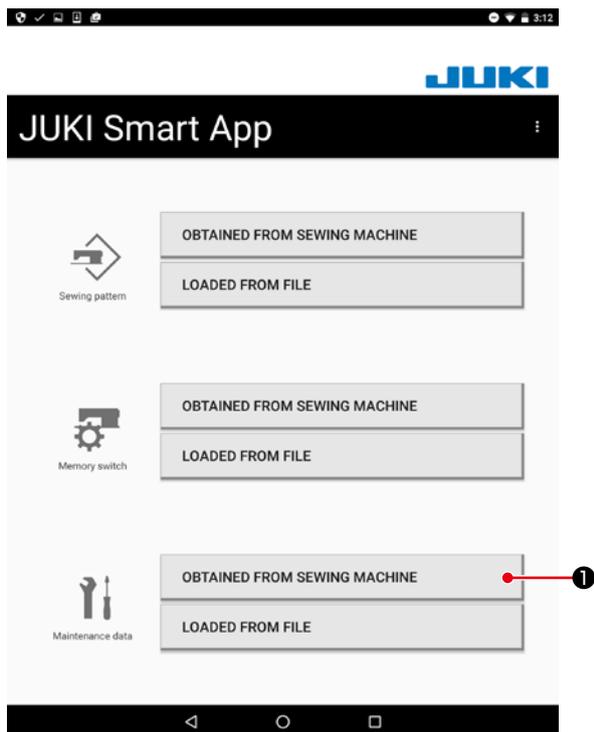

1) Press the “OBTAINED FROM SEWING MACHINE” button ❶ of Maintenance data.

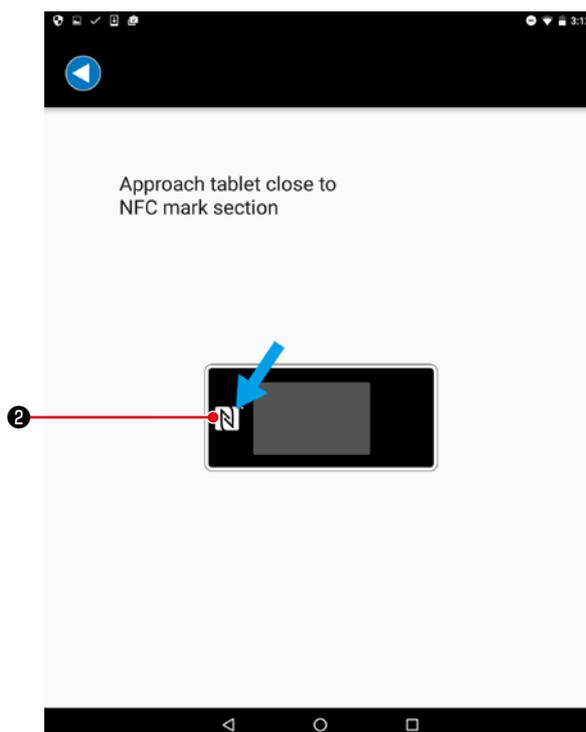


2) Approach the tablet close to the NFC mark ❷ on a panel.

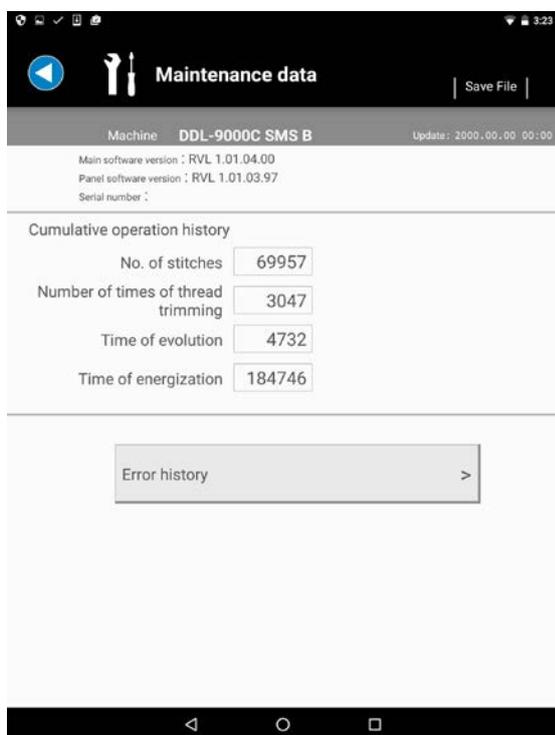


3) A maintenance data screen is displayed.


## 7-2. Loading from a file

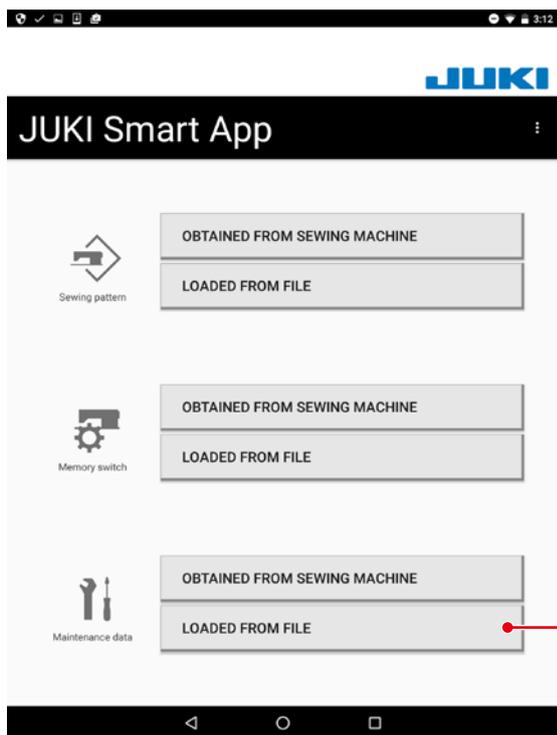


1) Press the “LOADED FROM FILE” button ① of Maintenance data.

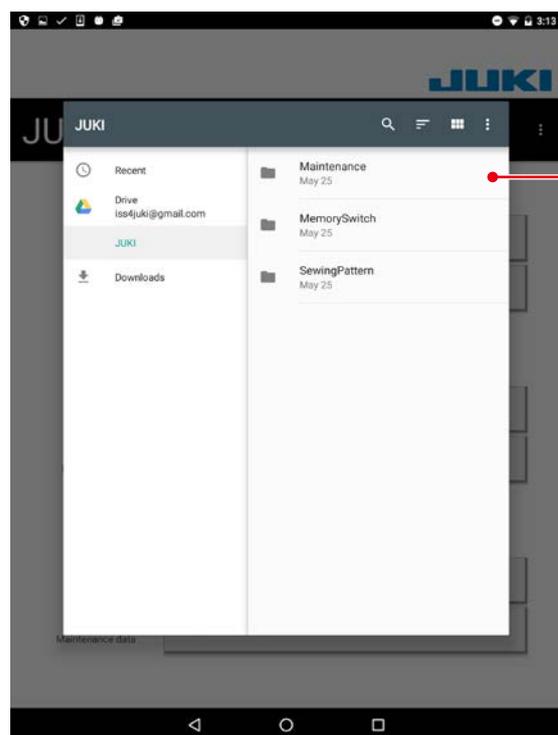

2) Select the “JUKI” - “Maintenance” folder ②.

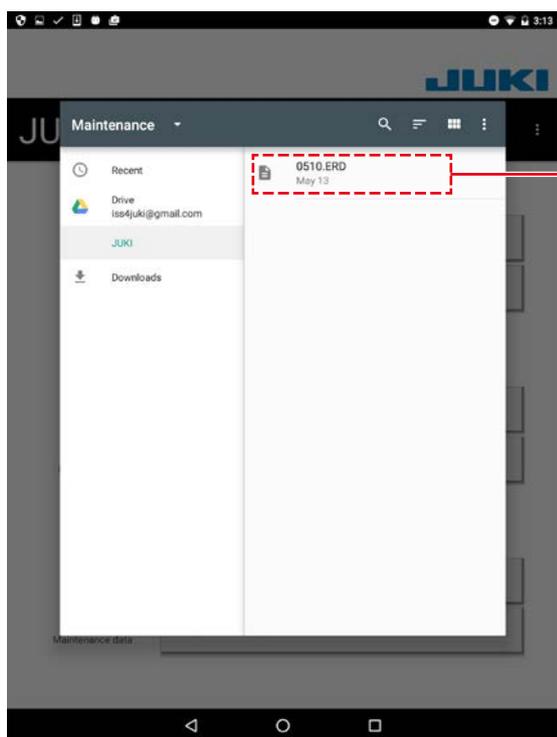


3) Select the maintenance data file (\*.ERD) ③.

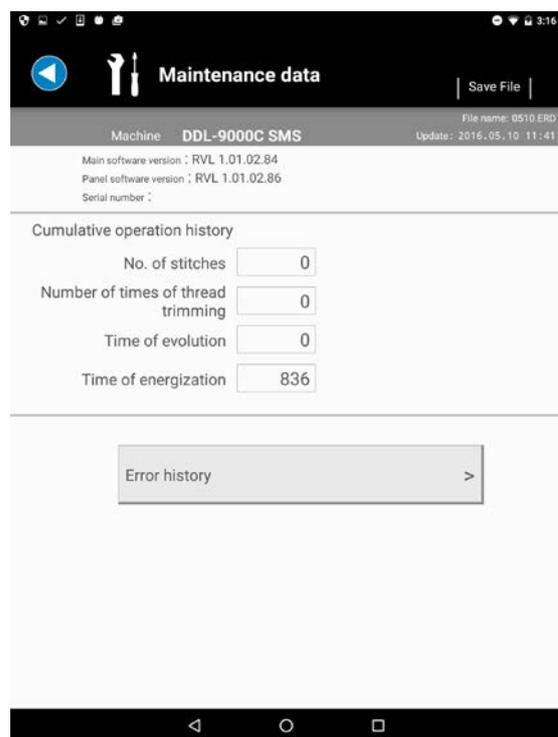


4) A maintenance data screen is displayed.

\* To delete a file, use the file management tool of a tablet.


## 8. Saving the maintenance data in a file

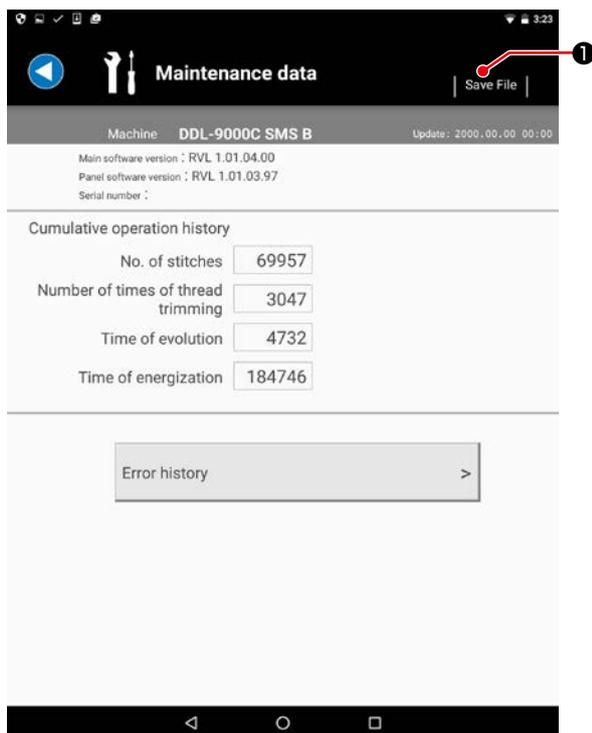

1) Press the “Save File” button ❶ right above.

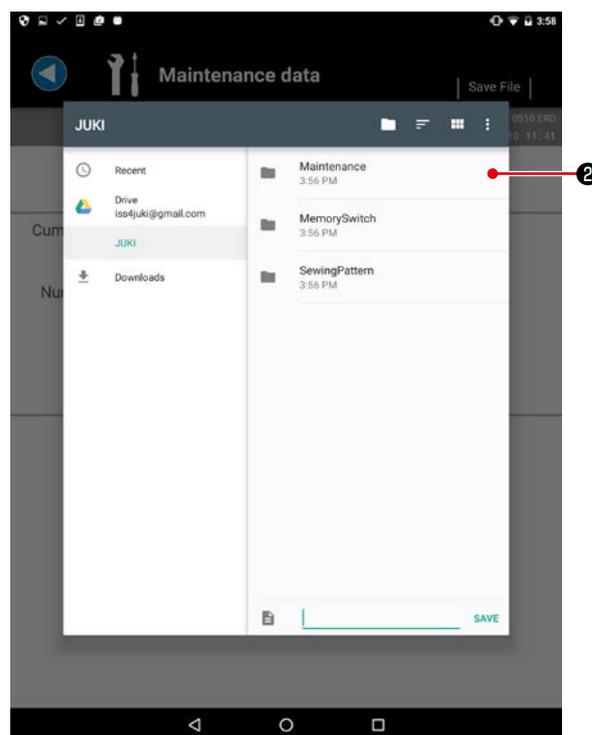

2) Select the “JUKI” - “Maintenance” folder ❷.

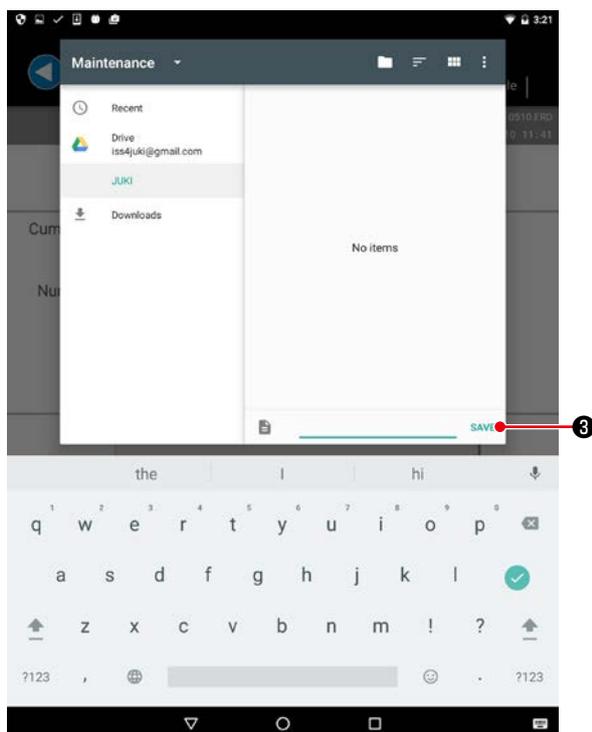

3) Input a file name and press the “Save” button ❸.

\* The sewing pattern data can be saved only in the “Maintenance” folder ❷.

\* To delete a file, use the file management tool of a tablet.