

SIRUBA®


銀箭牌工業用縫紉機
INDUSTRIAL SEWING MACHINE



visit us at <http://www.siruba.com/>



S007K / S007KD SERIES
High-speed small cylinder bed interlock stitch machine

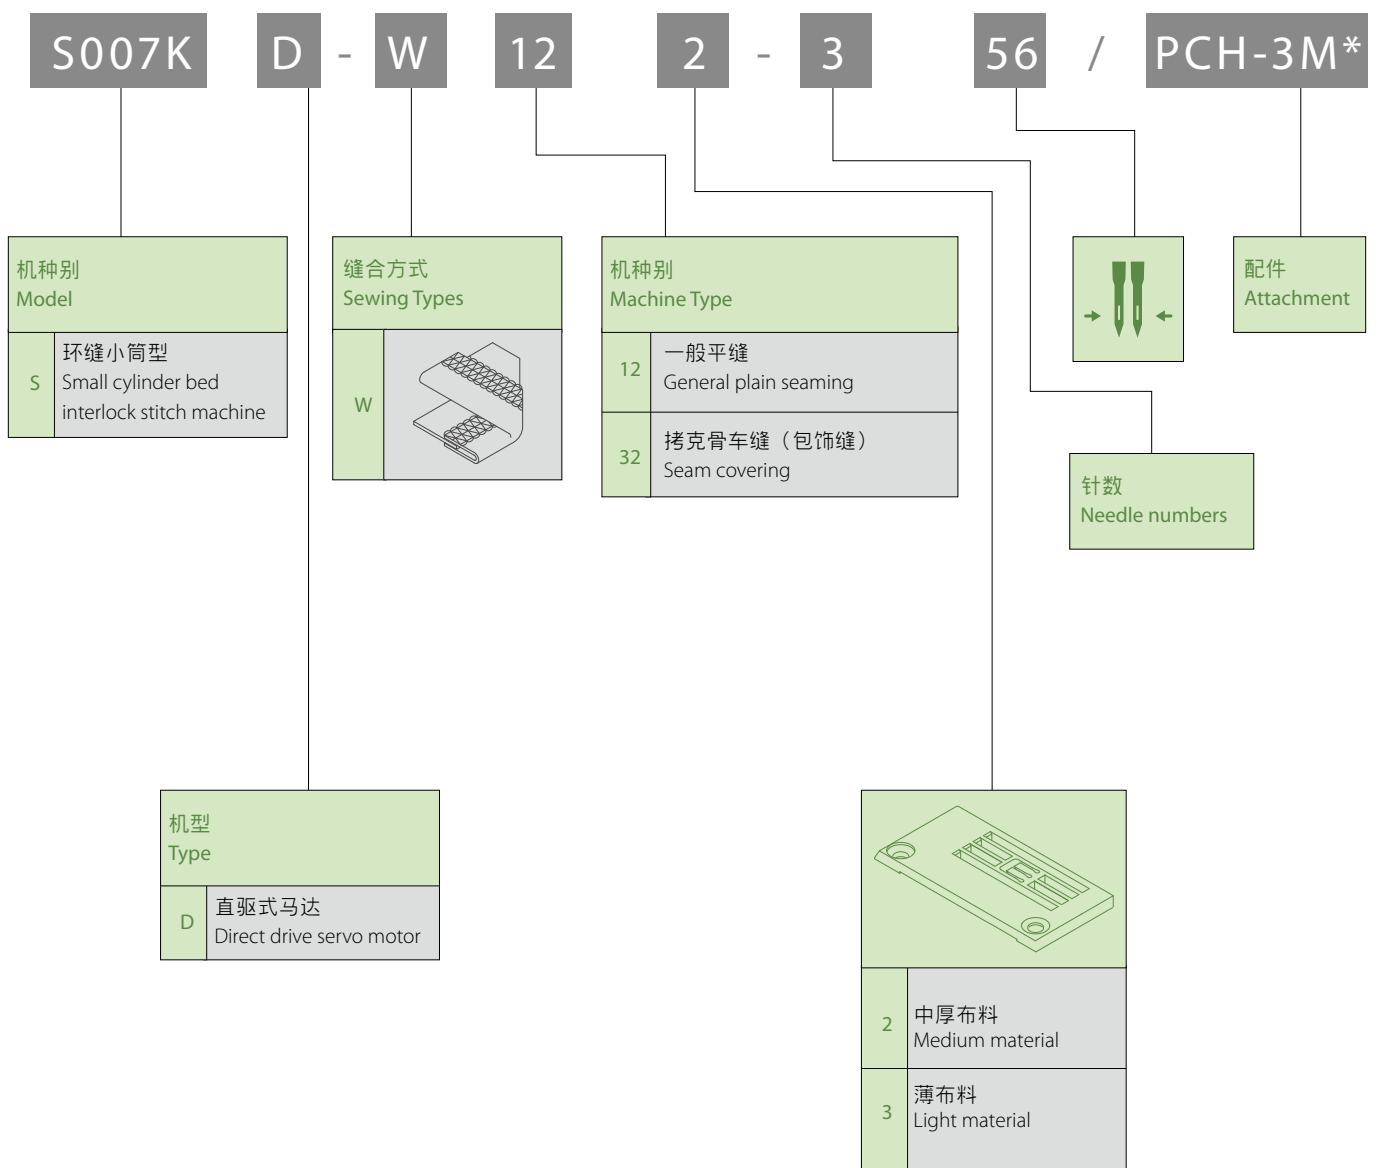

* 3M於成车内附 PCH / PCC / PCD 三种配件。
3M means 3 kinds of attachments as PCH / PCC / PCD.

CHARACTERISTICS

EASY SEWING ADJUSTMENT

轻松校缝

可调式针距调整钮、微调式护针机构及微调式差动机构，校缝轻松便利。

The adjustable stitch length by adjusting knob, fine tuning needle guard and fine tuning differential mechanism make the sewing adjustment easier.



NEW SEAM GUIDE

全新诱导器

全新牛角式诱导器，埋压拷克骨更为稳定。

New horn type seam guide makes the overlock seam covering steadier.



PREVENTION OF OIL STAINS

阻绝油渍

密封式侧盖设计阻绝侧盖渗油所致油污问题。

The sealed side cover can make the fabric free from oil stains.



QUICK RESPONSE PRESSER FOOT LIFTER

抬压脚灵敏

电磁直驱式抬压脚组，7mm抬升距为业界最高，不产生噪音，反应更灵敏。

The lifting height of presser foot lifter set, by electromagnetic direct driving type, is 7 mm which is the highest among the industries. Noise free and quick reaction.



FINE TUNING TRIMMER

可微调切线刀

底线切线刀可微调，切线稳定、校调方便。

The looper thread trimmer is able to be fine tuned, offering steady trimming and convenient adjusting.



DIFFERENTIAL FEEDING DESIGN OF LEVER TYPE

摇杆式差动设计

差动比达 1:0.8 至 1:1.4 为同级品最大值。摇杆式差动设计，不同布质皆能完美车缝。

Differential feed ratio is 1:0.8 to 1:1.4 which is the maximum range among the same level products. Due to the differential feeding design of lever type, the perfect sewing is available for various fabrics.



ACCURATE ADJUSTMENT OF LOOPER THREAD

底线调整精准

底线分线盘外置，清理、调整超简便。底线过线架可精细微调，车缝更精准。

Front exposed looper thread take-up mechanism makes cleaning and adjusting more convenient. After fine tuning the looper thread eyelet holder, the sewing can be more accurate.



THE EXTREMELY SMALL TUBULE


超小口径

筒边到中针距离仅31.4mm，超小口径181mm细筒型设计，车缝操作更顺畅。


The distance from cylinder edge to middle needle is only 31.4 mm. The small cylinder designed with 181 mm extremely small circumference makes sewing operation smoother.




下摆车缝及拷克骨车缝 Bottom hemming & Seam covering S007K(D)-W122-356/PCH-3M/UTT



PCH
拷下摆车缝
Bottom hemming




PCC
倒骨包缝(牛角式靠边器/中厚料用)
Overturned seam covering (Horn type seam guide for 3-thread overlock seam of medium weight fabrics)



PCD
倒骨包缝(简易靠边器/薄布料用)
Overturned seam covering (Basic type seam guide for 3-thread overlock seam of light weight fabrics)



S007K

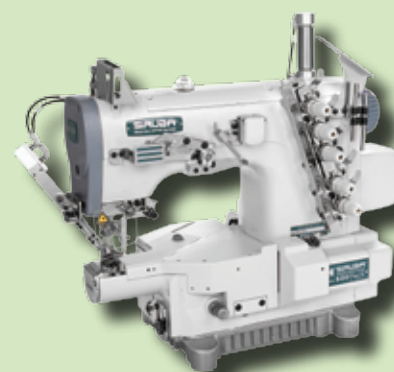


S007KD / UTT


3M为PCH、PCC、PCD配件组合；PCH-3M即以PCH校缝出车，随车附PCC、PCD配件。
3M means 3-in-1 model, including 3 kinds of attachments as PCH, PCC & PCD. PCH-3M basically presents a bottom hemming function by PCH, but also includes PCC & PCD enclosed.

x							
3	5	4.0 / 4.8 / 5.6 / 6.4	1.4 - 4.2	1:0.8 - 1:1.4	5	UYX128GAS #9-#14	4000

拷克骨包缝 Seam covering S007K(D)-W322-356/PCE/UTT



PCE
立骨包缝(牛角式靠边器/中厚料用)
Bulging seam covering (Horn type seam guide for 3-thread overlock seam of medium weight fabrics)

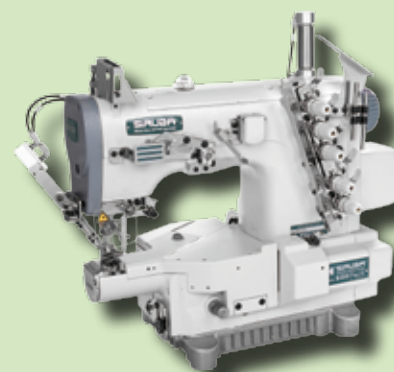

x							
3	5	4.0 / 4.8 / 5.6 / 6.4	1.4 - 4.2	1:0.8 - 1:1.4	5	UYX128GAS #9-#14	4000

ATTACHMENT



UTT
 气动式自动切上下线装置
 Pneumatic automatic top &
 under thread trimmer



UTU
 气动式自动切下线装置
 Pneumatic automatic under
 thread trimmer



UTX
 电动式自动切上下线装置
 Electric automatic top & under thread
 trimmer



UTY
 电动式自动切下线装置
 Electric automatic under
 thread trimmer



TA40XXX
 for direct drive series only
 220V 伺服马达
 Servo motor 220V



T740XXX
 220V 伺服马达
 Servo motor 220V