


銀箭牌
工業用縫紉機
SIRUBA®

visit us at <http://www.siruba.com/>



988 / 988D SERIES

Ultra-high speed direct type needle bar overlock safety stitch machine

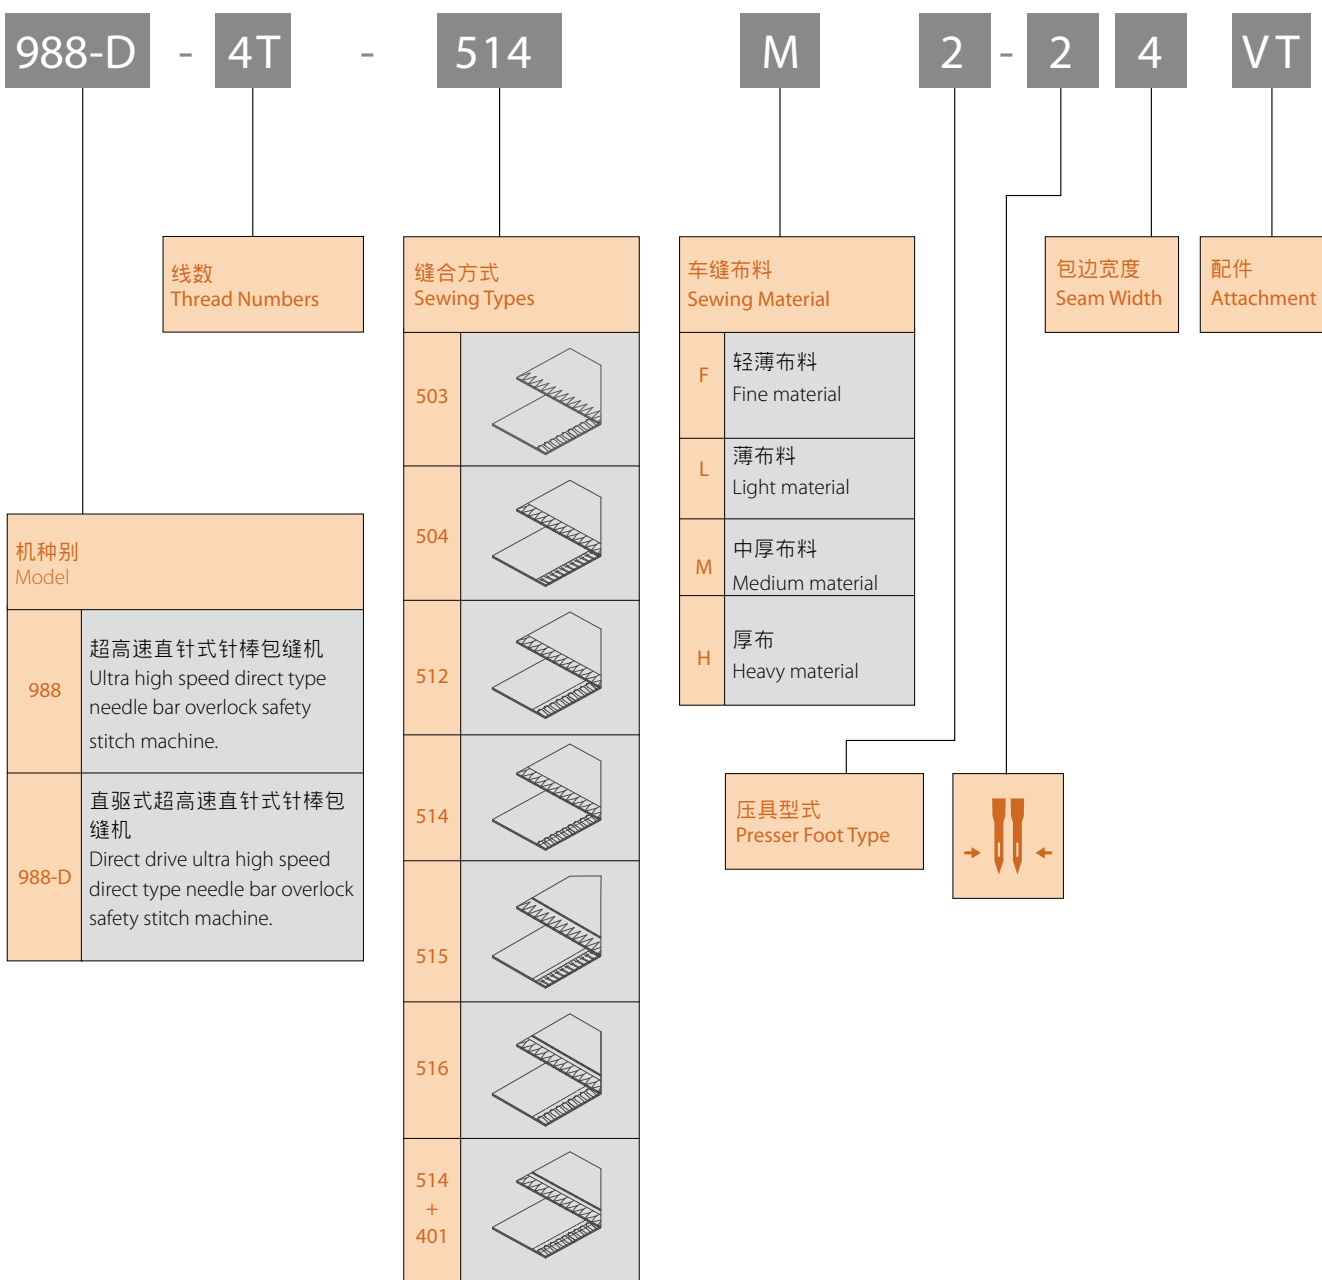

CHARACTERISTICS

OIL RETURN DESIGN FOR NEEDLE BAR SECTION

针棒吸油

为防止重要的缝制品沾染油污，增加一回油系统抽取润滑过程中因牵引带出来的油渍。

To prevent from being polluted by the oil sludge, an oil recycle system is added to clean the oil sludge from lubrication.



THREAD GUIDING SYSTEM

过线机构

可调整及刻划的设计，轻松完成下勾针前後移动与双链缝勾针前後移动的精确调整。

An adjustable design for you to accomplish accurate adjustments in back and forth movements of the lower looper and the looper of double chainstitch.



ACTIVE NEEDLE BAR LUBRICATION

针棒供油

本机种采全密封式设计，针棒供油系统采取直接给油方式。

An entirely sealed machine with direct oiling solution to oiling system. Directly oiling the needle bar system.



OILFREE FEED DOG MECHANISM

送具防油

在机构增加多层的防油机构达到完全阻油的目的，送具不会因需润滑而将油带出机器外。

Multi-layer oil proof mechanism outside the device can isolate the oil. The feed dog will no longer take the oil out during lubrication.



BOTTOM-FIT OIL CYCLING DESIGN

底部回油装置

针棒机构采循环式强制润滑设计，采取油泵强制真空回油，解决渗油问题。

Actively cycling lubrication of needle bar. Oil vacuum discharge pump. Solve the oil leaking!



COMPULSIVE OIL-FILTERING

强制滤油装置

独特之强制滤油与自动润滑装置。

Automatically oiling system with filter pump.



THREAD TENSION CONTROL SYSTEM

收线机构

车缝不同布料时，相对改变线的松紧度，微调的收线机构，使缝制品的品质能达到完美。

For different materials, changing the tensions as well. A mechanism for you to do micro adjustment of thread contraction, and improve the quality to perfection.



LED LIGHT

LED灯

具有高亮度、超省电之LED照明装置，体贴使用者在穿线及目视线迹之方便性。

LED device with high illumination and power save. Give convenience of threading and observing stitches.













INCREASE SEWING EFFICIENCY

提升工作效率

降低噪音不占空间，并节约40%的电力，大幅提升工作效率。

Reduces noise, occupies less space, and save the power up to 40% it will improve the work efficiency greatly.



MODEL	 x									
988-3T-504M2-04	1	3	-	4	-	0.7-2	3.8	5.5	#11	7500
988-3T-504M3-05	1	3	-	5	-	0.7-2	3.8	5.5	#11	7500
988-4T-512M1-25	2	4	2	5	7	0.7-2	3.8	6.0	#11	7500
988-4T-514M2-24	2	4	2	4	6	0.7-2	3.8	6.0	#11	7500
988-5T-516L1-24	2	5	2	4	6	0.7-2	3.8	6.0	#14	7500
988-5T-516L1-35	2	5	3	5	8	0.7-2	3.8	5.5	#14	7500
988-5T-516M2-35	2	5	3	5	8	0.7-2	3.8	5.5	#14	7500
988-5T-516M2-55	2	5	5	5	10	0.7-2	3.8	6.0	#14	7500
988-6T-516M2-324	3	6	3 X 2	4	9	0.7-2	3.8	6.0	#11	7000
988-6T-516M2-524	3	6	5 X 2	4	11	0.7-2	3.8	6.0	#11	7000

 高林股份有限公司
KAULIN MFG. CO., LTD.



SIRUBA[®]

The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

由於對產品的改良更新，本產品型錄中之產品規格及外觀的修改恕不事先通知。

CAT.S90-03-1C JUL. 2009