



USER'S MANUAL

Operating Manual

- **2/4/6/8/6C Tubular E-series**
- **4/6 Flat E-series**

- 1. THIS IS AN INSTRUCTION FOR SAFE USE OF *SMF*® AUTOMATIC EMBROIDERY MACHINES. READ THOROUGHLY BEFORE USE.**
- 2. CONTENTS IN THIS INSTRUCTION MAY CHANGE, WITHOUT PRIOR NOTICE, FOR IMPROVEMENT OF MACHINE QUALITY AND THUS MAY NOT CORRESPOND TO THE MACHINE YOU PURCHASED. CONTACT YOUR SALES AGENT FOR INQUIRIES.**
- 3. THIS IS DESIGNED AND MANUFACTURED AS AN INDUSTRIAL MACHINE. IT SHOULD NOT BE USED FOR OTHER THAN INDUSTRIAL PURPOSE.**

Table of Contents

1.0	Structure of Operation Box	1-1
1.1	Part Names and Functions	1-1
2.0	Preparation for Embroidery	2-1
2.1	Turn on the Power	2-1
2.2	Basic Operation Procedure	2-2
3.0	Operating Program Install	3-1
3.1.0	SWF Install Program	3-2
3.1.1	Install	3-2
3.1.2	Backup	3-4
3.1.3	Memory	3-5
3.1.4	System	3-6
3.2.0	Machine Setting Change	3-8
3.2.1	Specifications Setting	3-9
3.2.2	Machine and Signal Setting	3-12
4.0	Screen Layout of Operating Program	4-1
4.1	Embroidery Screen	4-1
4.2	Work Information Screen	4-2
4.3	Function Menu	4-3
4.4.0	Work Progress Messages and Clock Screen	4-4
4.4.1	Work Progress Messages	4-4
4.4.2	Date and Time Change	4-5
5.0	Function Menu Before Embroidery	5-1
5.1	Function Menu Layout Before Embroidery	5-2
5.2	EMB Call	5-3
5.3.0	I/O	5-11
5.3.1	FDD Input.....	5-12
5.3.2	USB Input	5-17
5.3.3	Serial Input	5-19
5.4.0	Setting	5-21
5.4.1	Basic Setting	5-23
5.4.2	EMB Parameter Setting.....	5-29
5.4.3	Machine Parameter Setting	5-32
5.4.4	Needle Setting (Color)	5-36
5.4.5	Frame Offset Setting	5-47
5.4.6	Options Setting	5-49
5.4.7	The Other Setting	5-59

5.5.0	Tools	5-63
5.5.1	Manual Trim	5-64
5.5.2	Frame Center	5-64
5.5.3	Hoop Select	5-65
5.5.4	Language	5-65
5.5.5	Machine	5-66
5.5.6	ZIGZAG ORIGIN	5-70
5.6.0	Ready	5-71
5.6.1	Position	5-72
5.6.2	Gauge	5-73
5.6.3	Exclude	5-74
5.6.4	Fastview.....	5-75
5.6.5	Trace	5-78
5.7.0	Design	5-79
5.7.1	Repeat	5-80
5.7.2	Edit	5-99
6.0	Function Menu During Embroidery Pause	6-1
6.1	Structure of Functions Menus	6-3
6.2	EMB Call	6-4
6.3	Setting	6-5
6.4	Float	6-6
6.5	Frame	6-7
6.5.1	Frame Feed	6-7
6.5.2	Speed Code	6-8
7.0	Troubleshooting	7-1
7.1.0	Error Messages and Handling	7-1
7.1.1	Main Shaft Motor and Others	7-1
7.1.2	X, Y Motor-related Errors	7-1
7.1.3	Color Change	7-2
7.1.4	Encoder	7-2
7.1.5	Consecutive Work	7-2
7.1.6	Floppy Diskette and Communications	7-3
7.1.7	Memory	7-4
7.1.8	USB Memory	7-5
7.2.0	Machine Setting	7-6
7.2.1	Control Box Front	7-6
7.2.2	X/Y Driver and Main Driver Switches Setting	7-7
7.2.3	Fuse Install and Replacement	7-9
7.3	System Block Diagram	7-10


1

Structure of Operation Box

1.1 Part Names and Functions

The OP Box of the small-head E-series embroidery machine, which is an LCD monitor, is displayed in <Fig. 1.1-1>. On the right side and the rear, there are a cable and a port respectively.

► Front Side

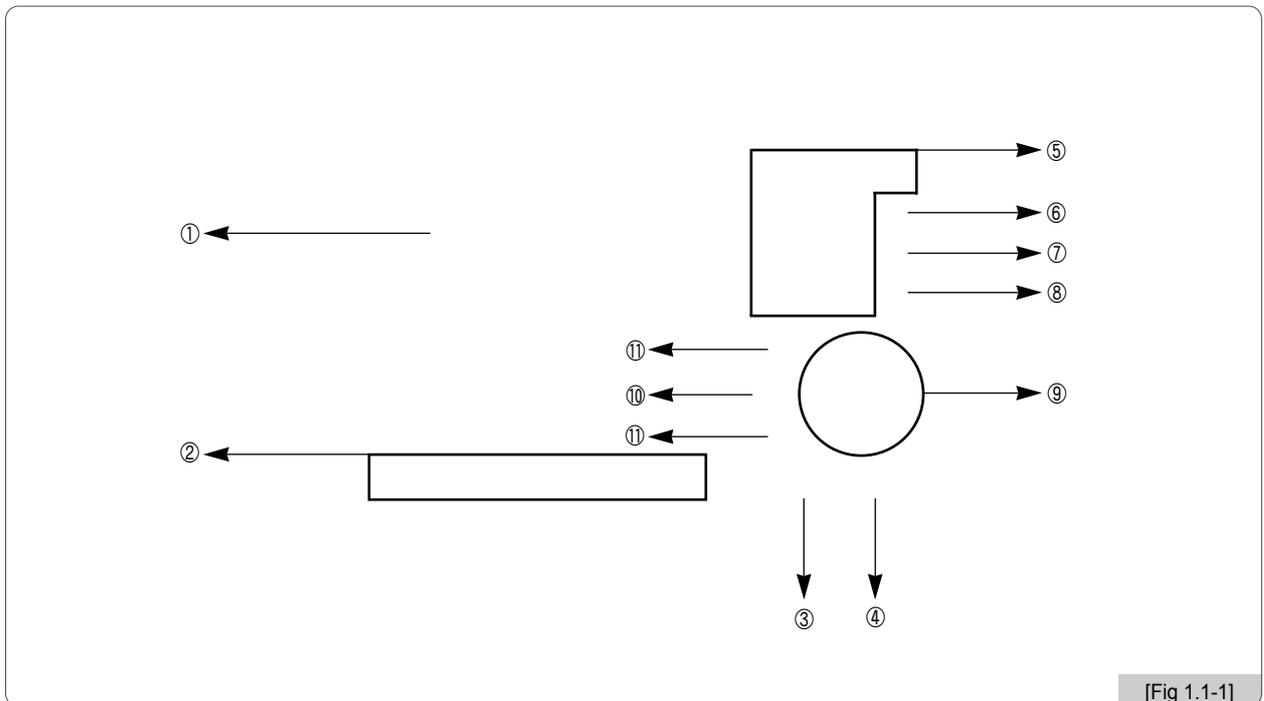

[Fig 1.1-1]

① LCD Screen

As 6.4-inch color LCD monitor, it shows all information necessary for operation.

② Function Menu Buttons

They help choose the functions on the screen.

③ Start Button

It begins embroidery work.

④ Stop Button

It stops embroidery work in progress.

⑤ Number Buttons

They are used to enter numbers upon parameter setting and to manually move the needle bar.

※ : It is used as the upper thread holding solenoid operation key.

※ : In case where the laser device is equipped, it is used to turn on/off the laser pointer.

⑥ All-head Use Menu Key

It is used to operate all heads.

⑦ ORG/ESC

It brings the needle bar to the original position or helps escape from the menu.

⑧ SET/ENT

It sets up parameters and selects the menu.

⑨ Frame Move Buttons

They are used to move the embroidery frame in four directions including left, right, up, and down and to move around the menu.


⑩ Frame Speed Button

It adjusts the embroidery frame speed from low to medium to high.

⑪ Main Shaft Speed Change Key

It is used to change the main shaft speed during embroidery work. To increase the speed, use the 'UP' key. To decrease the speed, use the 'DOWN' key.

► **Right Side**

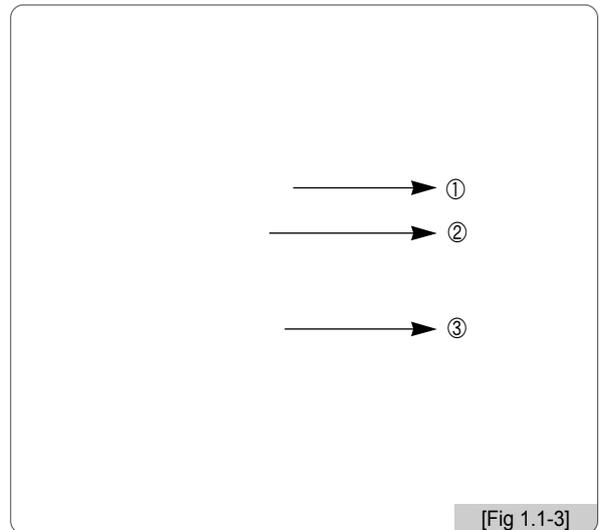

To provide protection against dusts, it is covered with the connector cover. When pressing the cover, it will open.

① USB Port (Master)

It is used to export designs from the embroidery machine or import it into the machine using the USB memory.


② USB Port (Slave)

It serves as a standby port for communications with PC using the USB memory.

③ Serial Port

It serves as a port for serial communications.

► **Back Side**

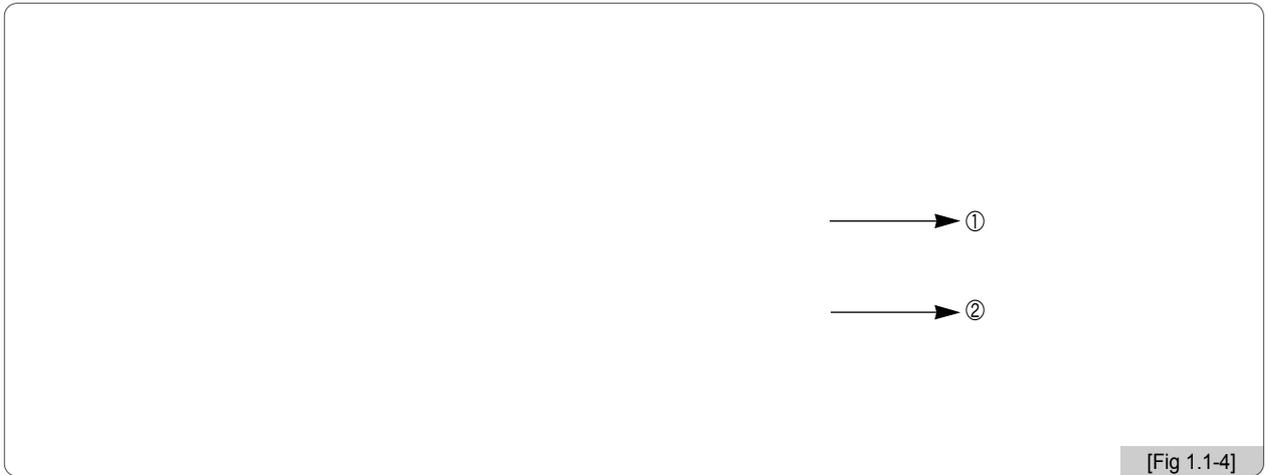

① Power and CAN Communications Cable Connection

② Connected to floppy drive cable


As the external floppy drive, it can be used after cable connection.

2

Preparation for Embroidery

2.1 Turn on the Power

※ Small-Head E-Series Automatic Embroidery Machine

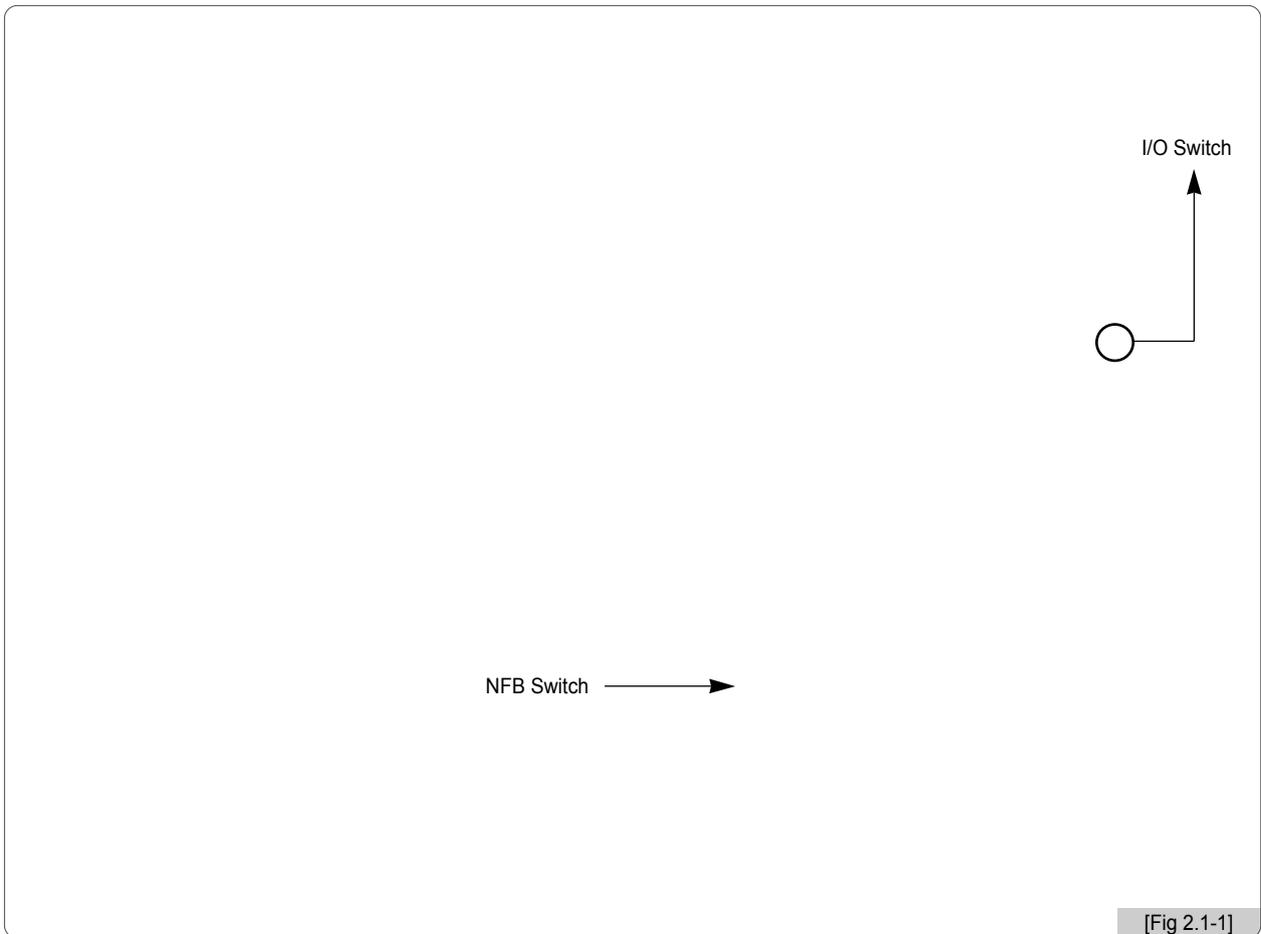


- ① Insert the power plug into the outlet.
- ② Check the NFB switch location as in <Fig. 2.1-1> and lift the NFB switch (make it 'ON').
- ③ Check the I/O switch location and press the I/O switch.
- ④ The LCD screen is on, and the embroidery operation program is displayed on the screen.
- ⑤ Use the frame move keys to check the normal operation of the frame. See '5.5.5(3) Operation Test' to check the basic operations.

[Caution]

Make sure that the power plug is pulled off before conducting A/S activities.

2.2 Basic Operation Procedure

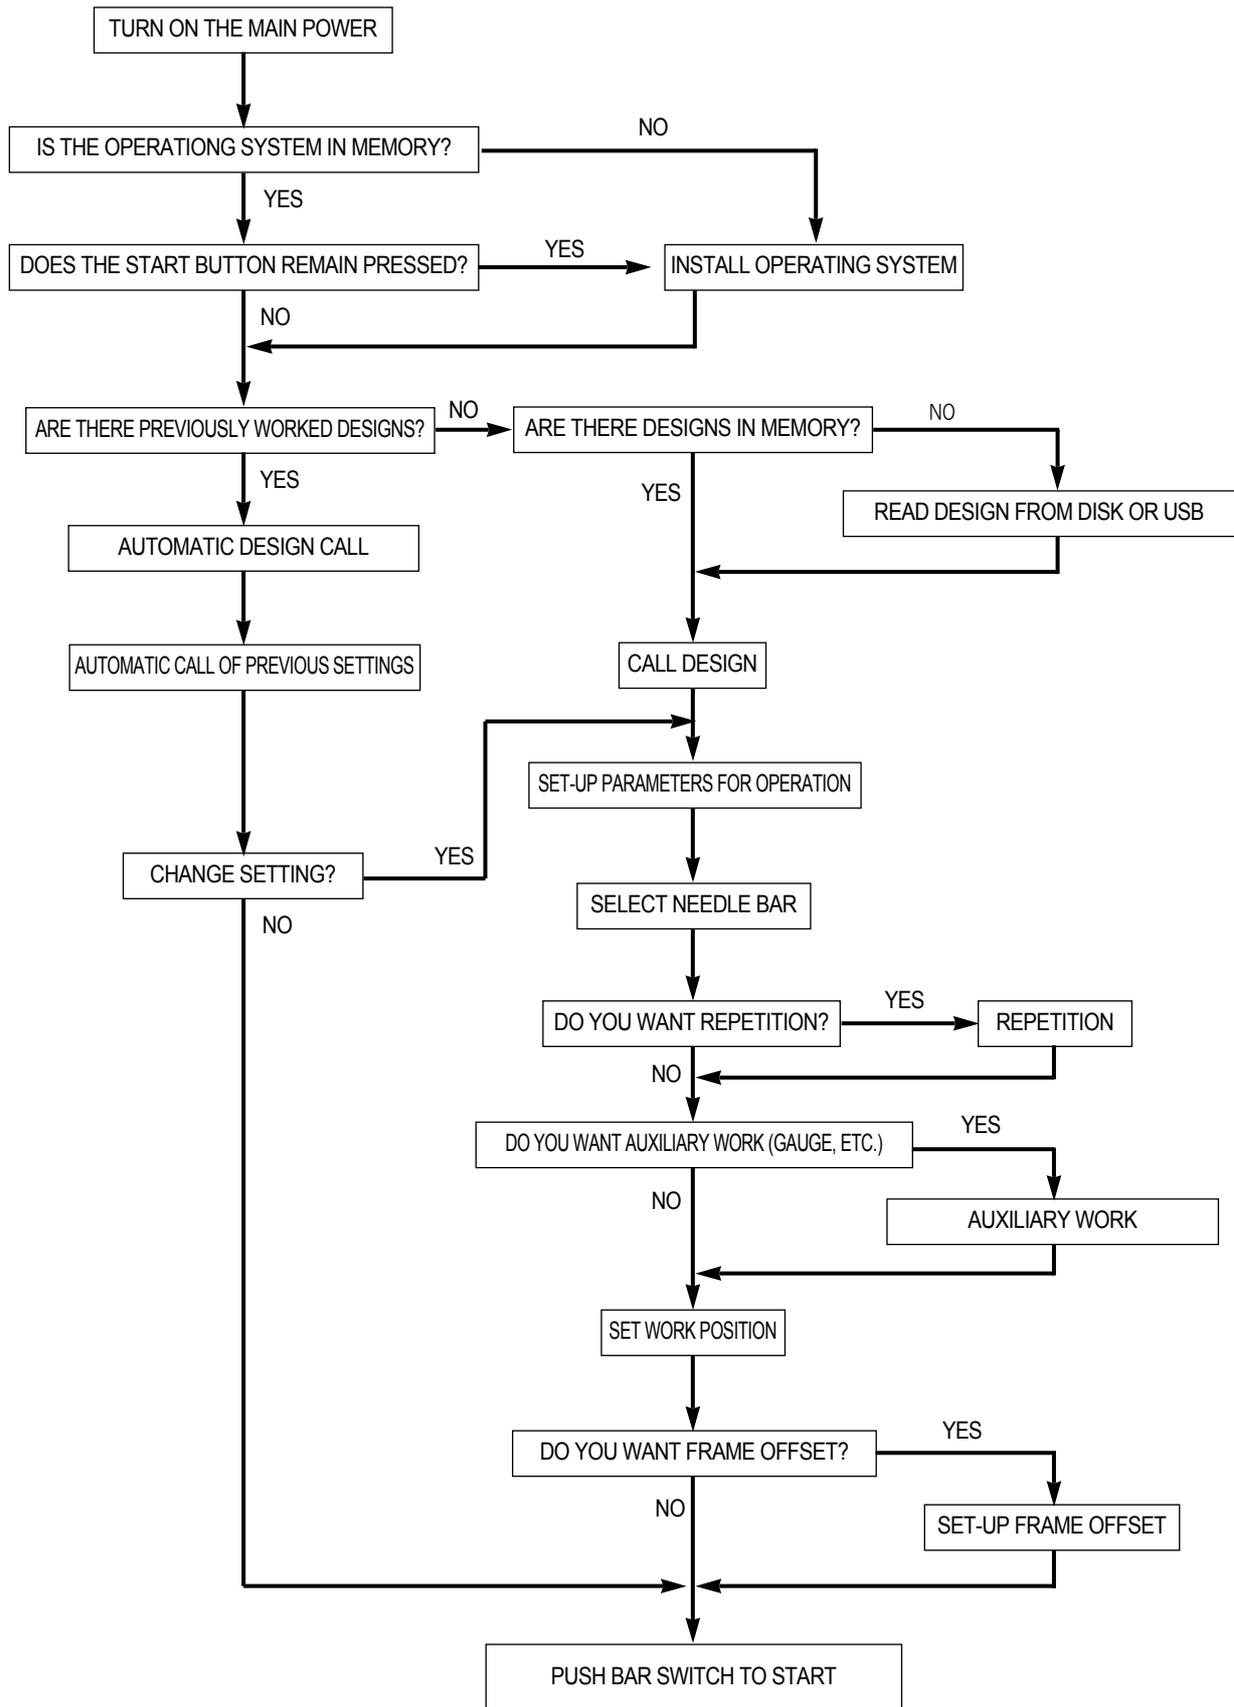

3




Operating Program Install

When the machine is shipped out from the factory, the machine is already installed with the operating program and default setups. However, if the program is defective or the set values need to be changed or upgraded, the program shall be reinstalled. In this case, we offer the functions to re-install the programs and initialize the set values.

■ How to Find SWF Install Program

1. If the machine operating program is not installed, the install menu automatically appears. <Fig. 3.0-2>
2. When the machine is booted, the logo appears for two seconds as in <Fig. 3.0-1>. Press the START button, and the install screen appears. <Fig. 3.0-3>

START Button	START Button at logo screen	Motion Description
	When the START button is pressed	It moves to the SWF Install Program.

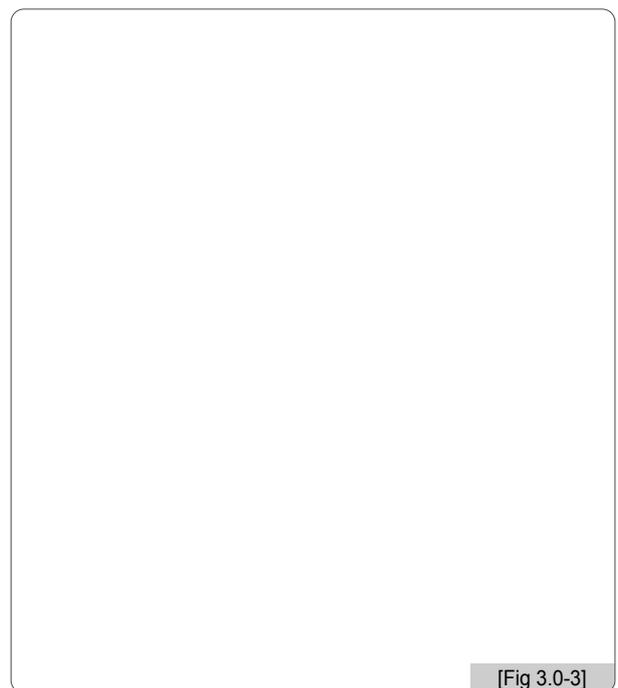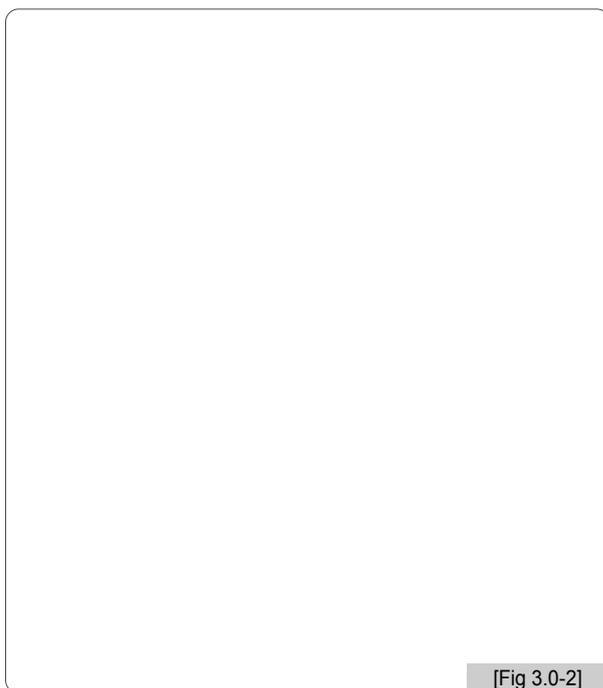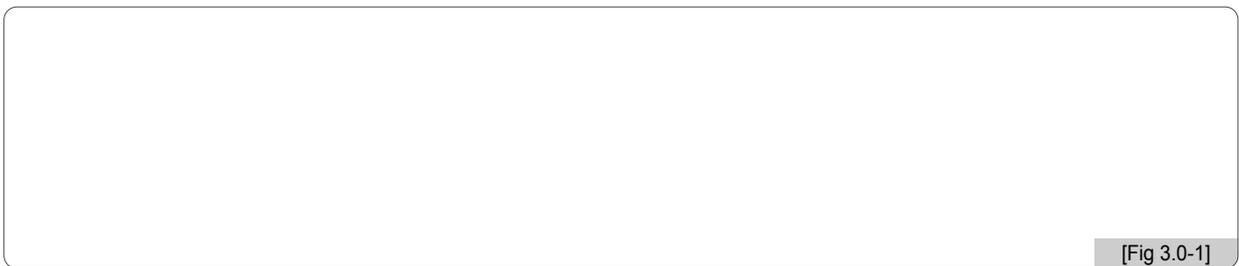

3.1.0 SWF Install Program

As in <Fig. 3.0-3>, SWF Install Program has the functions, such as install, backup, memory management, and system setting.

3.1.1 Install

This function installs the embroidery machine operating program and necessary data files to the OP Box through input devices (floppy diskette, USB).



■ How to select the install menu

1. Use the hot key (number button) to select the menu.
2. Use the direction buttons (frame move buttons) to move the cursor (red) and press the set button to select the menu.

1) Program: embroidery machine operating program

In <Fig. 3.0-3>, select _____ and <Fig. 3.1.1-1> appears on the screen.

To use a floppy diskette, insert a floppy diskette containing the operating program and select _____. To use a USB memory, insert a USB memory into the USB port and select _____. In either one of the ways, the program can be installed. If you desire to cancel, select _____.

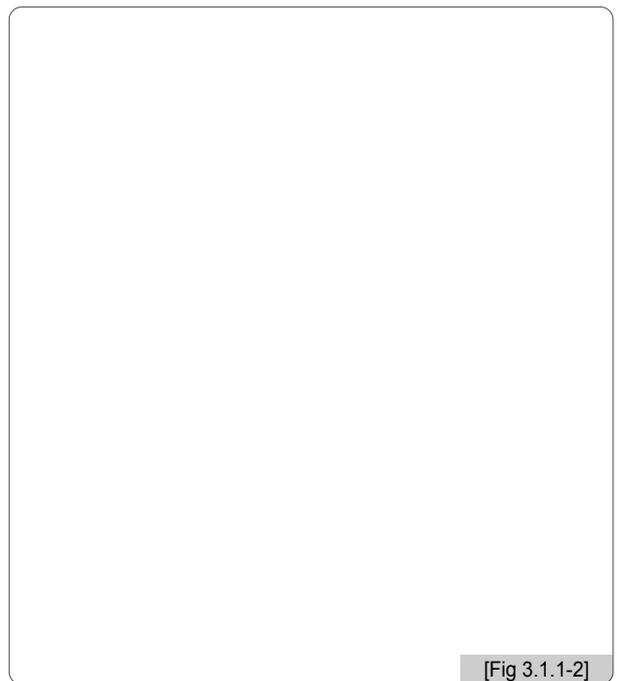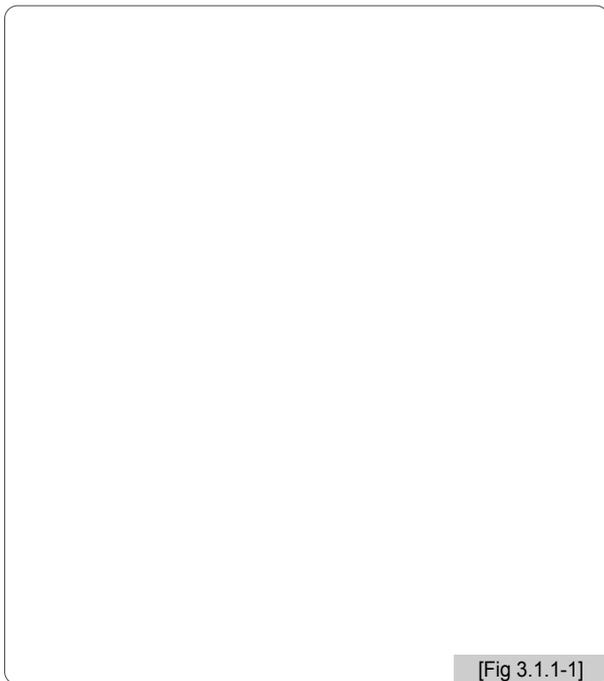

2) Data: Necessary to use the embroidery machine operating program.

In <Fig. 3.0-3>, select _____, and <Fig. 3.1.1-2> appears on the screen.


To install data by using a floppy diskette, insert the floppy diskette containing the data file and select _____. To

install data by using a USB memory, insert the USB memory into the USB Port, and select _____. If you want to

cancel the data installation, select _____.

3) Program : Machine control program

<Fig. 3.1.1-3> is automatically created when the operating program and data are installed through a floppy diskette or USB. If _____ is selected as in <Fig. 3.0-3>, <Fig. 3.1.1-3> appears as well. To upgrade the machine control program, select _____. To cancel the upgrade, select _____.





3.1.2 Back up

To the contrary to installation, backup is to save the embroidery machine operating program and data files in a floppy diskette in preparation for emergency. The backup function cannot be used, if there are no operating program or data files or if the memory is formatted.

1) Program

Select in <Fig. 3.0-3> and then <Fig. 3.1.2-1> appears.

To perform backup using a floppy diskette, insert a floppy diskette and select . To perform backup using a USB memory, connect the USB memory to the USB port and select . Select , if you desire to cancel it.

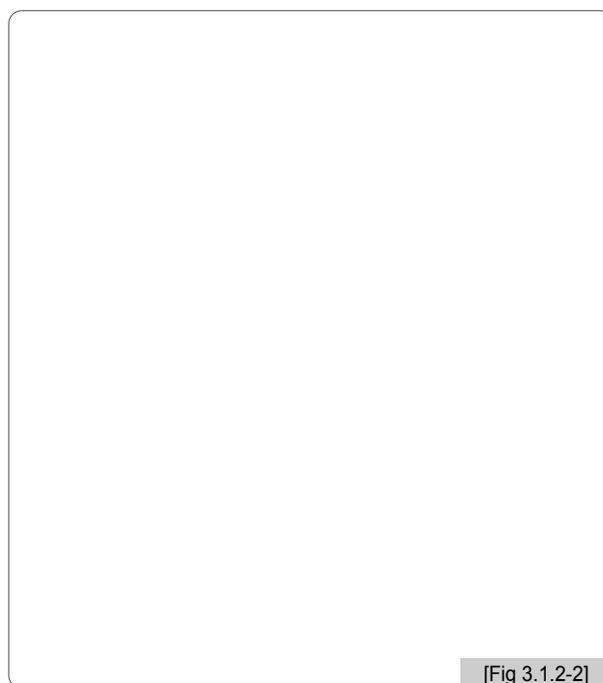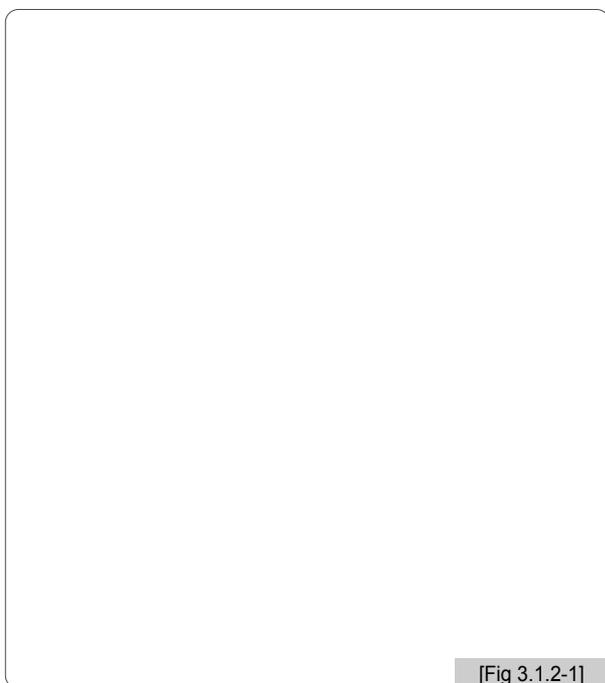

2) Data : It is necessary for embroidery operating program.

Select in <Fig. 3.0-3>, and then <Fig. 3.1.2-2> appears.

To back up data using a floppy diskette, insert an empty floppy diskette and select . To backup data using a USB memory, insert the USB memory into the port and select . If you desire to cancel it, select .

3.1.3 Memory

There are two functions regarding memory. They include memory formatting and setting initialization.

1) Formatting

In <Fig. 3.0-3>, select _____, and then <Fig. 3.1.3-1> appears.


Select _____ once, and it will format the memory, so that the program and data saved in the memory will be deleted. If you desire cancel it, select _____.

2) Program Setting Initialization

In <Fig. 3.0-3>, select _____, and then <Fig. 3.1.3-2> appears. Select _____ once, and it will initialize all settings made by the operating program. If you desire to cancel it, select _____.

3) Machine Setting Initialization

In <Fig. 3.0-3>, select _____ and then <Fig. 3.1.3-3> appears. Select _____ and it initializes the machine setting and the screen for making a new machine setting appears. If you desire to cancel it, select _____. (See <Fig. 3.2-1>.)

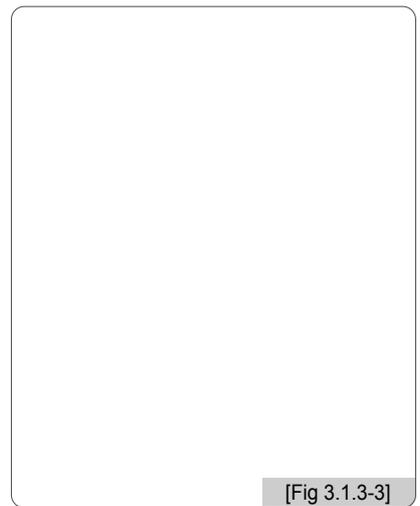



3.1.4 System

The system supports the function of entering the Lock key.

The embroidery machine operating program has the lock function. If the lock function is enabled, the operating program can be used for a certain time. But after the time passes, it will take more time to start the program, thereby causing inconvenience.

If the lock function is enabled, <Fig. 3.1.4-1> will appear instead of <Fig. 3.0-1>. The program can be used for ten days without any problems, and the logo screen will stay for two seconds and disappear. However, after ten days, the program activation takes more time, causing inconvenience. After performing a round of embroidery works, more time delay will occur.

To solve the problem, new lock keys shall be received from Agent and enter it to the machine. If not, time delay will become longer over time, causing more severe inconvenience.

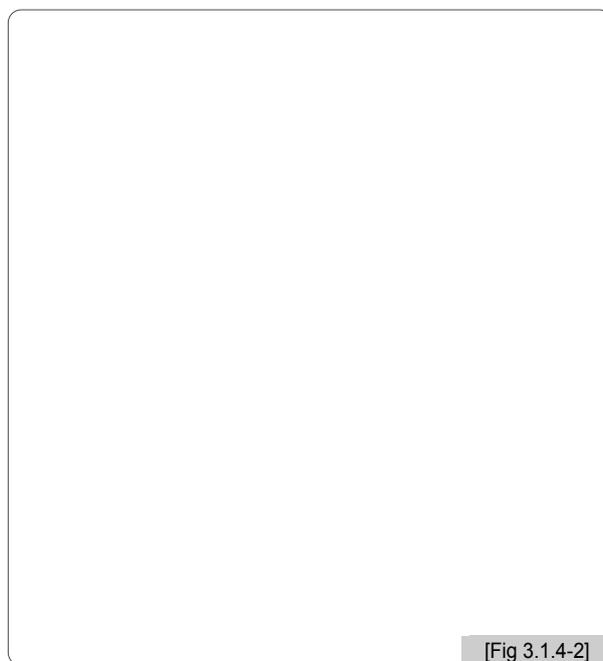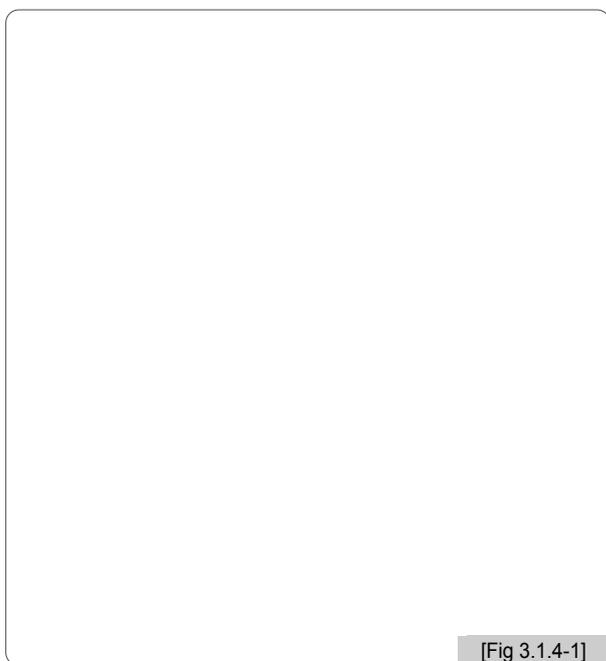

[Caution]

There are two types of lock keys: with designated number of days for use and indefinite use. For the lock key, please consult with the sales agent.

 **[Exercise] Re-entry of lock key**

- ① Press the START button as in <Fig. 3.1.4-2>.
<Fig. 3.0-3> will appear.
- ② Press as in <Fig. 3.0-3>. <Fig. 3.1.4-3> will appear.
- ③ Call the selling agency to give the old code information (ex: 0 1 2 9 4 6 1 0) appearing on the screen.
Then the selling agency will provide the new lock code.
- ④ Enter the new lock code by using the number buttons.
- ⑤ Press the direction buttons to select OK and then press .

3.2.0 Machine Setting Change

This function is to create the basic embroidery machine specifications and make the mechanical settings.


<Fig. 3.2.0-1> appears under the following conditions:

1. After memory formatting is conducted and the system is newly installed; or
2. After initialization is conducted using the SWF install program (See 3.1.3 Memory).


The moving around on the menu can be done using the direction keys. Press to choose, and press to cancel.

In case of 1 or 2 above, when the main power switch is on, the first screen appearing is <Fig. 3.2.0-1>. Ten parameters can be set in <Fig. 3.2.0-1>. As in <Fig. 3.2.0-1>, 10 parameters can be set. Select “Setting” and the screen, where encoder signal, potentiometer, and sensor can be set, appears.

Select the buttons on the right side in <Fig. 3.2.0-1> to make each setting.

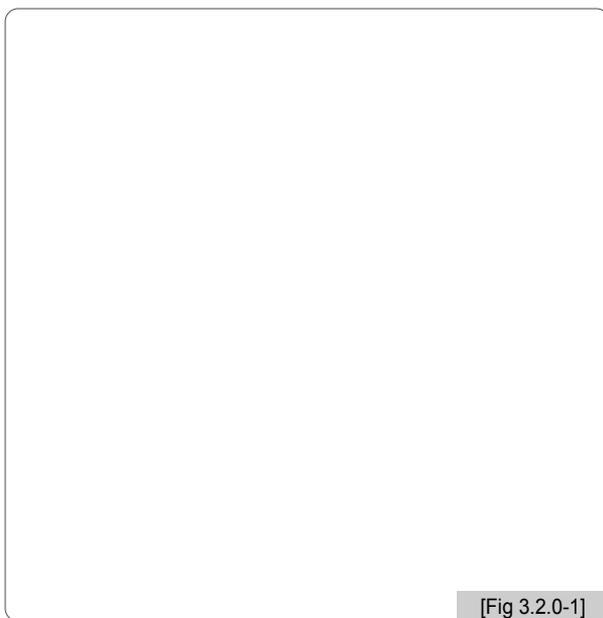

[Fig 3.2.0-1]

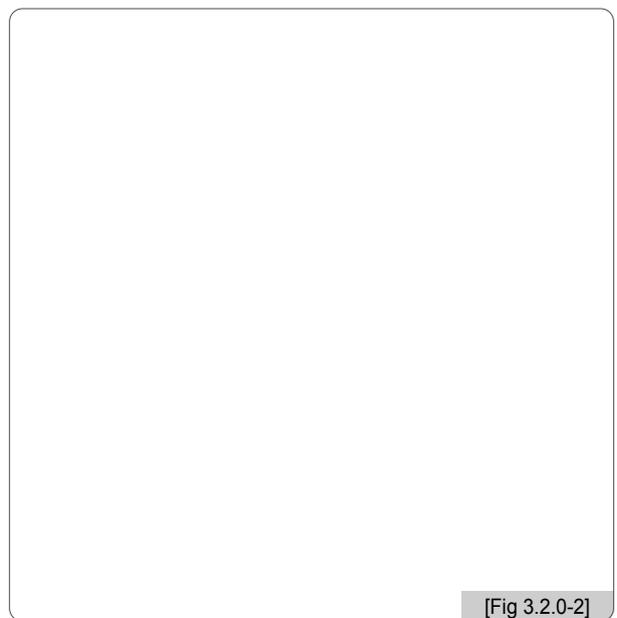

[Fig 3.2.0-2]

After setting each item, press for application. When completed, press OK in <Fig. 3.2.0-1> and when is pressed, the screen for setting check appears as in <Fig. 3.2.0-2>. If correction is desired, choose “PREV” and press . If the setting is correct, press OK and then press .

3.2.1 Specifications Setting

Ten specifications for embroidery machine can be set.

① HEAD Setting



② Color Number Setting




③ Trimming Method Setting




④ Y-Frame Size Setting




⑤ X-frame Size Setting

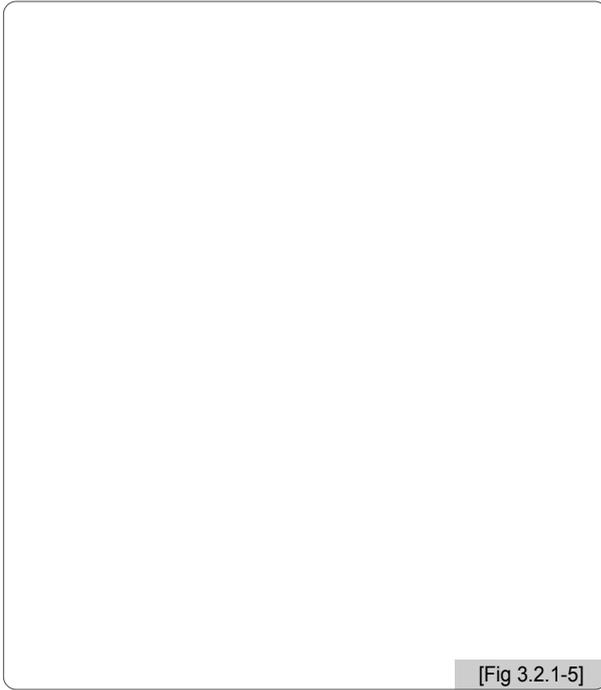


⑥ X-space Extension Setting

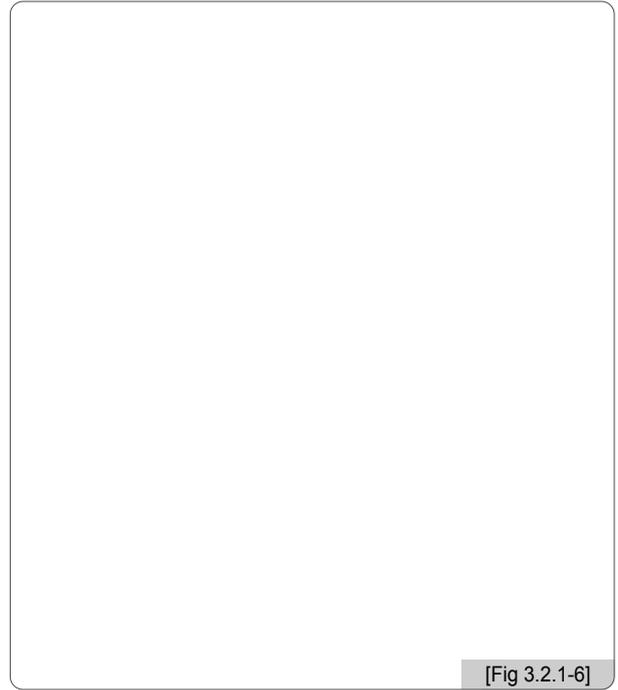


⑦ Wheel Type Setting




⑧ Sequin Type Setting

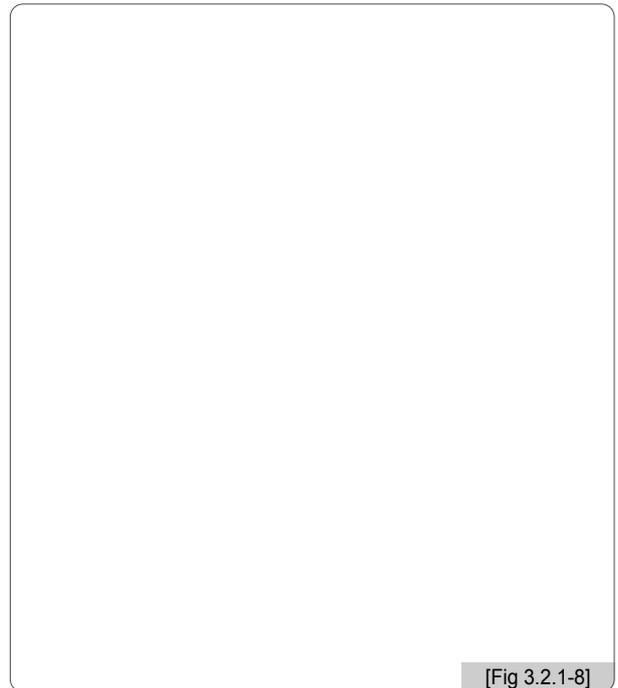

⑨ X Satin Default Setting

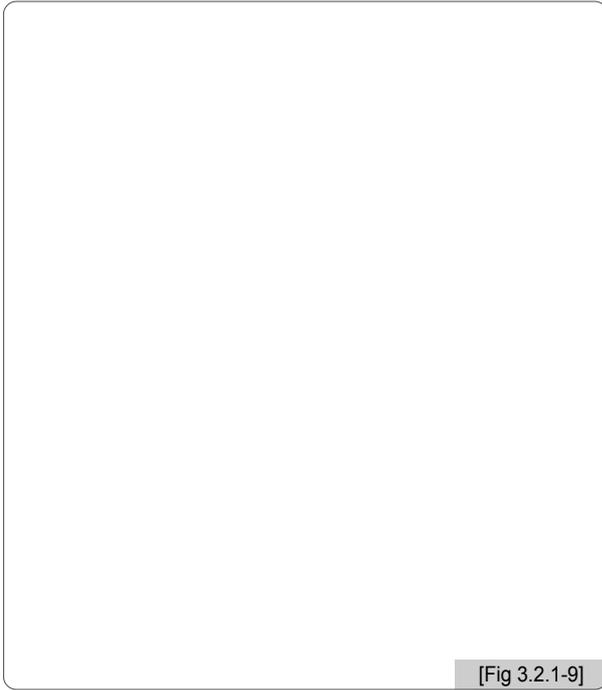

⑩ Y Satin Default Setting

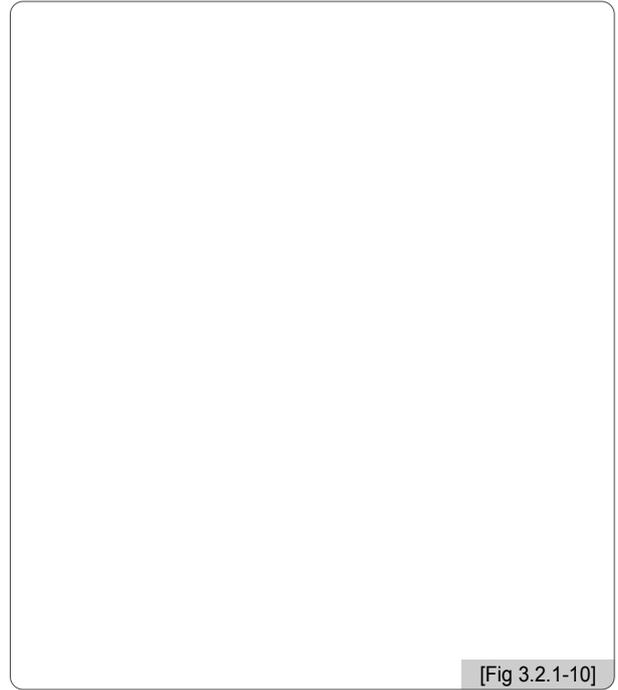

3.2.2 Machine and Signal Setting

Select "Setting" on the menu in <Fig. 3.2.0-1> and press . <Fig. 3.2.2-1> will appear on the screen.

1) Main Shaft Encoder Signal Setting

Press "Select" and set it at 100 degrees. Adjust the encoder until a beep sound is heard and "On" appears on the screen. Press "Select" again to complete the setting.

2) Needle Bar Position Setting


Press "Select" and move it to the highest number needle bar (ex: 9 color → No.9). Adjust the potentiometer until a beep sound is heard and then "On" appears on the screen. Press "Select" to complete the setting.

3) X, Y Limit Setting

Press "Select" and manually move the X,Y frames. Check On/Off of the sensors and press "Select" to complete the setting.

4) Wiper Signal Setting

Press "Select" and manually move the wiper. Check the conditions of the sensors with a beep sound and press "Select" to complete the setting.




[Warning]

If setting is incorrect, it may cause abnormality to the machine. Unless the information is accurate, do not change the setting.

4

Screen Layout of Operating Program

<Fig. 4.0-1> is the initial screen of the operating program. The screen is mainly divided into (1) embroidery screen, (2) work information, and (3) main function buttons.

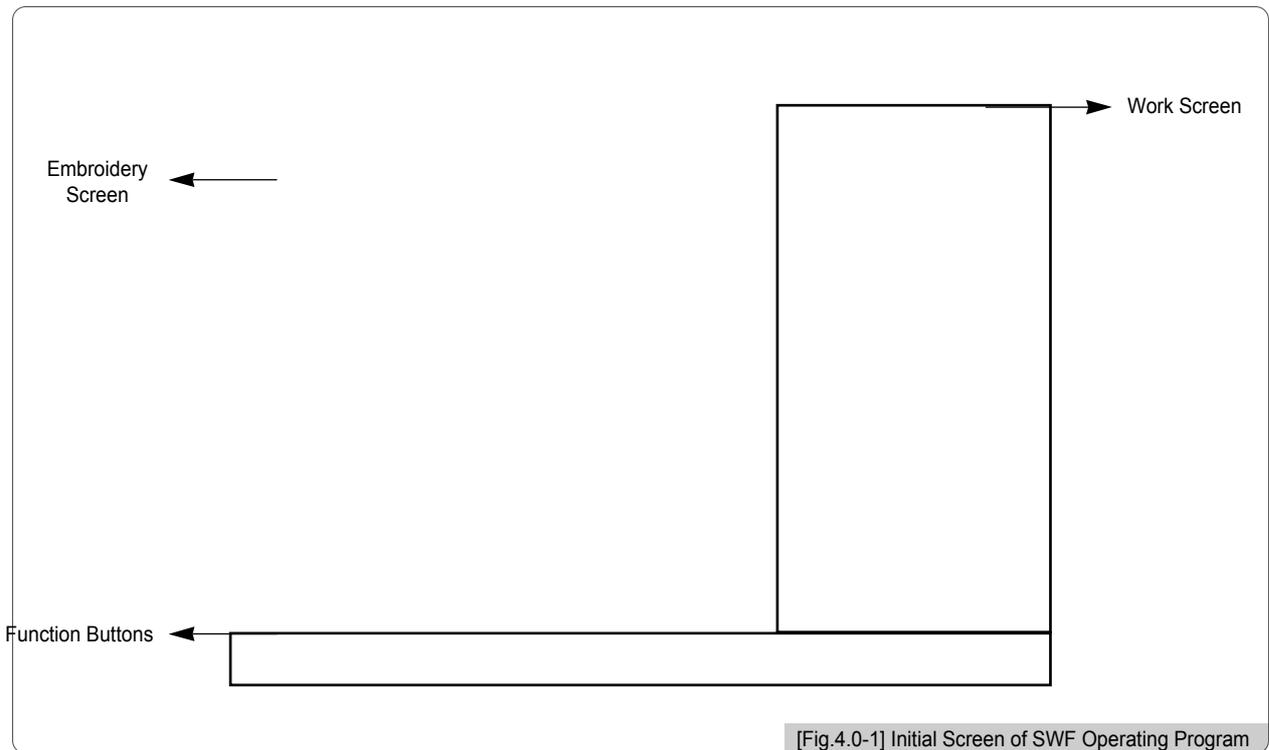

4.1 Embroidery Screen

This shows the embroidery design called. If the operating program is installed or no design is called, the SWF logo is displayed.


4.2 Work Information Screen

This shows all information relevant to the design currently called.


Subject	Description	Remarks
	<ul style="list-style-type: none"> - # : Design name / memory # - ST. : Total # of stitches made for the design chosen 	
	<ul style="list-style-type: none"> - X, Y lengths from the design starting position (central line) - X, Y lengths of the design chosen (Unit: mm) 	
	<ul style="list-style-type: none"> - # of colors for the design chosen 	
	<ul style="list-style-type: none"> - # of jumps for the design chosen 	
	<ul style="list-style-type: none"> - P : Reverse effects (X, Y, XY reverse) - 0 ANG : Rotation degree by angle of the design chosen - X 100% : X enlargement value - Y 100% : Y enlargement value 	
	<ul style="list-style-type: none"> - Current needle bar / Next needle bar 	
	<ul style="list-style-type: none"> - Frame move speed: Low / Mid / High 	
	<ul style="list-style-type: none"> - Frame has returned to the origin. ※ According to 5.4.2 Parameter Setting, when the function is enabled, the icon is green. When it is disabled, it is gray. 	
	<ul style="list-style-type: none"> - Shows the stop position of the main shaft. During embroidery work or if it is not 100 degree, the icon is gray. ※ <Warning> When changing the needle bar, the degree shall be 100. 	
	<ul style="list-style-type: none"> - Displays the embroidery work time (HH/MM) 	
	<ul style="list-style-type: none"> - ST : accumulative # of stitches so far - WK : total # of works finished. 	
	<ul style="list-style-type: none"> - X : current X-axis position - Y : current Y-axis position 	
	<ul style="list-style-type: none"> - ST : # of stitches progressed - % : Progress rate 	
	<ul style="list-style-type: none"> - Set embroidery speed - Current embroidery speed 	

4.3 Function Menu

There are six function menus related to embroidery work. When each menu button is pressed, the sub-menu appears. According to the operation of the embroidery machine, there are two types of menus: “Function menu before embroidery” as in <Fig. 4.3-1> and “Function menu during embroidery” as in <Fig. 4.3-2>. For more information, see the below.

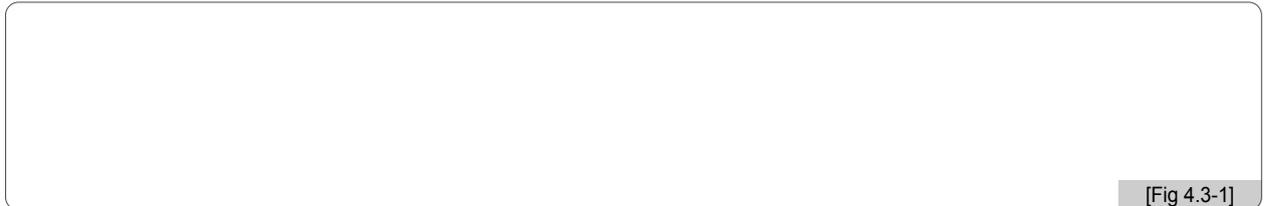

[Fig 4.3-1]

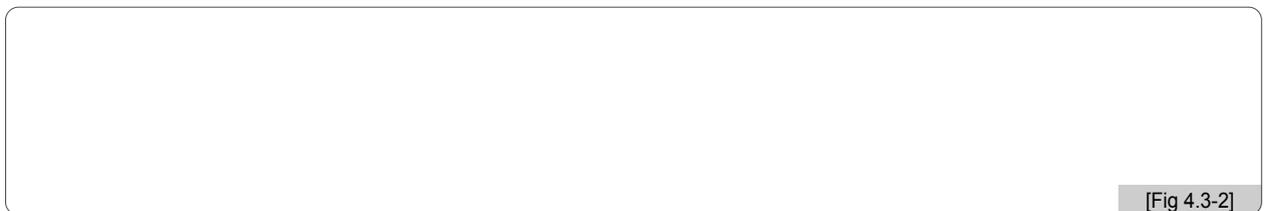

[Fig 4.3-2]

■ Frequently used buttons on the menu

Menu Move Buttons : Move the cursor on the menu to make a selection.

ESC/PRE : Ends the execution command.

Closes the window where the command is executed.


Cancels the command.

SET : Checks or executes the command.

Function keys : Buttons for function choice. Functions matching each function key are different depending on screen.

4.4.0 Work Progress Messages and Clock Screen

At the bottom part of <Fig. 4.4.0-1>, there is a section displaying messages. On the upper right side, there is a window displaying a clock. The message display window shows the status of work progress. The clock window shows the current time.

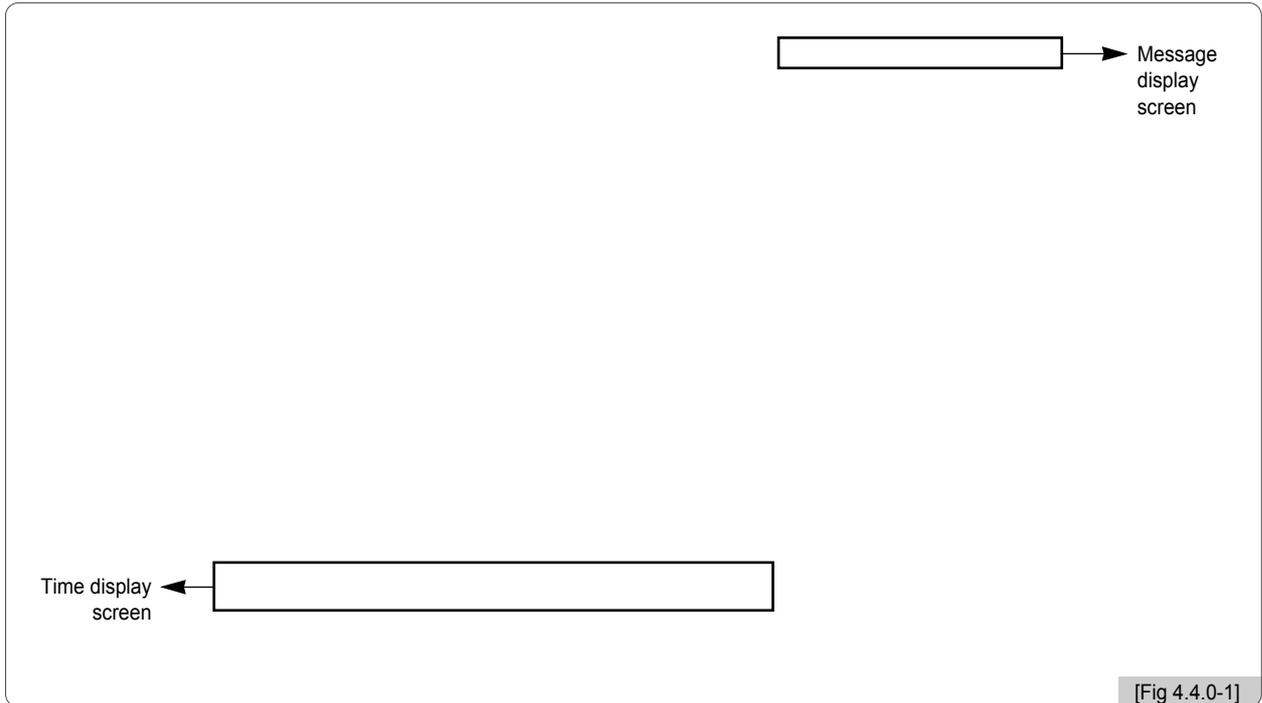

4.4.1 Work Progress Messages

Messages	Event
"Stop by stop switch"	The machine is stopped by pressing the stop switch.
"Stop due to the upper thread break"	The machine is stopped after the thread break is detected.
"Stop due to color code and stop code"	The machine is stopped due to the stop code.
"Stop due to the beyond-frame limit movement"	The frame moved beyond the movement limit.
"Design close"	The embroidery is finished.
"Stop due to back stitch"	The machine is stopped after back stitch.
"Frame in motion"	The frame is moving.
"Stop during frame feed!"	The frame is stopped while feeding.
"Stop at offset position!"	The machine is stopped at the offset point.
"Needle bar replace"	The needle bar is replaced.
"Selection of non-stitching operation feed unit"	During non-stitching operation
"Start switch → Machine in operation"	Testing is conducted in the test mode.
"Loading embroidery data!"	Embroidery design is called.

4.4.2 Date and Time Change

To change time and date displayed on the upper right side of the screen, select **[Date/Time]** and then select the date/time setting menu under other settings.

When the menu is chosen, time and date can be set as in <Fig. 4.4.2-1>.



Use **[Left]** to move to the date and time menu. Use **[Up/Down]** buttons to increase or decrease the numbers. When the setting is completed, press **[Enter]** for application. Press **[Esc]** to cancel the setting.

[Note]

If the lock function is set, the date and time setting is impossible.


5

Function Menu Before Embroidery

Before starting the embroidery work, various settings shall be made. In particular, if the operating program is installed first, various parameters shall be set from the design call. Of course, there is no problem in conducting embroidery based on the basic setting. To learn more about diverse functions and to produce better-quality embroidery, it is better to know the functions.

The most basic way to use the function menu buttons is to press **[F1]** ~ **[F6]** on the OP Box.

5.1 Function Menu Layout Before Embroidery


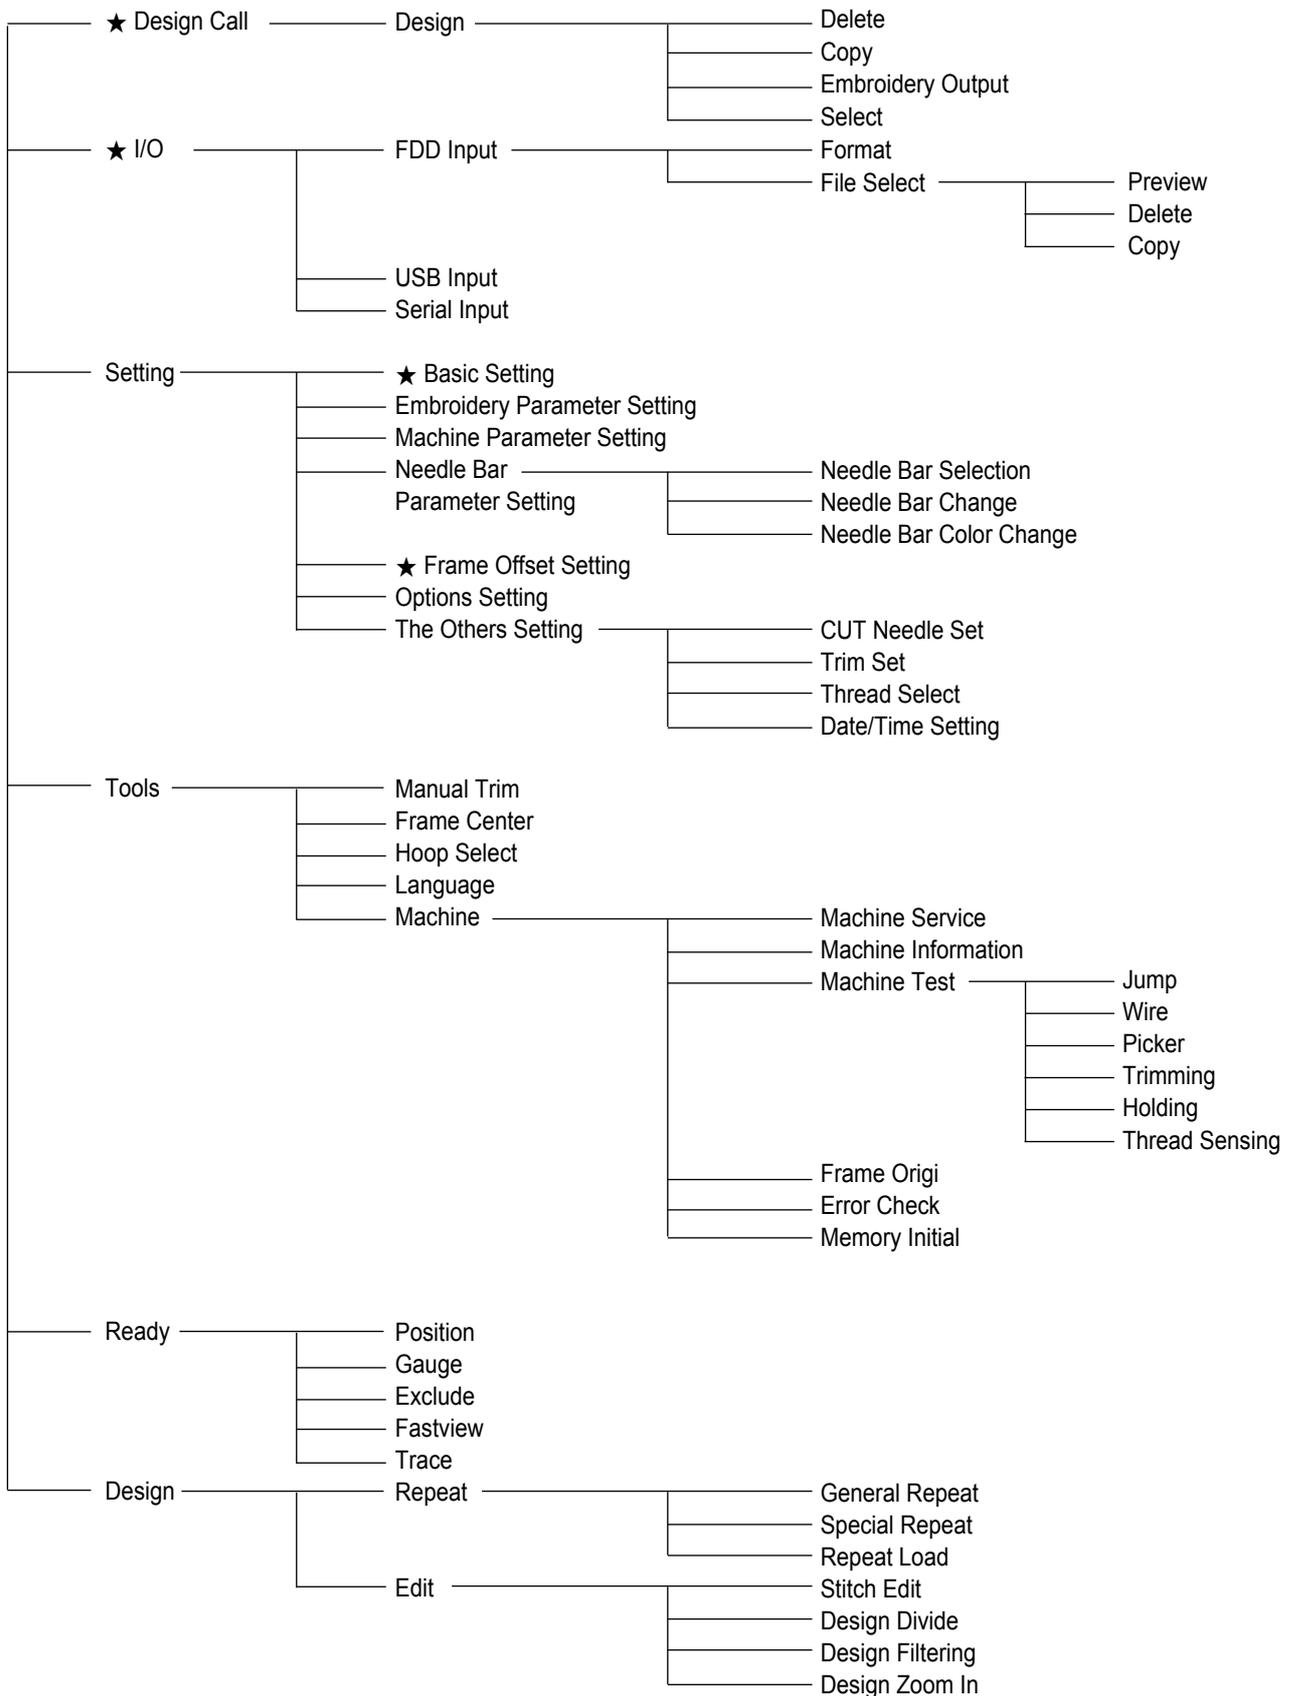


※ [Caution] : The menus marked with '★' on the main menu cannot be used when consecutive work is set.

5.2 EMB Call

- This function is to call back the embroidery designs saved in the memory. The function can be used to copy and delete designs or export them to the external devices.

<Fig. 5.2-1> is the screen where no designs are stored in the memory or there is no design called out. If there is a design called out previously, the previous work's design is displayed as in <Fig. 5.2-2>.

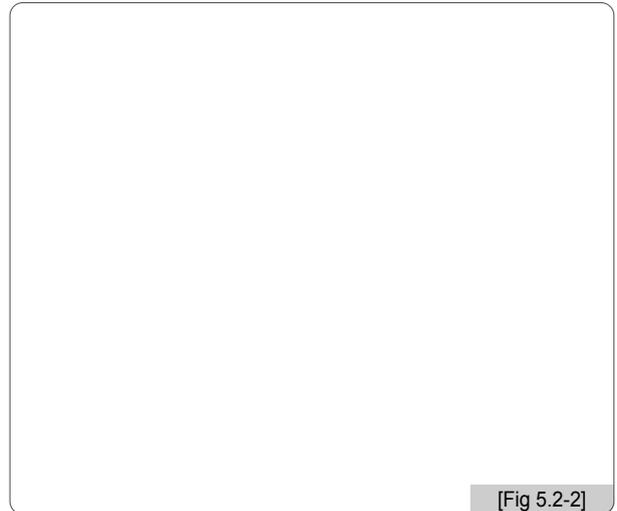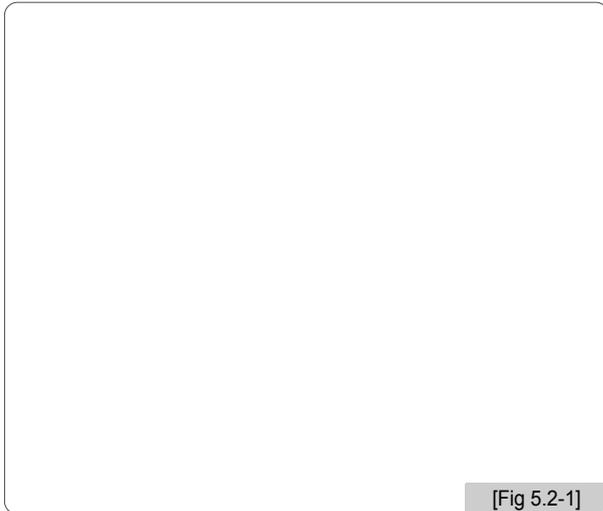


If there are no designs called as in <Fig. 5.2-1>, several function buttons cannot be used. The buttons whose letters are pale cannot be used until the designs are called later.

If [] is pressed on the screen as in <Fig. 5.2-2>, embroidery designs stored in the memory appear as in <Fig. 5.2-3>. Up to 100 designs can be stored in the memory. Up to 20 designs can be displayed on one screen. Let's get to know more about embroidery design call through [Exercise 5.2-1].

[Exercise 5.2-1] Call out the design from #35 Room.

1 Press


When the design call button is pressed, the designs stored at each room are displayed as in <Fig. 5.2-3>. The screen displays the room numbers and embroidery designs. Each screen shows up to 20 designs. The design we would like to call out is located at the #35 room, so we have to move to the next screen.

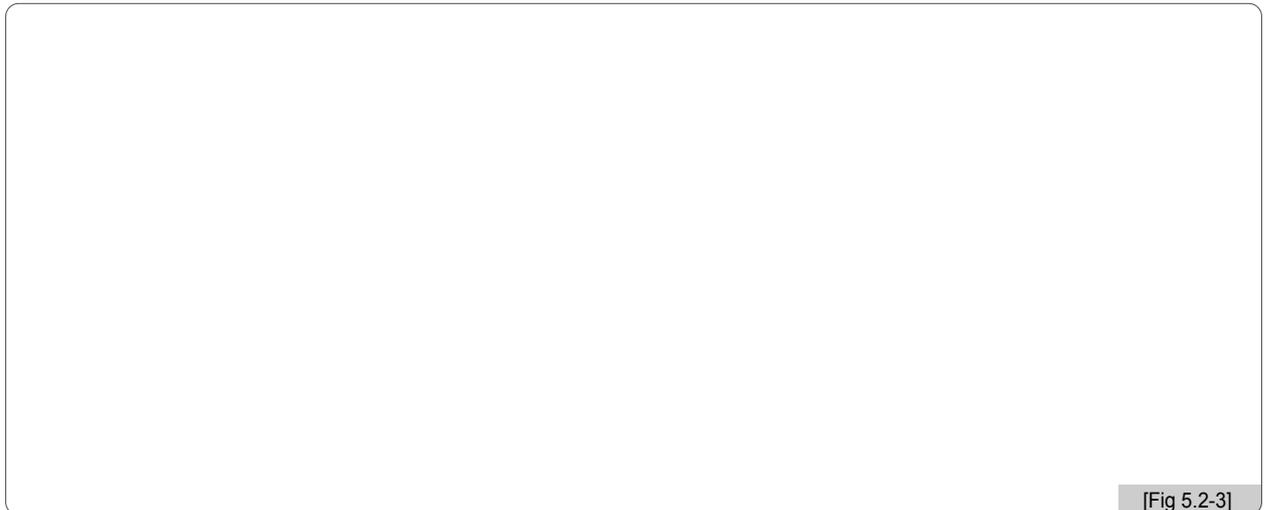

[Fig 5.2-3]

2 Use the Menu Move buttons to move to the screen where #35 room is displayed.

As in <Fig. 5.2-4> below, 20 designs are displayed.

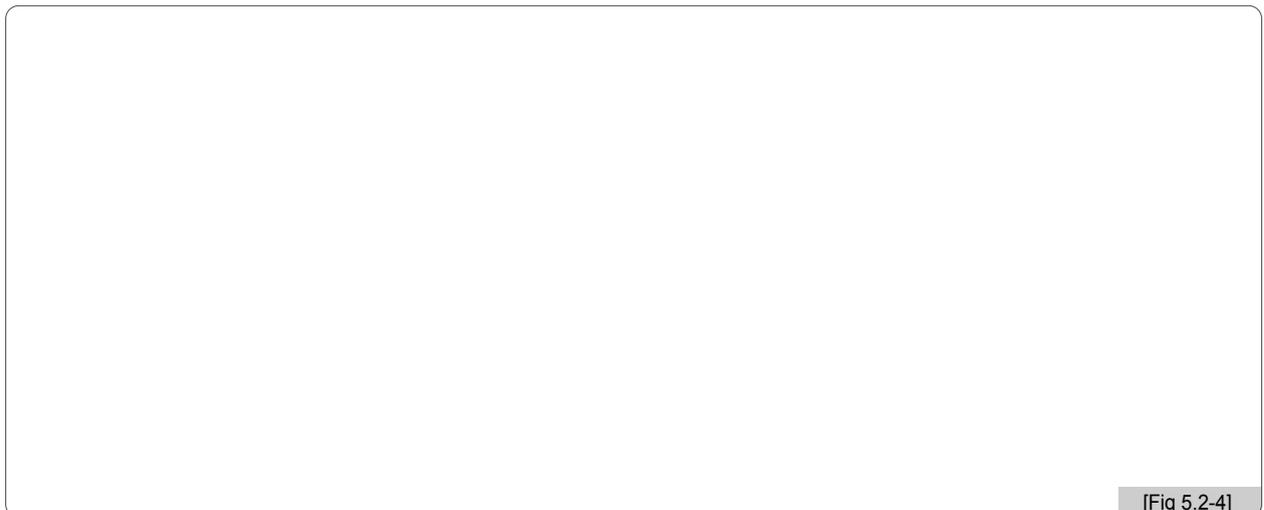

[Fig 5.2-4]

[Note]

The number of stitches unused indicates the memory space currently unused.

[Note]

is the button for refreshing the screen. Sometimes, when embroidery design is called, it is displayed all in black and white instead of in colors. In this case, go to setting - needle bar setting - color setting, and press . Come back to the design call screen and press . Then the screen will be displayed in colors.

③ Go to # 35 room in <Fig. 5.2-4> and press .(the square room with slashes)


Then a new window appears as in <Fig. 5.2-5>. On the left-hand side, the chosen design is displayed.

On the right-hand side of the screen, the information on the design is displayed. On the screen, such buttons as
, , , are enabled.



④ Press .

The selected embroidery design will be called out and displayed on the initial screen as in <Fig. 5.2-6>.



[Note]

On the embroidery information section, "OPTION NORMAL" might be seen. "Normal" refers to common embroidery data. Sometimes, "Sequin" might be displayed. It means that it is the embroidery design including the sequin code.


[Exercise 5.2-2] Copy the design from #35 Room to #69 Room.

① Repeat ① ~ ③ of [Exercise 5.2-1] “Call out the design from #35 Room”.


② Press  in <Fig. 5.2-5>.

As in <Fig. 5.2-7>, message windows will appear, and the empty room numbers and the up/down, copy, and cancel buttons are displayed. Empty rooms are the space where new embroidery data can be saved. It is possible to move to the target room number by using the direction buttons on the right-hand side.

③ Use  to move to #69 Room and press .

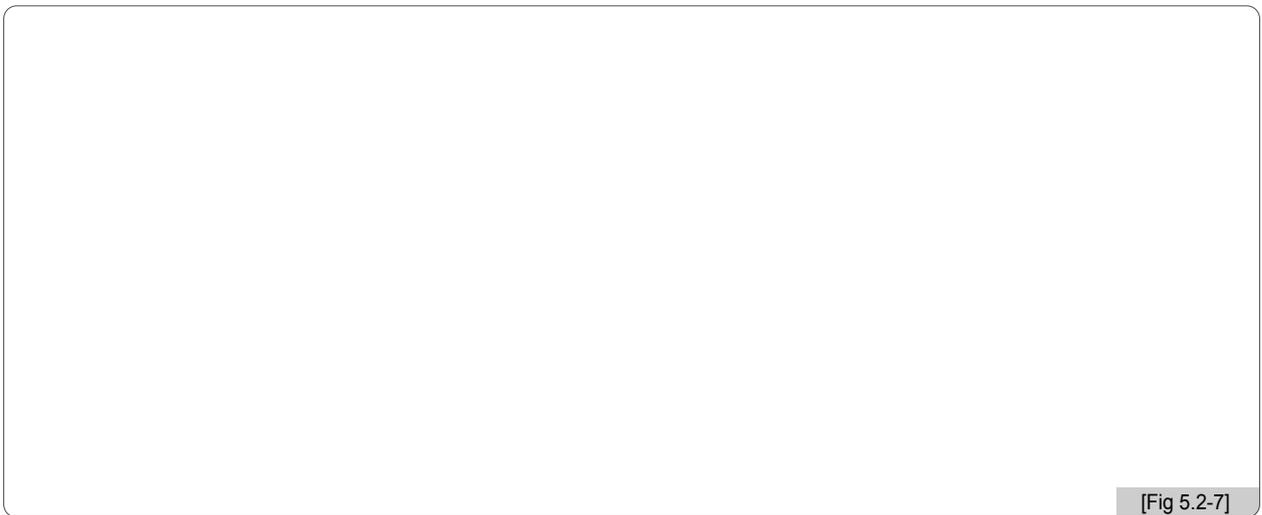

④ The embroidery data in #35 Room was copied in #69 Room. As in <Fig. 5.2-8>, the design was moved to #69 Room.

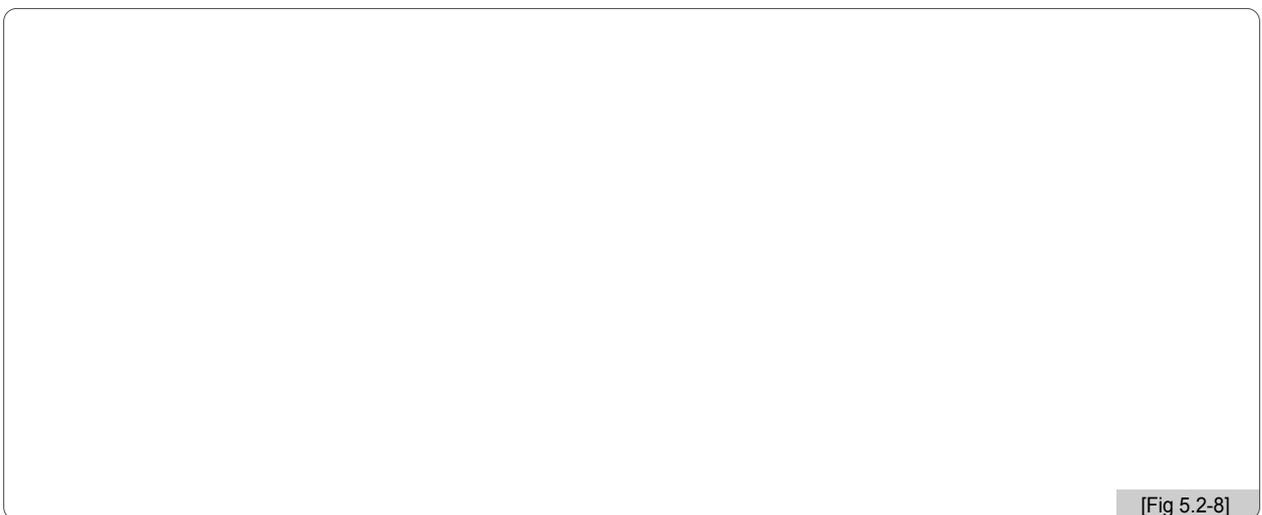

[Note]

If it is desired to cancel the copy, press  or .




[Exercise 5.2-3] Delete the design in #69 Room.

① Repeat ①~③ of [Exercise 5.2-1] “Call out the design from #35 Room”.

② Use the menu move buttons to go to #69 Room and press .


③ Press in <Fig. 5.2-5>.

As in <Fig. 5.2-9>, the message window appears asking “Do you want to delete the design data?”

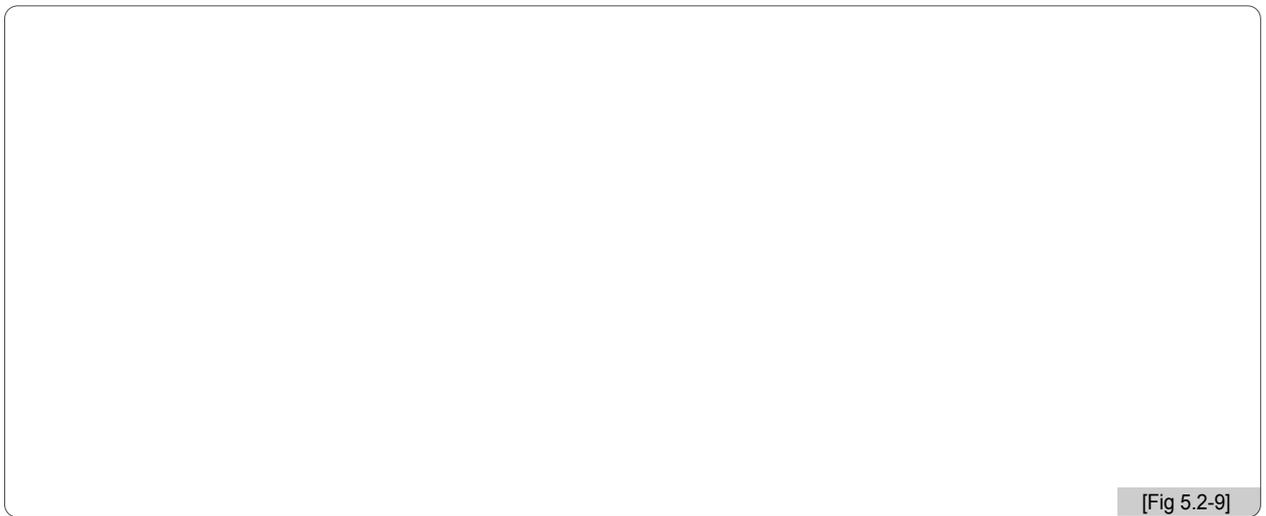

④ Press .

When compared with <Fig. 5.2-8>, the design in #69 Room was deleted as in <Fig. 5.2-10>. #69 Room becomes available for design storage.

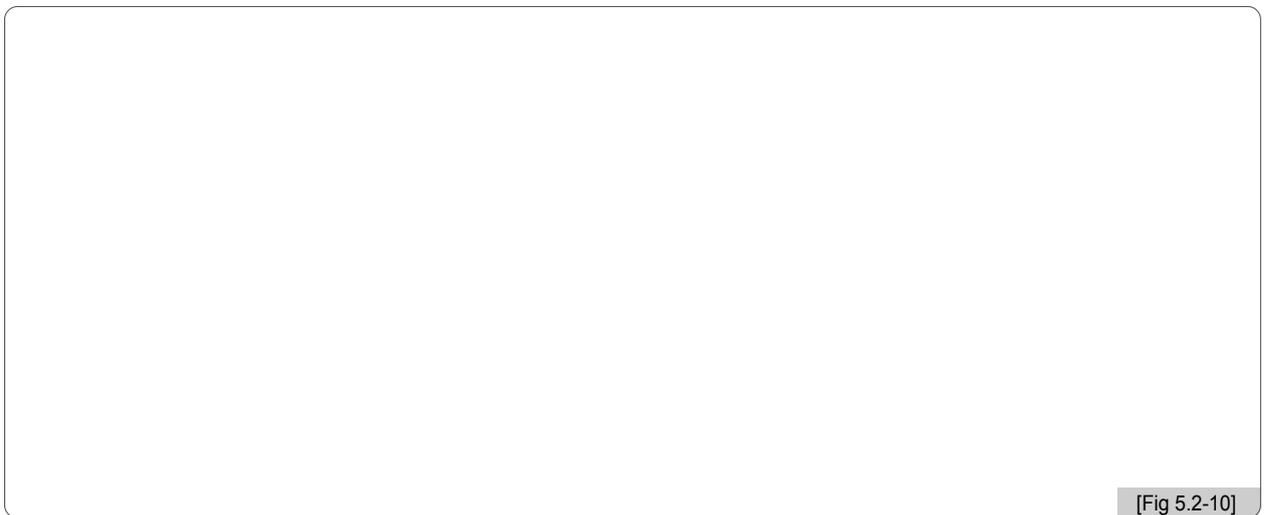

[Note]

If you do not want to delete it, press or .

 **[Exercise 5.2-4] Copy the design in #35 Room using floppy diskette or USB.**

- ① Repeat ①~③ of [Exercise 5.2-1] “Call out the design from #35 Room” .
- ② Insert a floppy diskette into the floppy drive or a USB memory into the USB port.

[Caution]


If a floppy diskette is removed from the disk drive while being used, the data in the diskette might be deleted or the diskette itself can be damaged.

- ③ Press in <Fig. 5.2-5>.

As in <Fig. 5.2-11>, the message window appears asking for selecting the output device. If is pressed, the design will be saved in the floppy diskette. If is pressed, the design will be saved in the USB memory.

④ Press or .


The message asking for the saving method appears as in <Fig. 5.2-12>. If is pressed, it is saved in the floppy diskette in the SWF method. If is pressed, it is saved in the Tajima method.




⑤ Press .

Green color of <Figure 5.2-13> indicates progress.

Green color is filled with after copying then the color will change into the original color.



<Fig. 5.2-14> shows the status of the floppy diskette where the design was copied. To check the status, see 5.3.0) Input - "Floppy". When saving designs in a floppy diskette, the file is saved as SWF000.SST. The files copied to a floppy diskette are given names such as SWF000.SST, SWF001.SST, etc. or SWF000.DST, SWF001.DST, etc.




[Fig 5.2-14]

5.3.0 I/O

- The I/O function is to enter designs from external devices to the OP Box. The designs can be copied from such external devices as a floppy diskette, USB memory, CF (Compact Flash) card, and serial communications.

On the initial screen, press and the sub-menu appears as in <Fig. 5.3.0-1>. The sub-menu buttons include Floppy Diskette, USB, CF Card, and Serial.




[Fig 5.3.0-1]

5.3.1 FDD Input

When the Floppy Diskette button is pressed, the brief information on the designs saved in the floppy diskette is displayed. Diskette formatting, design preview, design input, and design deletion can be performed.

Insert the floppy diskette containing embroidery design files into FDD.

Select “Floppy” in <Fig. 5.3.0-1>, and <Fig. 5.3.1-1> appears on the screen.



[Caution]

If a floppy diskette is removed from the disk drive while being used, the data in the diskette might be deleted or the diskette itself can be damaged.


Up to 10 designs can be displayed on one screen. If the total number of designs saved is over 10, scroll bar and scroll up/down buttons can be used to see next screens. Such information as file name, # of stitches, and creation date is displayed for each design. As in <Fig. 5.3.1-1>, use the menu move buttons and select #63 Room and press . Then <Fig. 5.3.1-3> appears, and such functions as preview, delete, and copy can be performed.



[Exercise 5.3.1-1] Conduct the design preview for “63.SST” saved in the floppy diskette and copy it in #12 Room.


① In <Fig. 5.3.1-2>, select _____ and press _____ .

Then, the window appears as in <Fig. 5.3.1-3>.

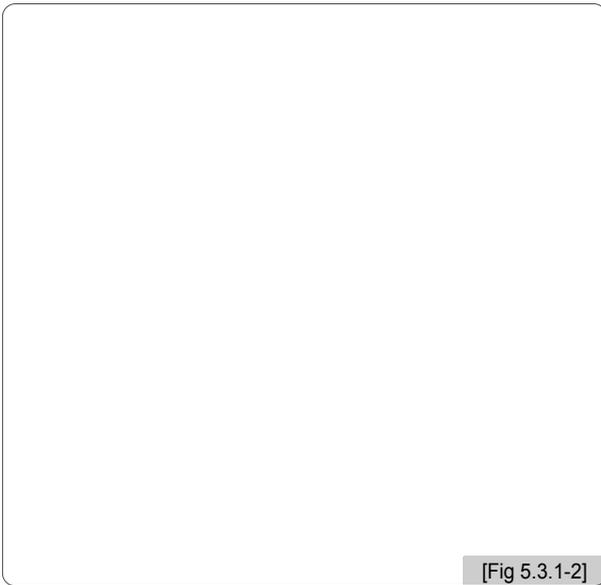

② Press _____ .

As in <Fig. 5.3.1-4>, the design is displayed on the pre-view window.




③ Select the room number.

Use the Room _____ Up/Down buttons to select the room number. When the buttons are pressed, the empty rooms are displayed in order. Select #12 Room.

4 Press

As in <Fig. 5.3.1-5>, the status bar at the bottom of the window turns green, showing the copying progress. When the bar is completely green, it means that copy is finished, and the window disappears. As in <Fig. 5.3.1-6>, the design copied in #12 Room can be checked. To check the design copied, see “5.2 Design Call.”




[Exercise 5.3.1-2] Delete “63.SST” in a floppy diskette.

① Select _____ as in <Fig. 5.3.1-2> and press _____ .

② Press _____ .


Then, <Fig. 5.3.1-7> appears. The message asking “Do you want to delete the design data?” appears on the screen.

If you want to delete it, press _____ . If you do not want to delete it, press _____ .

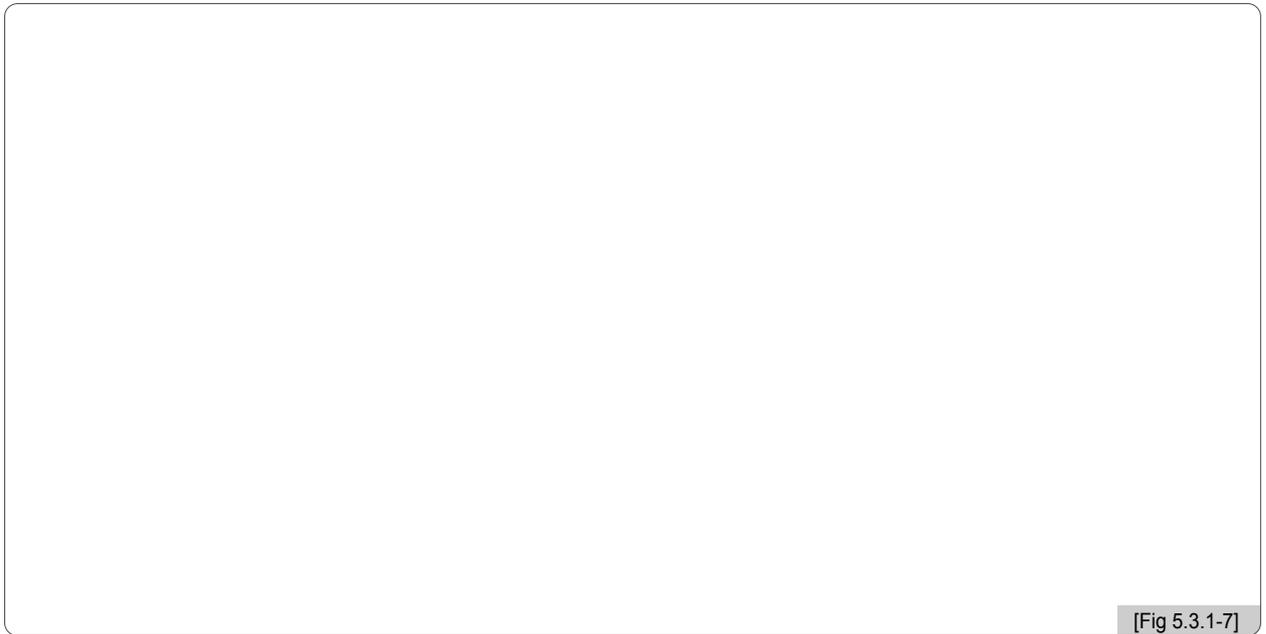

③ Press _____ .

As in <Fig. 5.3.1-8>, the files are deleted.



 **[Exercise 5.3.1-3] Floppy Diskette Format**

① Press in <Fig. 5.3.1-1>.

[Caution]


If a floppy diskette is removed from the disk drive while being used, the data in the diskette might be deleted or the diskette itself can be damaged.

5.3.2 USB Input


This function is to enter embroidery designs saved in the USB memory to the OP Box.

Insert the USB memory containing embroidery design files into the USB port.

When “USB” is selected in <Fig. 5.3.0-1>, <Fig. 5.3.2-1> appears.



You can move around by pressing , as in <Fig. 5.3.2-1>. <Fig. 5.3.2-2> shows the design files contained in the chosen folder. To move to the upper-level folder, press the “ ” folder on the left-hand side.



When a design is selected in <Fig. 5.3.2-2>, <Fig. 5.3.2-3> appears.




The preview function is run immediately at the USB memory and the input/delete functions keys are displayed. Please use the delete and copy functions like '5.3.1 Floppy'.

5.3.3 Serial Input

This function is to import embroidery designs from embroidery design program Wings to the OP Box.

Use the serial cable to connect to the OP Box. Call embroidery designs from Wings after establishing the connection. When the screen appears, press 'File' on the menu and select 'Output' on the file menu. When selecting 'Other' on the export menu, the Design Output window appears. If driver has not been installed, press 'Add Driver.' When the 'Add Wings I/O Driver' window appears, open the Sunstar.wio file, the Sunstar-dedicated driver. Select the driver newly added to the Design Output window and press OK. Select the desired format and press OK.

While designs are exported from the Wings program, select 'Serial' in <Fig. 5.3.3-1> and press SET, and then <Fig. 5.3.4-1> appears. Preview and Delete functions cannot be used. Select a room number by using PAGE Up/Dn buttons and press . Then <Fig. 5.3.3-2> appears.






[Fig 5.3.3-2]

To check the designs copied after design loading, see “5.7 Design Call.”

5.4.0 Setting

- On the setting menu, overall setups regarding embroidery can be made. There are seven sub-menus under the setting menu, which include basic setting, embroidery parameter, machine parameter, needle bar parameter, frame offset, options, and the other settings.

On the initial screen, press [] among main function buttons, and <Fig. 5.4.0-1> appears.



[Fig 5.4.0-1]

- **Basic setting** : Sets zoom-out, zoom-in, and angle.
- **Embroidery parameter setting**: Sets parameters related to embroidery.
- **Machine parameter setting**: Sets parameters related to machine.
- **Needle setting**: Selects or changes the needle bar.
- **Frame offset setting**: Designates the off-set point on designs.
- **Options setting**: Sets option devices such as coding and boring.
- **The others setting** : Determines needle type and sets thread sensing.

※ Setting Tips

To conduct basic, embroidery parameter, machine parameter, frame off-set, and options setting, press each button, and <Fig. 5.4.0-2> appears to enter values for setting.

- <Fig. 5.4.0-2> is the screen where X scale can be set using the basic setting.

- On the very top, there is title “X Zoom-out/in” and the line below displays the setting scope of X Scale in red print.


- The next line is the space to enter a desired value.

- Use the number buttons to enter a desired value.

- Press CL to correct the entered value.

- Press to apply the entered value.

- Press to cancel the entered value.

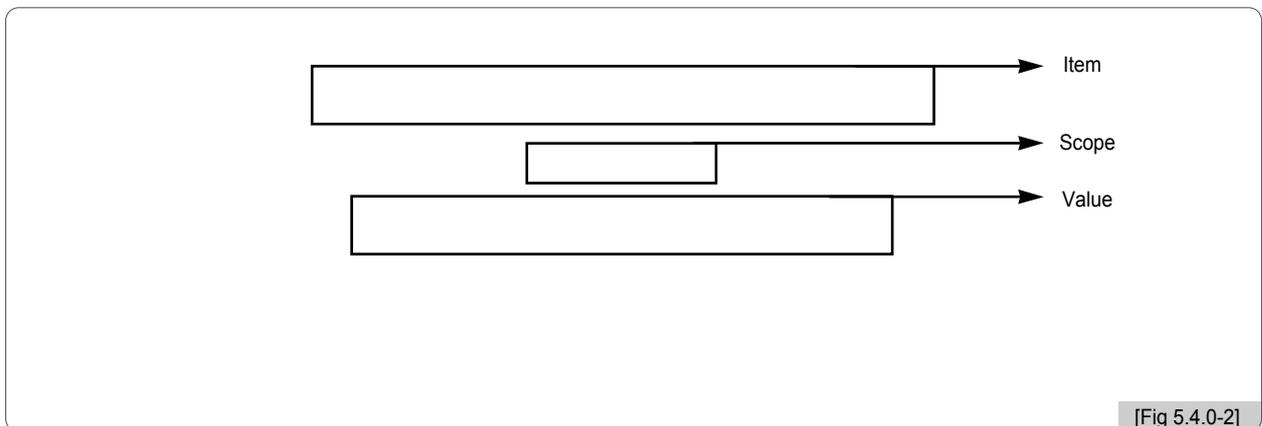

5.4.1 Basic Setting


Press the basic setting button in <Fig. 5.4.0-1>, and the nine basic settings appear on the screen as in <Fig. 5.4.1-1>.

When [] is pressed, the existing setting becomes initialized, and the default values saved in the operating program are recovered. If the setting exit is desired, press [] .




[Fig 5.4.1-1]

① **X Scale** : Enlarges or reduces a design in the X-axis direction.

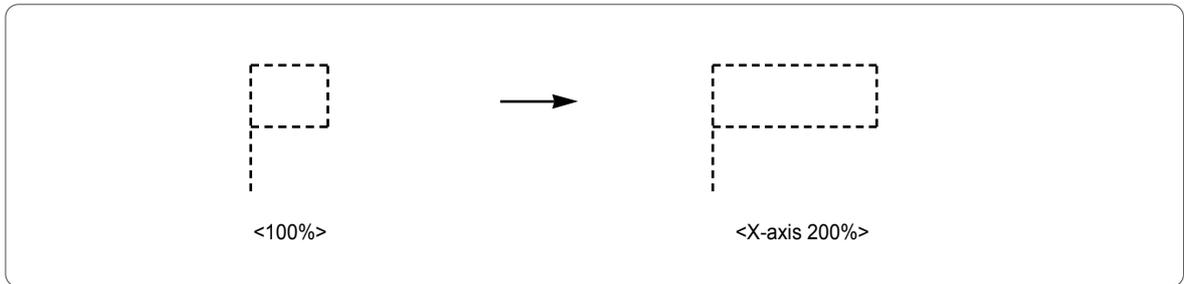


The default is 100%, and the value can be adjusted from 50% to 200% by the unit of 1% .


② **Y Scale** : Enlarges or reduces a design in the Y-axis direction.

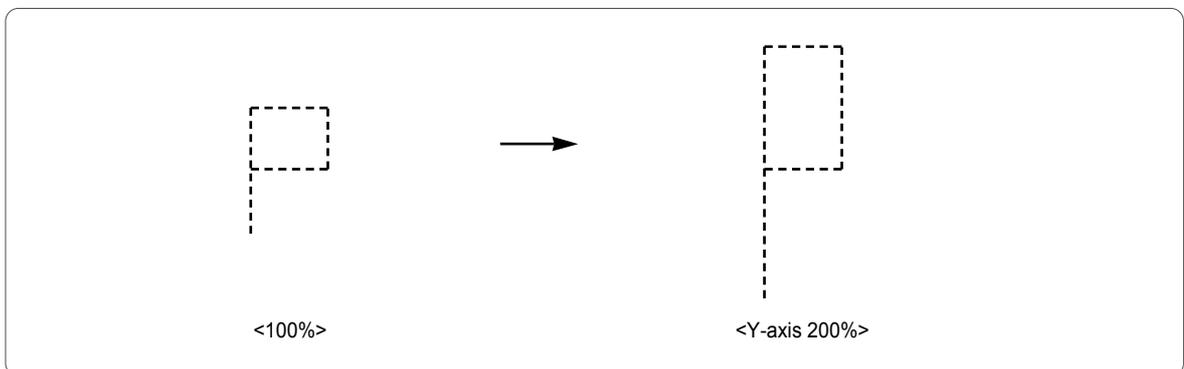

The default is 100%, and the value can be adjusted from 50% to 200% by the unit of 1% .

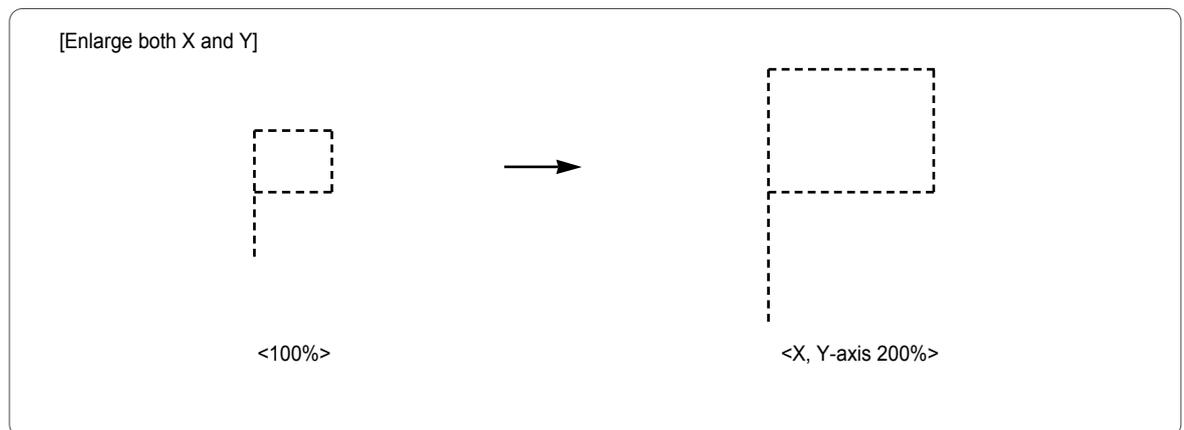


③ Angle : Turns around the embroidery design according to the rotation angle value set.

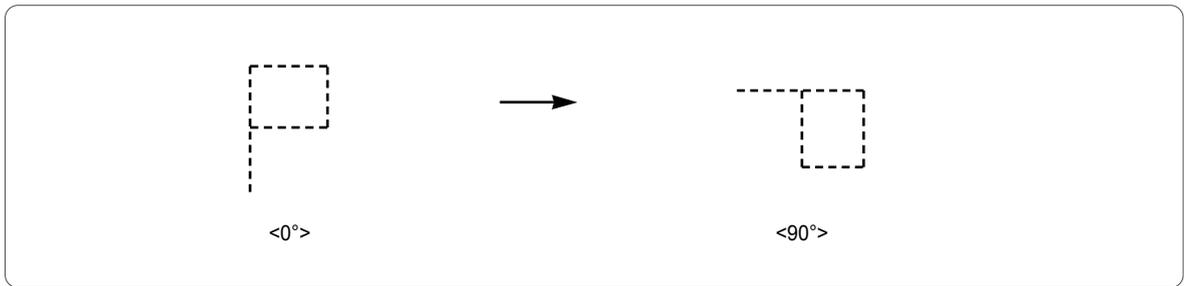

The default is 0°, and the value can be adjusted from 0° to 359° by the unit of 1°.

④ Mirror : Reverses a design based on X, Y, or X_Y axes.

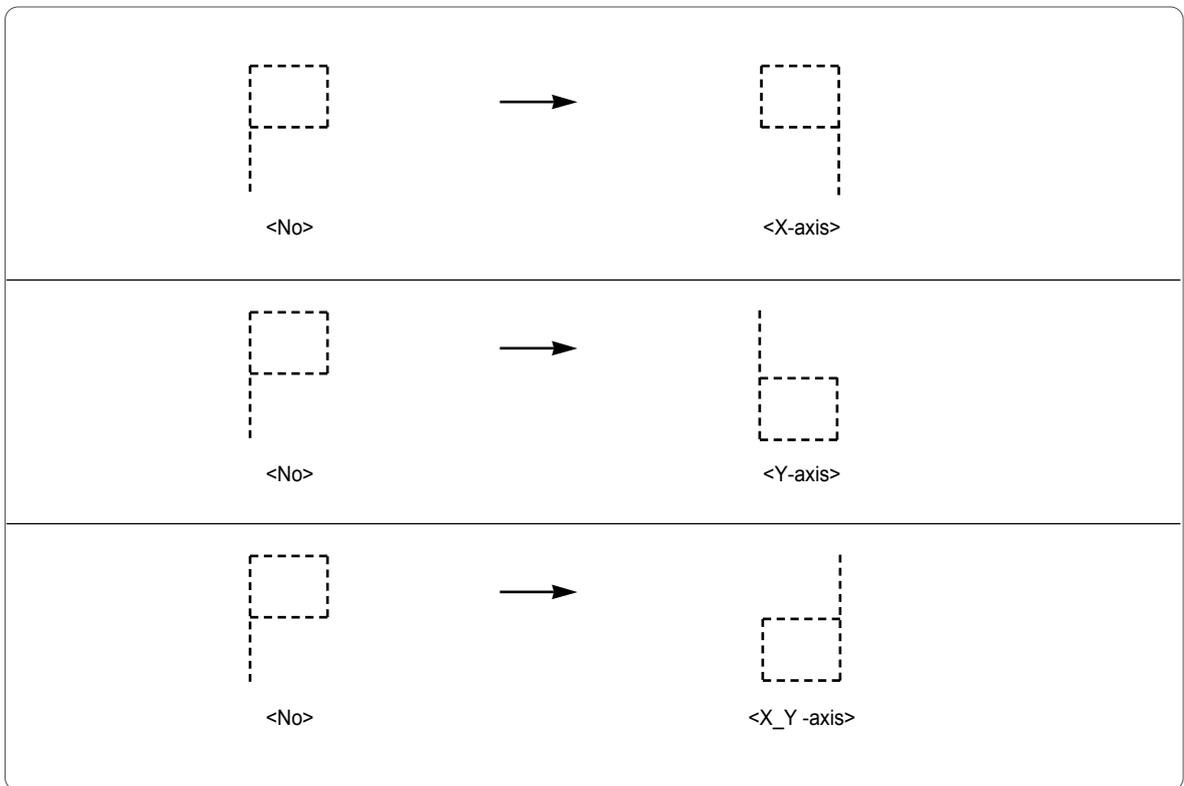


The default is “0” or “normal work.”

Value	Description
0	Basic setting
1	X-axis reverse
2	Y-axis reverse
3	X_Y-axis reverse

⑤ X Satin

In case where the embroidery design is a satin stitch, this function can set the satin width.

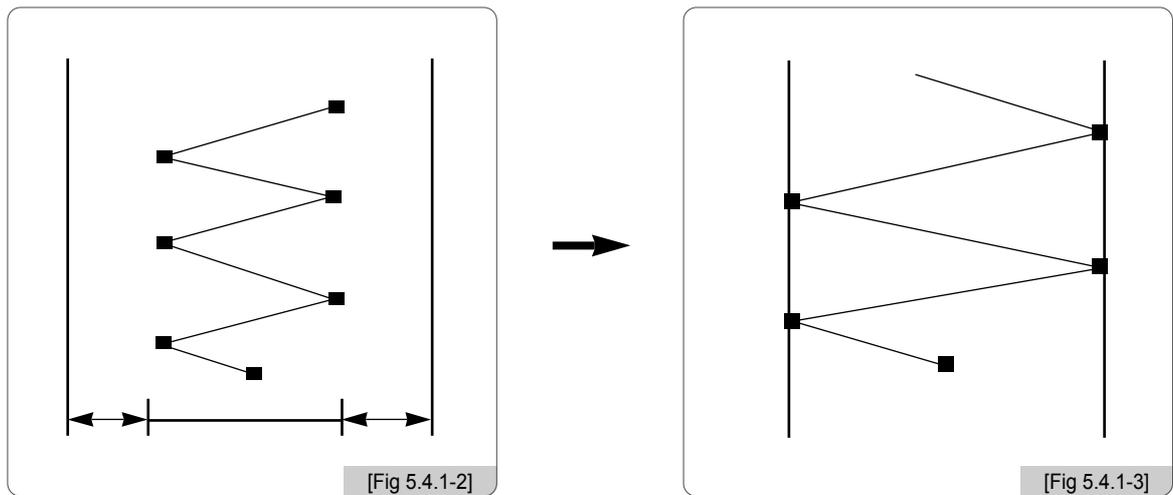


This function determines the satin stitch length in the X-axis direction. The value can be increased by the unit of 0.1inc.

⑥ Y Satin

This function sets the Y-axis satin width.

⑦ Start stitch


This function sets the starting stitch number for the embroidery design to be worked. It enables skipping as many as stitches desired for embroidery work. For instance, there is a design with a total of 10,000 stitches below. The design on the left side has entire stitches embroidered. On the right side, the design has only 5,000 stitches since the starting stitch number was set at 5,000.

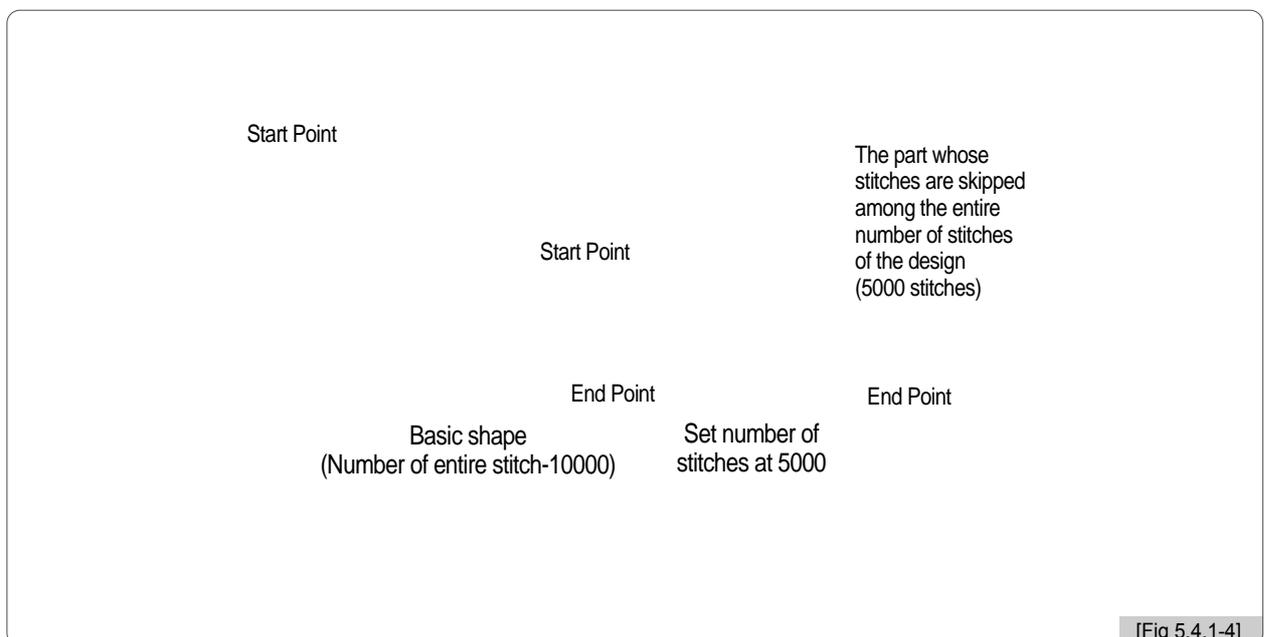

[Fig 5.4.1-4]

⑧ Offset Function

This function determines whether to use the automatically designated off-set function or not.

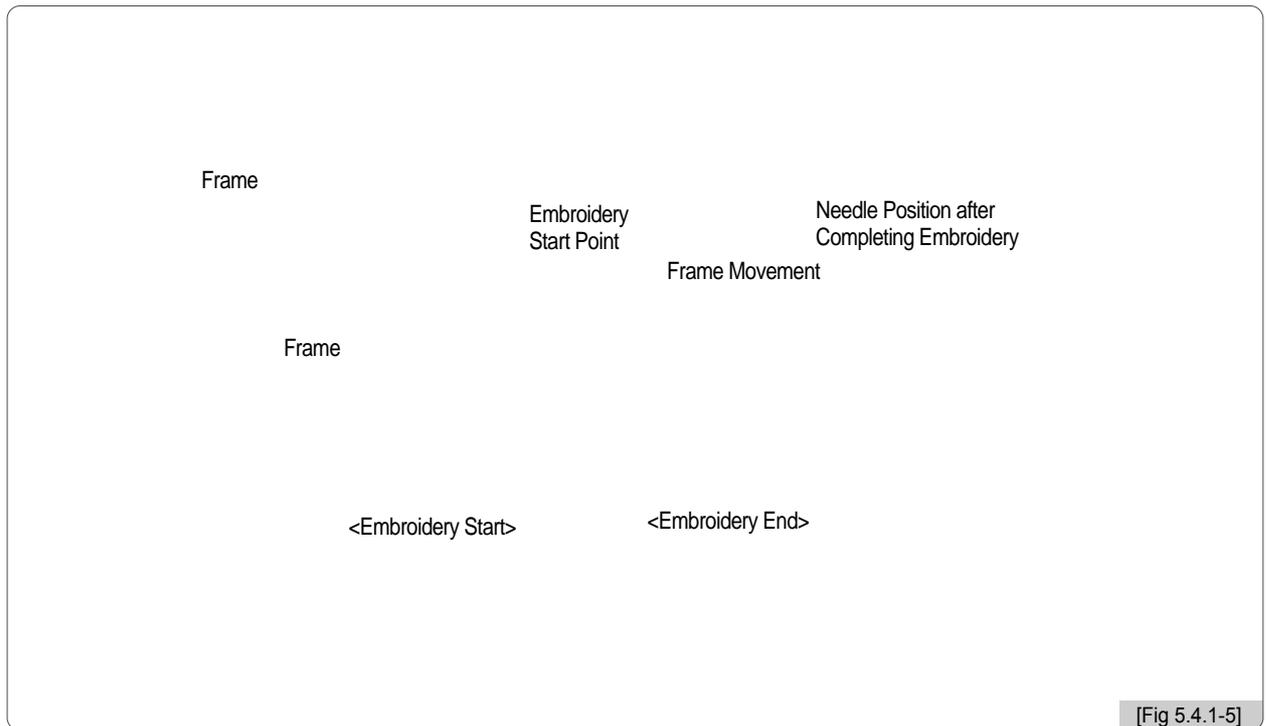

[Fig 5.4.1-5]

★ Setting Tips to Use Frame Offset Work Function


1. Select 'Yes' for the question asking the frame coordinates setting in the basic setting situation.
2. Go to 'Setting' → 'Frame Offset Setting' and determine the starting position, the offset middle position, and the stop position after design completion (offset) (5.4.5 Frame Offset Setting)
3. To use the offset function during embroidery work, go to 'Main Function Menu' → 'Setting' → '5.4.5 Note for Frame Offset Setting', and enter the desired value to 'Frame Offset Position.'

※ The above three settings shall be made to carry out the frame offset work.

⑨ Jump Convert

This function is to move the frame after trimming, in the case where consecutive jumps take place and they occur more than the set value.

For instance, let's assume that the set value is 5. Then, the machine conducts jump stitches without trimming until 4 stitches. If the consecutive jump with over 5 stitches is found, conduct trimming first and move 5 stitches back and start embroidery again. The default is 3 stitches and the value can be adjusted from 1 to 10 by the unit of 1 stitch.

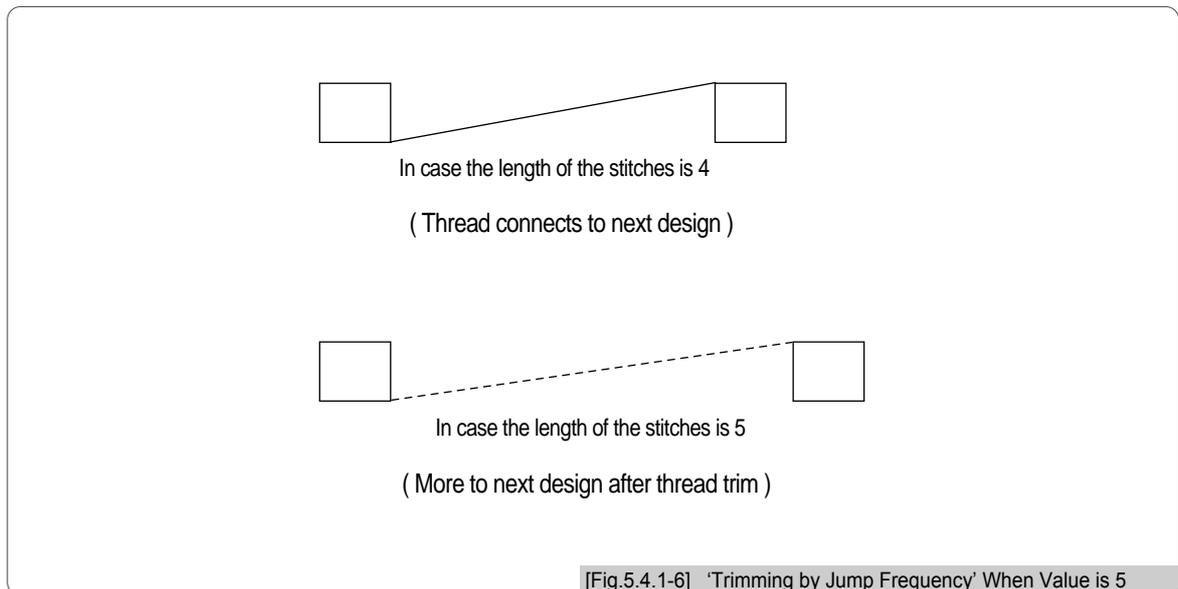

[Caution]

If '0[st]' is chosen, when consecutive jump takes place, there will be no trimming regardless of the number of stitches for the number of consecutive jump.

① Total stitch clear

“ ST” as in “4.2.0 Work Information Screen” is the function to accumulate the total number of stitches worked so far from the beginning of machine use or from the information initialization. This function initializes the total stitch number into zero.

② Total work clear

“ WK” as in “4.2.0 Work Information Screen” is the function to accumulate the total number of embroidery works produced so far from the beginning of machine use or from the information initialization. This function initializes the total work number into zero.

(When initialization is desired, press “0” and then press . If initialization is not desired, press .)

③ Auto origin return

This function makes the frame return to the origin after embroidery work is completed.

– The default is “Yes (1)”. If the return to the origin is not desired, enter “No (0)”.

④ Jump change data

This function sets the needle width to change the regular code to the jump code.

– The default is 8.0 mm, and the scope of adjustment is from 5.0 to 12.7 mm and it can be set by the unit of 0.1 mm.

For instance, if the distance between two needles is longer than the set value when the frame moves from one needle to the other needle, it becomes a jump stitch.

⑤ Auto backtack

The function sets the backtack performance to create stitch for embroidery beginning (thread release prevention).

– The default is “All”. It can be changed to “No(0)”, “Start Backtack(1)”, “End Backtack(2)”, and “All(3)”.

⑥ Jump convert(length)

If the total stitch length of the consecutive jump code is above the set value, trimming is primarily performed before carrying out the next work. This function can set the maximum jump stitch length.

– The default is “No”. The scope of adjustment is from 1mm to 50mm by the unit of 1mm.

⑦ Applique

This function is used to set up the needle bar. If the needle bar is consecutively entered for needle bar setting, and applique is “Yes”, the machine automatically stops without trimming when the needle bars overlap.

– The default is “Yes”.

⑧ Auto back stitch

When thread break is sensed, this function sets the number of backward stitches.

– The default is 2 and the scope of adjustment is from 0 to 5 by the unit of 1 stitch.

⑨ Auto start after trimming

The function sets up whether embroidery automatically begins after jump code and trimming or trimming by suspension code.

– The default is “Yes”. If automatic start is not desired, enter “0” to choose “No”.

⑩ Auto start after frame back

This function sets whether the machine will automatically start when reaching “12) the previous needle position after backstitch in case where the frame moves backward from the stop position and resume working.

– The default is “Yes”. If automatic start is not desired, enter “0” to set “No”.

⑪ All Head Swing After Stitch Back

When the machine stops, move the frame backward. Use the bar switch to decide whether to operate the heads with broken thread or whether to operate all heads.

– The default is ‘Each’. To operate all heads’ needle bars, enter ‘0’ to select ‘all.’

⑫ All Head Start Point After F.B

If the machine stops operating after detecting that one of the needle bars has a problem (ex. thread break), while all or multiple needle bars are simultaneously operating, conduct the back-stitching to correct the part where embroidery was not conducted due to the problem. Select to operate the needle bars which have a problem and make them move from the position prior to the problem area. This way the unwanted embroidery which inevitably occurs due to the lower thread’s dragging can be corrected with the overlapping embroidery. This function is to set the relative position where all needle bars start moving from the machine stop point. The default is 3[st] and the setting range is from 1 to 20[st].

⑬ Frame forward / Back moving unit

This function sets the number of stitches which are fed by the once time operation of the bar switch with an aim to move the frame forward or backward.

– The default is one stitch and the value can be set at the range from one to ten by the unit of one stitch.

⑭ Optimize method

The section where embroidery is conducted in running stitch at the place certain distance away from the outline of design is called gauge. This function sets the distance value between the gauge and the design outline.

– The default is 1mm and can be adjusted at the range from 1 to 9 mm.

⑮ Software limit setting

The function sets whether to use the virtual frame limit or not.

– The default is “No.”

⑯ Thread break moving

Set up the length for embroidery frame to feed backward of machine automatically to make thread a needle at ease when the machine is stopped by the detection of thread cutting.

- The default value is 0[cm], setting up is available from 0 to 90[cm] by 1[cm].

① Max. Speed

This function sets the maximum embroidery speed.

- The default is 1000[rpm], and the value can be adjusted at the range from the minimum speed to 1000[rpm] by the unit of 10[rpm].

② Min. speed

This function sets the minimum embroidery speed.

- The default is 300[rpm], and the value can be adjusted at the range from 300 [rpm] to the maximum speed by the unit of 10[rpm].

③ Embroidery speed

This function sets the embroidery speed.

- The default is 800[rpm], and the value can be adjusted at the range from the maximum speed to the minimum speed by the unit of 10[rpm].

④ Inching speed

This function sets the starting speed for embroidery work.

- The default is 100[rpm], and the value can be adjusted at the range of 50[rpm] to 200[rpm] by the unit of 10[rpm].

⑤ Jump speed

This function sets the range of the jump stitch speed, which is characterized by frame move without sewing.

- The default is 900[rpm], and the value can be adjusted at the range from 300[rpm] to 900[rpm] by the unit of 10[rpm].

⑥ Slow speed

This function sets the embroidery speed during slow operation.

- The default is 650[rpm], and the value can be adjusted at the range from the minimum speed to the maximum speed by the range of 10[rpm].

⑦ After trimming inching stitch

When the color change signal is issued or when embroidery work for one design is completed, the closing is conducted. At this time, the function sets the number of stitches to be made during slow operation.

- The default is three stitches, and the value can be adjusted at the range from three to ten stitches by the unit of one.

⑧ Auto trimming

This function determines whether to enable the automatic trimming function.

- The default is “Yes”, and To turn off the automatic trimming function, choose “No”.

⑨ Automatic color change

This function determines whether to enable the automatic color change function.

- The default is “Yes”, and to turn off the automatic color change function, choose “No.”

⑩ Undefined Menu

⑪ Undefined Menu

⑫ Frame speed setting

This is to set the frame move speed during frame feeding, such as automatic return to origin and offset move.

- The default is “High Speed(1)”. To set low speed, enter “Low Speed (0)”.

⑬ Frame move method(trimming)

This is to shake the frame left or right to separate the thread from embroidery materials after trimming.

- The default is X(1). To set the move direction along the Y-axis direction, select Y(2). If no direction is selected, choose “NO(0)”.

⑭ Inching stitch

When starting embroidery, the machine starts operation at the inching speed. This function is to set the number of stitches to be made during inching operation.

- The default is 2 stitches, and the value can be adjusted at the range from 2 to 10 stitches by the unit of 1 stitch.

⑮ Needle move function(offset)

The function to lift needle bar by activating Jump motor when you move it to Offset position.

- The default value is Yes(1). When it is no in use, the default value is No(0).

⑯ Power-on auto origin

This function is to automatically find the origin after the power is on.

- The default is “No”. If “Yes” is chosen, but the origin setting is wrong or the machine develops problems, all settings shall be initialized. For setting initialization, see “2) Program setting Initialization of 3.1.3 Memory”.

⑰ Start / end filter

This function is to prevent thread break by conducting automatic filtering for the stitch of 0.5mm or shorter, when starting or closing embroidery.

- The default is 0.0[mm], and the value can be adjusted from 0.0[mm] to 0.5[mm] by the unit of 0.1[mm].

⑱ Speed switching data

If the embroidery material is so heavy as to make normal embroidery work impossible, this function slows down the overall embroidery speed.

- The default is “High Speed(1)”. The embroidery speed is reduced by 30~50rpm.

⑲ Thread break sensor

If the sensor detects the consecutive breaks of the upper thread at the set length, the machine will stop its operation. This is to prevent false detection associated with sensor’s malfunction.

- The default is 3[st], where the thread sensing function is enabled. The value can be adjusted from 0 to 10[st] by the unit of 1[st]. If the thread sensing function is not desired, enter “0”

⑳ Thread break method

This function is to set the sensitivity of the sensor when it detects thread.

- The default is Low(0), and the other options to choose include High(2) and Medium(1).

㉑ Undefined Menu

㉒ Frame start angle for ‘A’ area

When the embroidery width is 1.9mm or below, this function sets the rotation angle of the main shaft when the frame starts moving.

- The default is 240 ° , and the value can be adjusted from 230 ° to 250 ° by the unit of 1 ° .

㉓ Frame start angle for ‘B’ area

When the embroidery width is 2.0mm or above, this function sets the rotation angle of the main shaft when the frame starts moving.

- The default is 240 ° , and the value can be adjusted from 230 ° to 250 ° by the unit of 1 ° .

[Note]

Selection of polyester yarn mode : If the frame feed starting angles (A) and (B) are set at 250°, the polyester yarn mode will be selected and the looping, which occurs during embroidery, can be prevented.

㉔ Picker Off Time (Trimming)

This function is to set the length of the remaining upper thread at the needle when automatic trimming is conducted.

- The default is 13[ang]. If the value set is smaller than the default, the remaining upper thread will be short, and vice versa. The value can be adjusted from 0 to 60[ang] by the unit of 1[ang].


5.4.4 Needle Setting (Color)

This function is to enable automatic exchange of needle bars when the thread color change code appears. It is also able to change the colors of the embroidery design displayed on the screen.


<Fig.5.4.4-1> and <Fig.5.4.0-1> appear when the needle bar setting button is pressed to set the needle bars.

The needle bar setting is divided into three parts: needle bar choice, needle bar change, and color change.

- **Select** : This is the menu where the order of changing needle bars is set when the color change code appears during embroidery. Up to 300 color change codes can be applied.
- **Change** : This enables the user to change the 1 or 1 match between the needle bar table and the needle bar at the his/her discretion.
- **Color change** : This function is to change the colors of each needle bar.

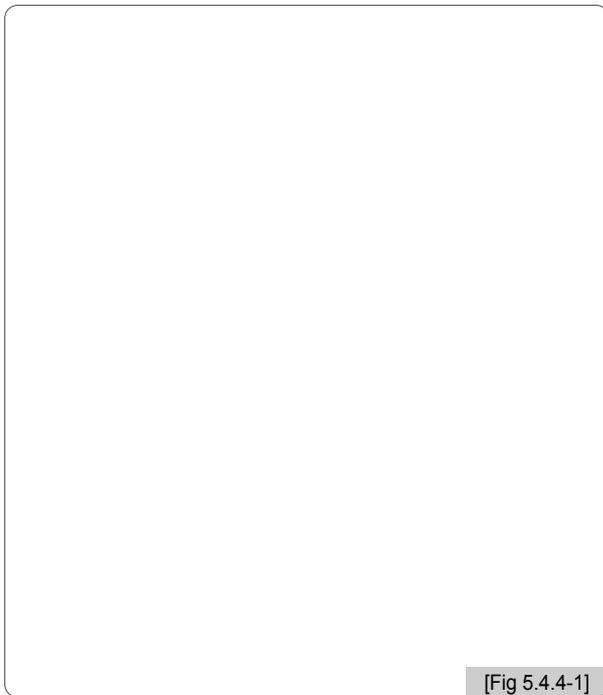

[Fig 5.4.4-1]

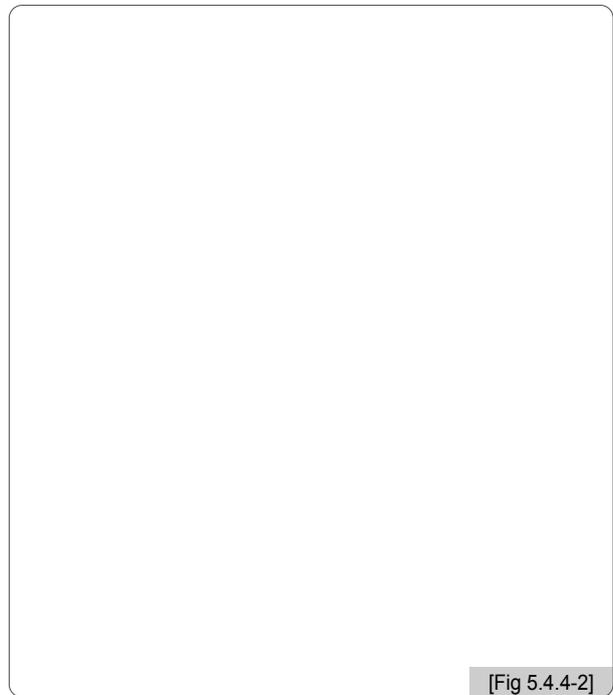

[Fig 5.4.4-2]

■ To understand the above, let's look at the head section of the SWF multi-head embroidery machine as in <Fig. 5.4.4-2>.

As in <Fig. 5.4.4-2>, the multi-head embroidery machine has needle bars for each of which unique number is designated. Each number is matched one or one to the standard needle bar as in <Fig. 5.4.4-1>. If the standard needle bar and the changed needle bar are same, the needle bar with a unique number on the head section as in <Fig. 5.4.4-2> will operate. The unique numbers can be virtually changed by pressing the change button. Here is an example for clearer understanding.

- The following is the button used for needle bar setting. Use the direction buttons and to select a menu. To enter the desired value, use the number buttons.

NEEDLE BAR CHOICE

NEEDLE BAR CHANGE

COLOR CHANGE

: This function is to insert needle bars when there are needle bars already entered in between them.

: This function is to delete needle bars among the already entered needle bars.

: This function is to initialize the needle bar setting.


: This function is to virtually display the completed view.

: This function is to apply the set value.

NEEDLE BAR COLOR SELECT BUTTON

(1) Needle Bar Choice

This function is to determine the changing order of needle bars when the color change signal appears during embroidery. Press “Needle Bar Choice” in <Fig. 5.4.4-1>, and the necessary buttons for needle bar choice are enabled as in <Fig. 5.4.4-3>. Let’s take an example to explain how to use the function.



[Fig 5.4.4-3]

[Note]

Once the needle bar setting is made, the setting is continuously applied even after the machine is turned off and on. When other embroidery design is called, the needle bar setting values are unchanged. As such, when the design is changed or other setting is desired, the needle bar setting shall be reset.



[Exercise 5.4.4-1] Needle bar choice

Call the design in #37 Room and set the order of needle bars like 7-3-5-1-6-4-2-1.

① Call the design in #37 Room as in <Fig. 5.2-6>.

(For design call, see “5.2 Design Call”.)

② Press


③ Use the up/down buttons on the setting menu to move to “Needle Bar Parameter setting” and press

④ Move to the needle bar choice menu.

As in <Fig. 5.4.4-4>, Add, Delete, Initialize, and Simulation functions become enabled. The cursor is located on No. 1 for order choice.

- ⑤ Use the number buttons and enter 7.

As in <Fig. 5.4.4-5>, 7 is entered in No. 1, and the cursor moves to No. 2 for entry.



[Fig 5.4.4-5]

- ⑥ Repeat the above method and enter 3, 5, 1, 6, 4, 2, 1 in order by using the number buttons.

- ⑦ Make sure for accurate setting and press .



[Exercise 5.4.4-2] Add, Delete needle bars


The order of needle bar is 7-3-5-1-6-4-2-1. Insert #9 needle bar (between #1 and #6) and delete #4 needle bar.

The precondition of this exercise is that [Exercise 5.4.4-1] shall be conducted first.

① Move to the needle bar choice menu.

② Use the direction buttons to move to #5 needle bar position.


As in <Fig. 5.4.4-6>, the cursor is located at the place which is taken by “6”.



[Fig 5.4.4-6]

③ Press .

As in <Fig. 5.4.4-7>, “6” is copied, and the needle bars increase by one.



[Fig 5.4.4-7]

- ④ Press the number button “9”.


As in <Fig. 5.4.4-8>, “9” is inserted.



[Fig 5.4.4-8]

- ⑤ Use the direction buttons and move the cursor to “4” under #7 needle bar.


As in <Fig. 5.4.4-9>, the cursor will move to the “4” position.



[Fig 5.4.4-9]

⑥ Press .

As in <Fig. 5.4.4-10>, number “4” is deleted, and number “2” is placed under #7 needle bar.




⑦ Press to apply the setting.

(2) Bar Change

This function is to virtually change the needle bar numbers fixed as in <Fig. 5.4.4-2>.

Let's assume that the needle bar numbers are set as 1, 2, 1, 2, 1, 2, 1, 2, 1, 2 according to the order of color change. If it is desired to change the needle bars designated as No. 2 into No. 1, this function enables making the change all at once. Press the needle bar change button, and change No. 2 to No. 1. Then, with one-time operation, all needle bar colors can be changed.

<Fig. 5.4.4-11> shows the screen when the needle bar change button is pressed. Let's get to know more about how to use the function via an exercise.




[Fig 5.4.4-11]



[Exercise 5.4.4-3] Needle bar change


**No. 1 needle has brown thread, and No. 2 needle has blue thread.
The order of color is 1-2-1-2-1-2-1-2-1-2. It is needed to change all embroidery colors to brown by using the needle bar change function.**

- ① First of all, call a design.
(For design call, see “5.2 Design Call”.)
- ② Use the select buttons as in <Fig. 5.4.4-12> to set the order of colors as 1-2-1-2-1-2-1-2-1-2. (See [Exercise 5.4.4-1] ‘Needle bar select’.)
- ③ Move to the needle bar change menu.
- ④ Use the menu move buttons to go to No. 2 needle bar.

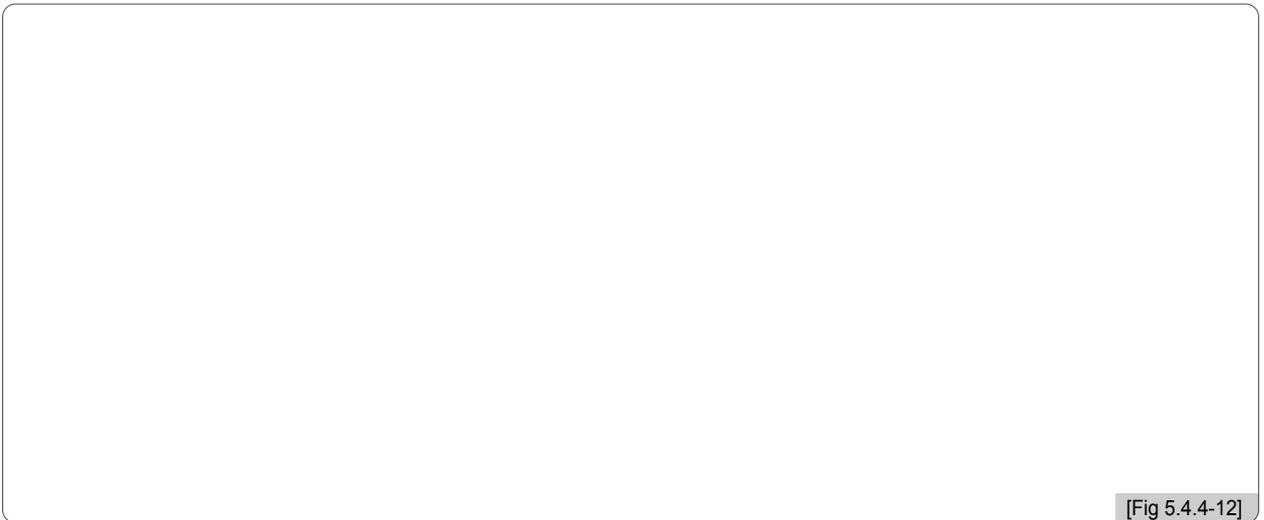

[Fig 5.4.4-12]

- ⑤ Press 1 on the number key pad.
In <Fig. 5.4.4-13>, confirm that the needle bar is changed at No. 2 position.

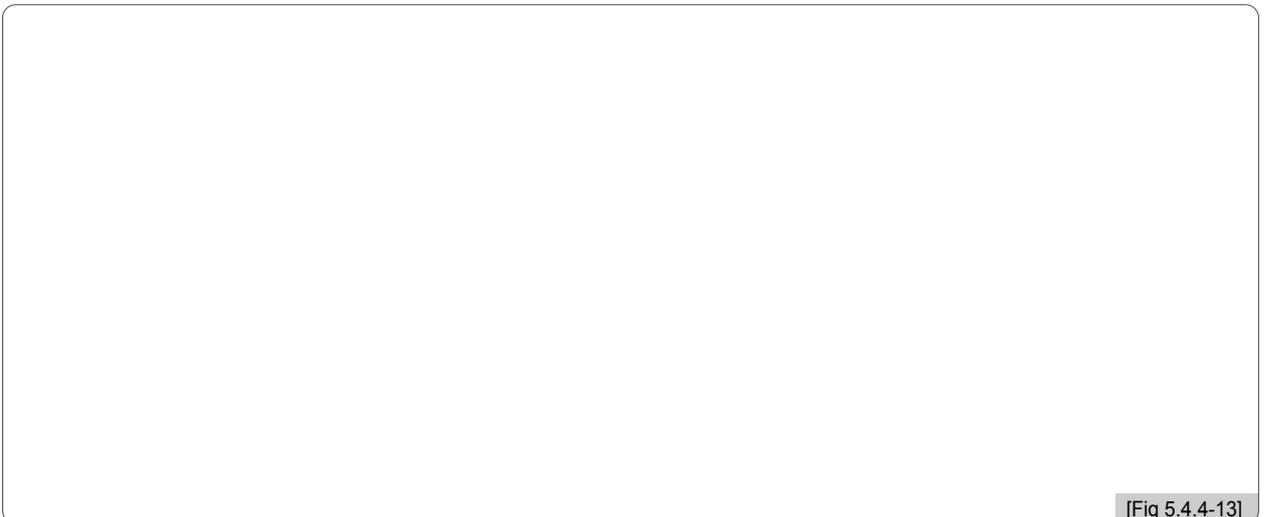

[Fig 5.4.4-13]

- ⑥ Press


(3) Color Change

This function is to easily show the needle bar (color) change-related information on the design by marking colors on each needle bar. It does not affect the actual embroidery work.

<Fig. 5.4.4-14> appears when the needle bar color is pressed.



Use the number buttons to select the desired needle bar, and then <Fig. 5.4.4-15> appears where colors can be chosen. Use the direction buttons to locate the cursor on the desired color and press .




On the color change window in <Fig. 5.4.4-15>, use the frame speed key to adjust the cursor move speed.

5.4.5 Frame Offset Setting

The function is to decide the starting position of the embroidery design, the offset position, and the stop position after work completion to ensure more convenient embroidery work.

<Fig. 5.4.5-1> appears when selecting the offset setting button on the _____ menu.



The sub-menus for frame coordinates are as below:

(DESIGN START POSITION) : It decides the frame's start position for the called design. When the starting position is pre-determined, regardless of the current frame locations, the frame automatically moves to the start position when the embroidery work begins.

(OFFSET MIDDLE POSITION) : It decides the middle position between the design starting position and the stop position when the design is completed to prevent the needle bar from contacting the embroidery materials. If the function is unnecessary, the same value can be entered for the design starting position and the stop position after design is completed. It does not adversely affect the machine operation.

(STOP POSITION AFTER DESIGN IS COMPLETED) : It decides the frame position where design is completed or the offset frame position. This function is useful for applique work and frame change.

[Caution]

1. If the frame coordinates setting (offset) is not set as 'Yes' in the basic setting, the setting of the frame coordinates is not applied during embroidery.
2. If the frame origin is incorrect, it is difficult to find the frame coordinates.

**[Exercise 5.4.5-1] Design start position - X : 500, Y : 300****Offset middle position - X : 1000, Y : 1000****Stop position after design completion (offset) - X : 1500, Y : 1700****Make the above settings.**

① Press "Frame Offset Setting" on the setting menu.

Then <Fig. 5.4.5-1> appears.

② Press .

The start position of the design becomes enabled.

③ Sets the X, Y values for the frame location by using the frame move buttons.

④ Press .

The offset middle position becomes enabled.

⑤ Set the X, Y values for the frame location by using the frame move buttons.

⑥ Press .

When the embroidery of the design is completed, the stop position becomes enabled.

⑦ Set the X, Y values for the frame location by using the frame move buttons.

⑧ Press .

5.4.6 Options Setting

Option setting means for setting up the embroidery machine option equipments. The embroidery machine options are coding, sequin, boring and zigzag equipments. The followings are option setting screens.




(1) Coding setting

① Press from the main function menu.

② Select Options Setting and press .


③ Select "1. Coding Setting" and press .

<Fig. 5.4.6-4> appears for setup.



④ Use the number buttons and press "1(Yes)". (<Fig. 5.4.6-5>)

To correct the entered data, press . To cancel, press .




⑤ Press .

It completes the coding setting.

⑥ Press the '8. CODING RPM'.

<Figure 5.4.6-6> is a screen to setup speed.



⑦ Enter the speed with the keypad in a range from a minimum speed to a maximum speed.



⑧ Press .

It completes the coding setting.

(2) Sequin setting (in case of Single Type Sequin)

- ① Press the button in main function menu.
- ② Press SET key after choosing the option setting at the screen.
- ③ Select '2. Sequin L' or '4. Sequin R' setting and press SET key.

The screen which Sequin L is setup as <Figure 5.4.6-7> and Sequin R is setup as < Figure 5.4.6-8> is displayed.

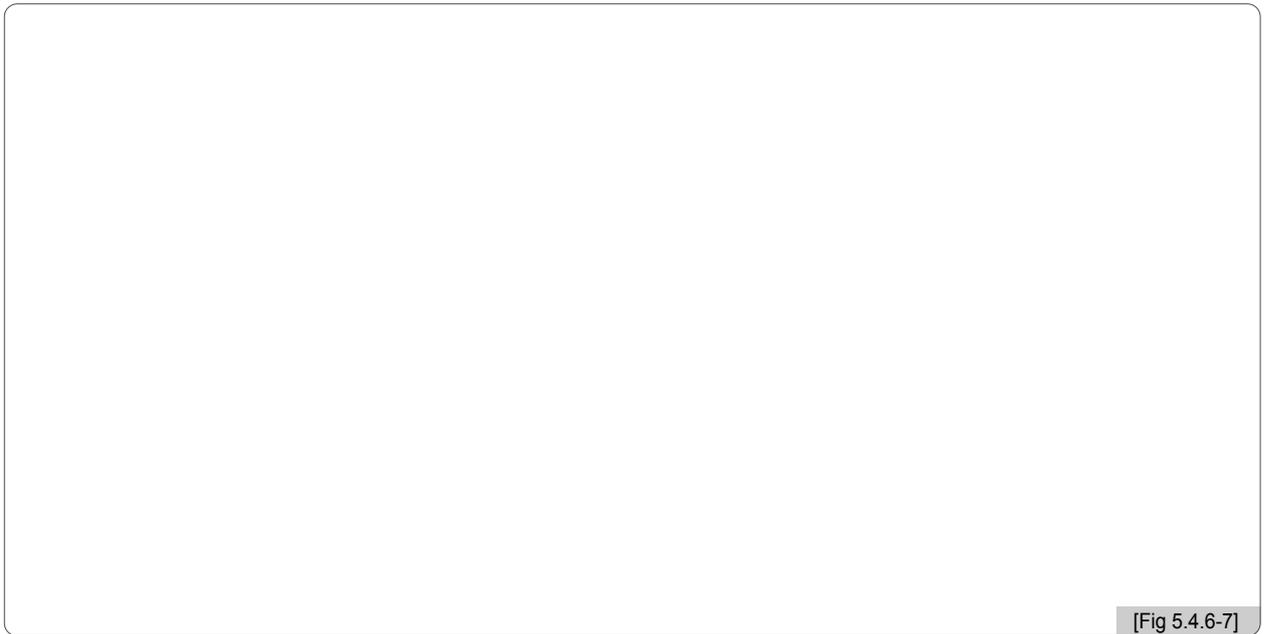

※ The following sequin setup is available.

NO(0) : Not Use Sequin

SQ30(1) : Use SINGLE TYPE

SQ30D(2) : Use DOUBLE TYPE


④ Press 1(SQ30) at the keypad.

If you want to correct it, press CL key. Or not, press ORG/ESC key.

⑤ Press .

⑥ Set up the length of sequin after choosing sequin type.

Press '3. Sequin (L) Length' menu or '5. Sequin (R) Length'. The screen which Sequin(L) length is set up as <Figure 5.4.6-9> and Sequin (R) Length is set up as <Figure 5.4.6-10> is displayed.




⑦ Enter the length with the keypad in a range from 3.0 to 9.9mm.

⑧ Press .

- ⑨ Press 'SEQUIN(L) DN RPM'.


<Figure 5.4.6-11> is a screen to setup speed.



- ⑩ Enter the speed with the keypad in a range from 300 to 800rpm.

- ⑪ Press .

- ⑫ Press 'SEQUIN WITH JUMP' at the <Figure 5.4.6-2>. The screen to set up the use of jump function is displayed when the sequin is setup such as <Figure 5.4.6-12>. Enter 0 or 1 with keypad.

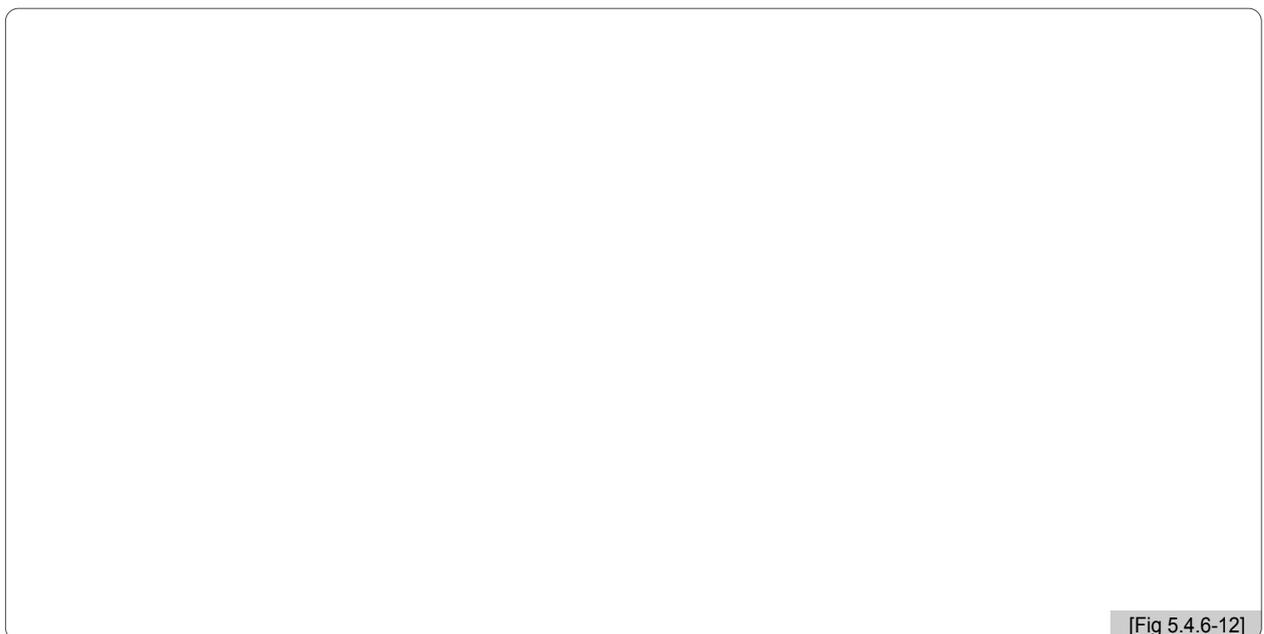

- ⑬ Press .

The sequin setting up is complete.

※ SQ30D setting (in case of Double Type Sequin)

① Set up the length of Sequin L and R.

The menu which can be set up a length of sequin like <Figure 5.4.6-13> and <Figure 5.4.6-14> when choosing '10. SEQUIN(L) UP LENGTH' or '11. SEQUIN(R) UP LENGTH' menu.

DN LENGTH is set up at the '3. Sequin (L) Length' menu or '5. Sequin (R) Length'.



② Set up the number of spangle(up and down)

When '12. SEQUIN UP NUMBER' is set to eight and '13. SEQUIN DN NUMBER' is set to five, five DN spangles are operated then eight UP spangles are operated.

The menu that is available to set up the number of spangle like <Figure 5.4.6-15> and <Figure 5.4.6-16> is displayed.



③ Set up the speed during sequin operation.


The menu that is available to set up the sequin speed like <Figure 5.4.6-17> and <Figure 5.4.6-18> is displayed when choosing '14. SEQUIN(L) UP RPM' or '16 SEQUIN(R) DN RPM' menu.

DN RPM is set up at '6. SEQUIN(L) DN RPM' or '15. SEQUIN(R) DN RPM' menu.



(3) Boring setting


- ① Press on the main function menu.
 - ② Select Options Setting on the setting screen and press .
 - ③ Select “7. Boring Needle Bar” and press .
- <Fig. 5.4.6-19> appears for setup.



- ④ Enter the number of the needle bar equipped with the boring within the range of permissible values.
To correct the entered data, press . To cancel, press .
 - ⑤ Press .
- This completes the boring setting.

(4) Zigzag setting


- ① Press the button in main function menu.
- ② Press SET key after choosing the option setting at the screen.
- ③ Select '17. ZIGZAG(L) RPM' or '18. ZIGZAG(R) RPM' setting and press SET key.
The screen which can be setup such as <Figure 5.4.6-20>, < Figure 5.4.6-21> is displayed.

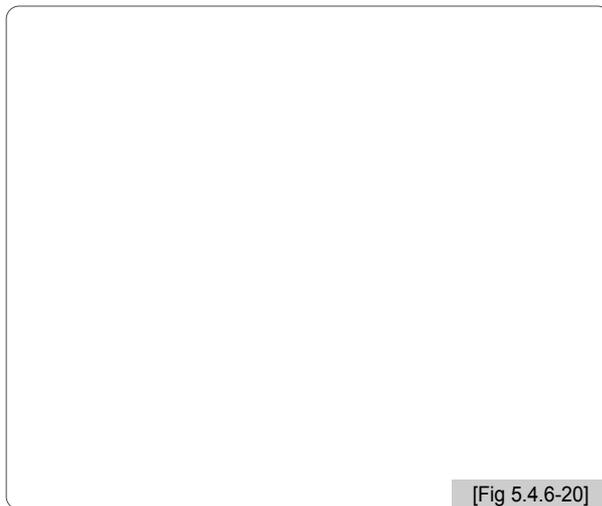

- ④ Enter the speed with the keypad when the zigzag device is equipped in a setting range. If you want to correct it, press key. Or not, press ORG/ESC key.
- ⑤ Press .
This completes the boring setting.

5.4.7 The Other Setting

Press Other Settings on the setting menu, and then <Fig. 5.4.7-1> will appear. There are four setting menus including the cutting needle bar setting, the trimming-related setting, the thread condition setting, and the date/time setting under the other settings menu.




[Fig 5.4.7-1]

(1) Cut needle set

This function is to set the needle bar equipped with the specially designed cutting needle to cut the embroidery fabric in the desired shape. To use this function, during embroidery, thread detection and trimming functions shall be suspended. The cutting needle bar setting is the function to automatically suspend the unnecessary functions, when the cutting function is used. <Fig. 5.4.7-2> is the screen where the “Cutting Needle Bar Setting” is pressed in <Fig. 5.4.7-1>. Pink means that the concerned needle bars were chosen for embroidery, and bright yellow means that the needle bars were set for cutting.

<Fig. 5.4.7-2> shows that No. 4 Head is set as cutting needle bar.



(2) Sensing head set

This function is unavailable for this type of machine.

(3) Trim set

There are three trimming-related settings: Trimming start angle setting, main-shaft start acceleration speed setting, and backtack length setting for trimming.




① Trim angle setting - This is unavailable in this machine type.

② Accelerating

This function is to set the time taken for the machine to reach the embroidery speed after the machine started operating at the inching speed.

- The default is Normal. Either Normal(0) or Slow(1) can be chosen.

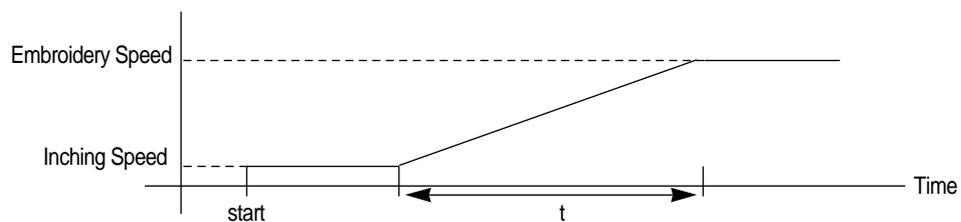

③ Start or end B/T length

This function is to set the length of a stitch while backtack is performed.

For thin or wool fabric, set the value at 0.8[mm], and the first stitch plaiting and trimming can be effectively performed.

- The default is 0.8[mm], and the value can be adjusted from 0.6 to 0.8[mm] by the unit of 0.1[mm].

(4) Undefined Menu

(5) Undefined Menu

(6) Thread select


This function is to select appropriate threads by conditions.

- The default is Normal(0). For wool, select Wool(1).

(7) Date/time setting

This function is to change the date and time displayed on the upper right side of the screen.

on the Other Settings menu, select No. 7, and the screen where date and time can be set appears as in <Fig. 5.4.7-4>.



[Fig 5.4.7-4]

Use the menu move buttons and the number UP/DN buttons for setting.

For date and time setting, see “4.4.2 Date/Time Change”.

5.5.0 Tools

- Setting menu for preparation before actual embroidery. There are seven setting menus such as Manual Trim, Frame Center, Hoop Select, Language Setting, Maintenance, and Zigzag Origin.

On the main screen, press _____, and the sub-menus appear as in <Fig. 5.5.0-1>.



[Fig 5.5.0-1]

- **MANUAL TRIM** : It enables the user to conduct trimming at desired time except for automatic trimmings conducted by the design code.
- **FRAME CENTER** : It sets the origin and the frame center.
- **HOOP SELECT** : It is possible to set the virtual frame limits depending on the shape and size of the hoop.
- **LANGUAGE** : It selects one of the nine languages for user's convenience.
- **MACHINE** : It conducts seven settings related to machine, including machine service, machine information, machine operation test, frame origin, error check, thread sensing check, and memory initialization.
- **ZIGZAG ORIGIN** : This is a function of setting up zigzag device(option) to the starting point.

5.5.1 Manual Trim

This function is to enable the user to conduct trimming when it is desired except for automatic trimmings activated by the design code during embroidery.

When is pressed, <Fig. 5.5.0-1> appears. Use the menu move keys, select Manual Trim and press . Then as in <Fig. 5.5.1-1>, the message box appears asking “Do you want manual trimming?” When is pressed, automatic trimming is conducted. When manual trimming is not desired, press or .




[Fig 5.5.1-1]

5.5.2 Frame Center

This function is to make the needle bar move to the center of the frame.

In <Fig. 5.5.0-1>, use the menu move buttons and choose Frame Center. When is pressed, the message box appears asking “Move to the Frame Center?” as in <Fig. 5.5.2-1>. When is pressed, the machine checks the origin and the needle bar moves to the center of the frame. When the move is not desired, press or .

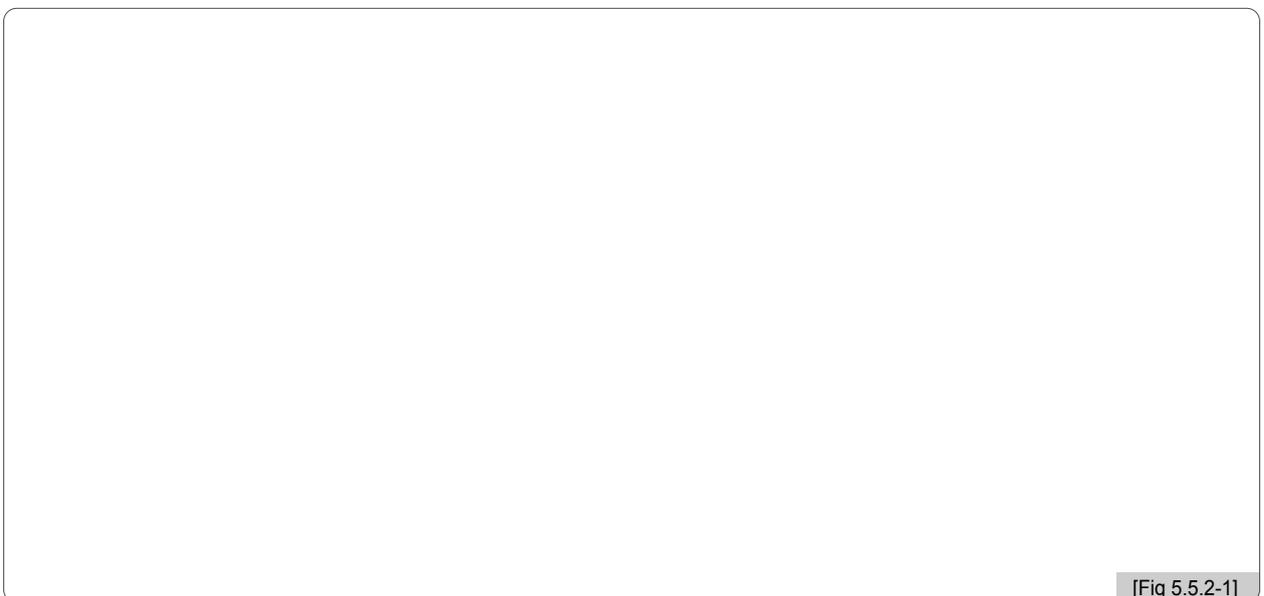

[Fig 5.5.2-1]

5.5.3 Hoop Select


This function is to select the hoop of desired size. Select the size of a hoop and press . Then, the frame automatically moves to the origin, and checks the X, Y frame limit by considering the offset location. When finding all the locations, return the frame to the original position.



5.5.4 Language

This function is to enable users to choose a language among nine languages including Korean, English, Spanish, Germany, Danish, Italian, Indonesian, Chinese, and Turkish for easier understanding.

Use the menu move buttons to move to the desired language and press for selection.



5.5.5 Machine

Machine Maintenance has seven sub-menus including machine service, machine information, machine operation test, frame origin, error check, thread sensing check, and memory initialization.

Use the menu move buttons in <Fig. 5.5.0-1> and select Machine Maintenance. When  is pressed, the sub-menus of machine maintenance appear as in <Fig. 5.5.5-1>.



[Fig 5.5.5-1]


- MACHINE SERVICE : It conducts the initial setting for jump motor and sequin motor.
- MACHINE INFORMATION : It lists up the SWF machine information.
- MACHINE TEST : It checks normal operation of all solenoids, thread sensors, etc.
- FRAME ORIGIN : It finds the frame origin.
- ERROR INFORMATION : It saves and displays the recently occurred errors by up to ten.
- MEMORY INITIALIZE : It erases all designs.

(1) Machine Service

This function is to check wrong machine settings and help create right settings.

(2) Machine Information

This function is to show the embroidery machine's mechanical information when initially setting up the embroidery operating program (For initial setting methods, see "3.2 Machine Setting Change".)




[Fig 5.5.5-2]

(3) Machine test

This function is to test whether the embroidery machine is properly operating by part.

<Fig. 5.5.5-3> will appear when the operation test button is pressed in <Fig. 5.5.5-1>.



[Fig 5.5.5-3]

- **Jump Test:** Check the normal operation of the jump motor and the jump solenoid.
- **Wiper Test:** Check the normal operation of the wiper solenoid.
- **Picker Test:** Check the normal operation of the picker solenoid.
- **Trimming Test:** Check the normal operation of the trimming solenoid.
- **Holding Test:** Check the normal operation of the main shaft holding solenoid.
- **Upper Thread Detection:** Check the normal operation of the upper thread sensor.

① Jump Test

Select the jump test as in <Fig. 5.5.5-3> and press the start button. Then all jump motors attached to each head start operating. When other operation tests are selected, they will be conducted after the previously selected test is completed.

② Wiper Test

Select the wiper test as in <Fig. 5.5.5-3> and press the start button. Then the head wiper motor operates once.

③ Picker Test

Select the picker test as in <Fig. 5.5.5-3> and press the start button. Then the picker solenoid installed near the hook operates for some 0.5 second.

④ Trimming Test

Select the trimming test as in <Fig. 5.5.5-3> and press the start button. Then the trimming solenoid operates for some 0.5 second.

⑤ Holding Test

Select the holding test as in <Fig. 5.5.5-3> and press the start button. Then the holding solenoid installed on each head will operate for some 0.5 second.


⑥ Upper Thread Detection

Select the thread sensing test as in <Fig. 5.5.5-3> and press the start button. Then the beep sound is issued. When the thread sensor is rotated, the lamp blinks. To finish the test, select “Thread Sensor Test” or press the stop button again. Then the beep sound is stopped, and the test is finalized.

(4) Frame Origin

When the frame origin button is pressed in <Fig. 5.5.5-1>, the frame will automatically move to the origin. In other words, when seeing the embroidery machine from the front, the frame will move to the most left and most front place to find the origin and then move to the opposite position to find the X,Y limits. When all the positions are found, the frame will be brought to the place when the function is activated. While the function is performed, if


ORG/ESC is pressed, the message box appears asking whether to stop the frame move as in <Fig. 5.5.5-4>. If you desire to stop the frame move, press .



[Fig 5.5.5-4]

[Caution]

Since the frame moves to the X,Y limits, the frame might strike them if some objects are placed on the table and it might damage the frame. Therefore, make sure that you do not place any objects on the table during embroidery.

(5) Error Information

SWF system can save up to 10 error messages for the errors which occurred during operation. This function displays the details of the errors saved in the memory. By reading the details of errors, the causes of problems can be easily found.

(6) Memory Initial

This function is to initialize the embroidery designs stored.


5.5.6 ZIGZAG ORIGIN

This is a function of setting up zigzag device(option) to the starting point.

5.6.0 Ready

- This function is to check whether the machine is prepared to conduct embroidery before work. There are five functions including work position, gauge, outline, route check, and scope check.

Press **Supplementary Work** on the main menu and then sub-menus will appear as in <Fig. 5.6.0-1>.



[Fig. 5.6.0-1]

- **Position** : It shows whether the called design contacts the X, Y limits without actually carrying out embroidery work.
- **Gauge** : It automatically generates gauges for the embroidery outline in accordance with the values set in “14. Distance between embroidery outline and gauge line” under “Embroidery parameter setting”.
- **Exclude** : It is used to embroider the outline of the called design.
- **Fastview** : It virtually shows the embroidery work for each stitch to display the progressing direction of the design or the stage of color changes.
- **Trace** : It briefly checks whether the frame moves beyond the X, Y limits, if the embroidery work begins from the current position of the frame.

5.6.1 Position

This function is to set the desired position to begin embroidery.

- ① Select the work position in <Fig. 5.6.0-1>, and then <Fig. 5.6.1-1> will appear.



- ② Green line inside of an embroidery frame of <Figure 5.5.1-1> is the maximum size(wide and long) of the embroidery design. The '+' sign inside of the green line indicates the starting point and the embroidery frame position to embroider.
- ③ The embroidery design goes to the embroidery frame position when pressing a direction button inside of the frame. If there is a red part on the red line to indicate the embroidery design, limit error of X and Y occurs during operation.
Therefore, select the position to display the green line inside of the embroidery frame.


[Caution]

When the main power is off, and the frame is pushed by hand, the frame's origin will change. Likewise, when the frame's origin is changed, the work position function does not properly perform. (For frame's origin, see "5.5.5 (4)Frame's Origin.")


5.6.2 Gauge

This function is to automatically create the gauge of the design outline.

- ① Use the menu move buttons in <Fig. 5.6.0-1>, select gauge, and press **SET**. And then <Fig. 5.6.2-1> will appear.

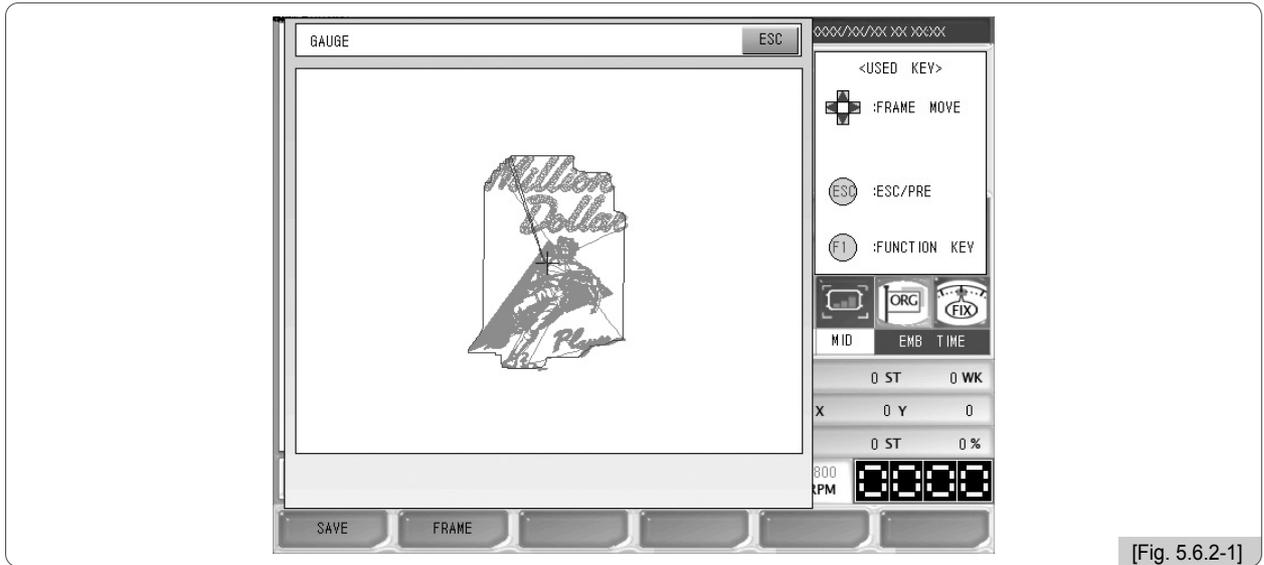

- ② Press **F1 SAVE** in <Fig. 5.6.2-1>, and as in <Fig. 5.6.2-2>, the menu for design save will appear. Select the room to save the design and press **F1 COPY**, and the design will be saved in the memory. To cancel the saving, press **F2 CANCEL**.

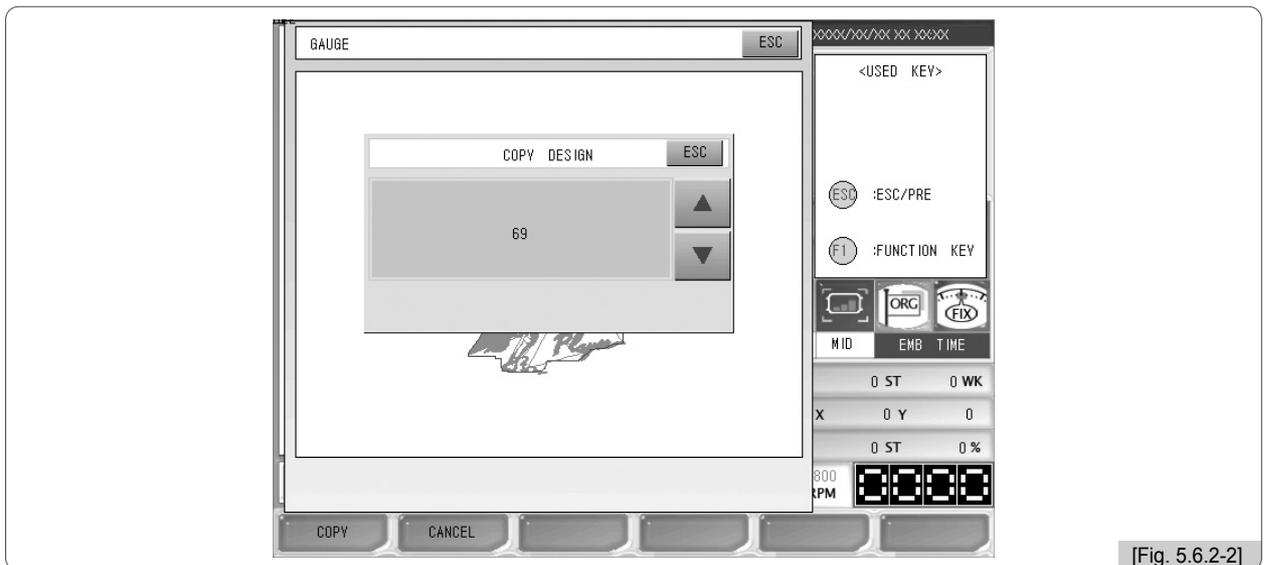

[Note]


The distance between the called design and the gauge line can be set in “14. Distance between design outline and gauge line” of “5.4.2 Embroidery Parameter Setting.”

F2 FRAME in <Fig. 5.6.2-1> is the function to check whether the gauge line moves beyond the frame by moving the frame along the gauge line.

5.6.3 Exclude


This function is to embroider the outline of the called design.

- ① Use the menu move buttons in <Fig. 5.6.0-1> to select Outline and press **SET**. And <Fig. 5.6.3-1> will appear.

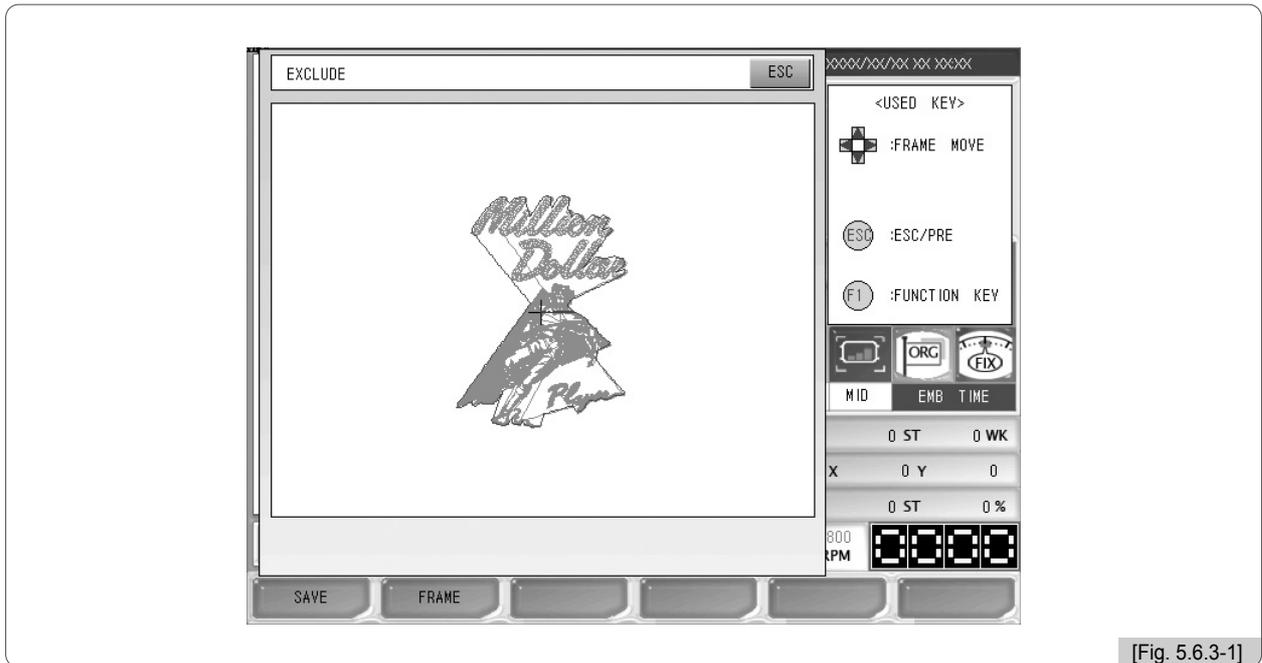

[Fig. 5.6.3-1]

- ② Press **F1 SAVE** in <Fig. 5.6.3-1>, and then the menu for design saving will appear as in <Fig. 5.6.3-2>. Select the room for design saving and press **F1 COPY**. Then the design will be saved in the memory. To cancel the saving, press **F2 CANCEL**.

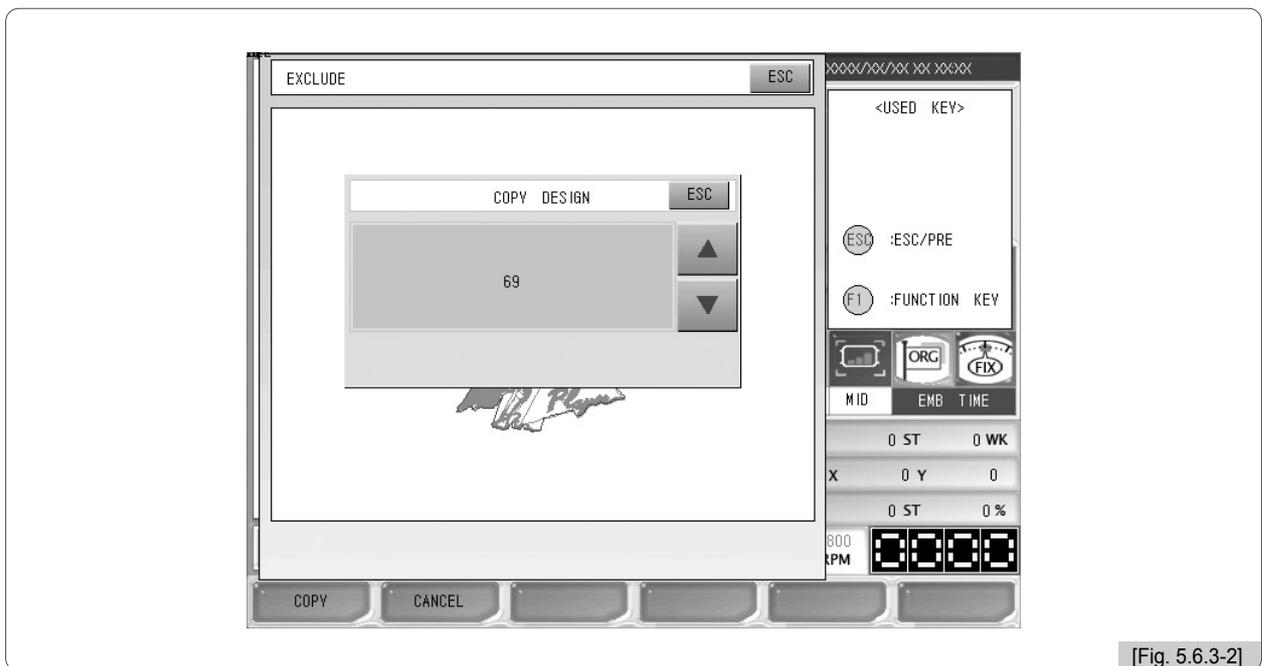


[Fig. 5.6.3-2]

F2 FRAME in <Fig. 5.6.3-1> is the function aimed to check whether the frame moves beyond the outline by moving the frame along the outline.


5.6.4 Fastview

This function is to show the virtual embroidery work for the chosen design. There are such sub-menus such as color, 100 stitches, 1000 stitches, slow view, and fast view.

<Fig. 5.6.4-1> is the screen when “Route Check” is pressed in <Fig. 5.6.0-1>.

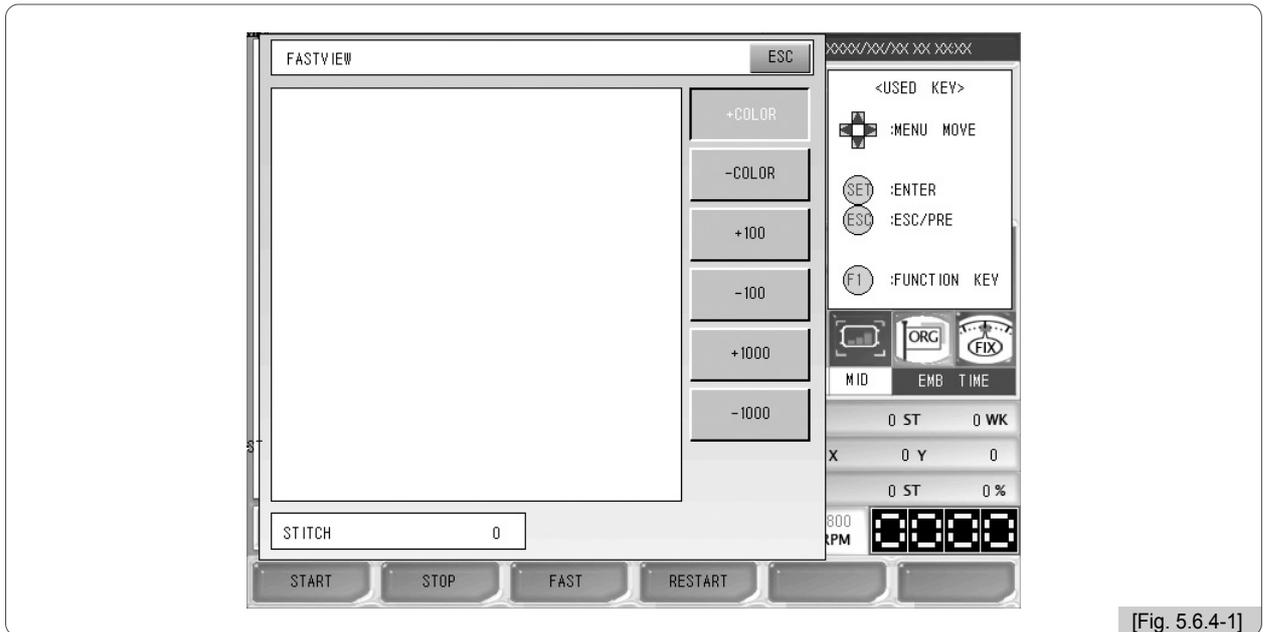

As in <Fig. 5.6.4-2>, the embroidery work for the chosen design is displayed one stitch at a time. This shows the procedures of producing the entire design.

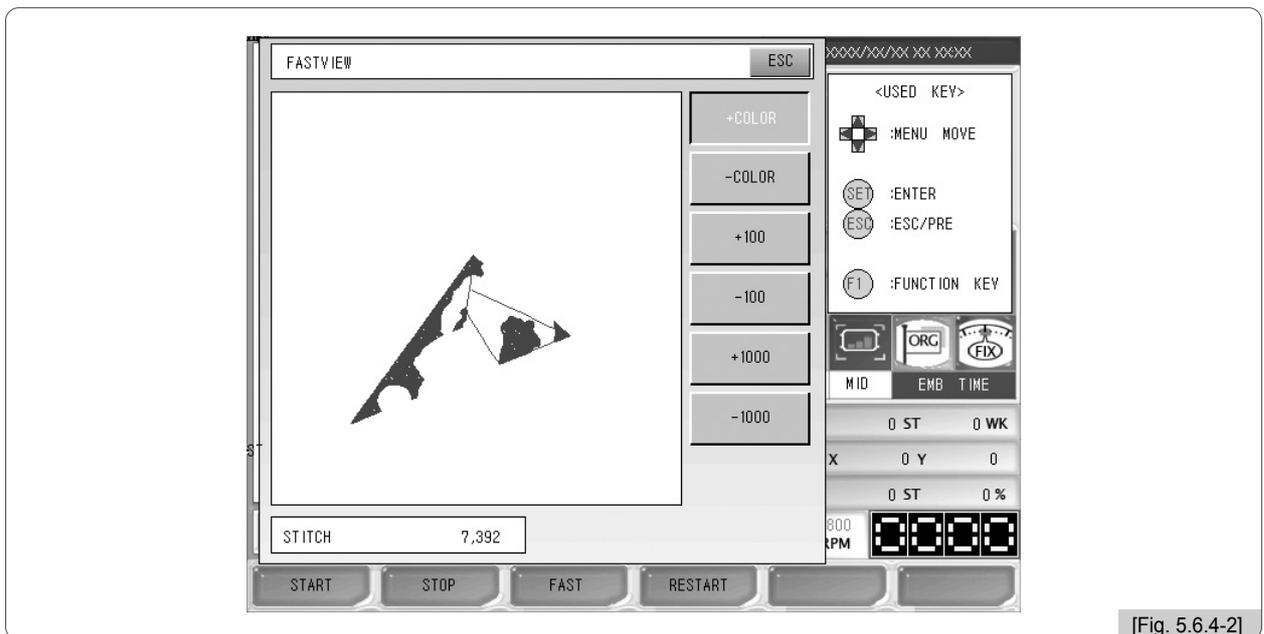

- The following is the description for each button.

 : Ends the route check function.

 + Color : Shows the increase of stitches until the next color.

 - Color : Shows the decrease of stitches until the previous color.

 + 100 : Shows the design after adding 100 stitches each time .

 - 100 : Shows the design after subtracting 100 stitches each time.

 + 1000 : Shows the design after adding 1000 stitches each time.

 - 1000 : Shows the design after subtracting 1000 stitches.


 **F1 START** : Press this button after selecting High speed or Low speed. And then, the embroidery work virtually begins on the screen.

 **F2 STOP** : Stops the display work when pressed while the drawing is in progress.

 **F3 FAST** : Displays the design embroidery at faster or slower speed on the screen. When Fast is seen on the button, it means that low speed function is set. When the slow button is pressed to set it as high speed, the button name will be changed to Slow. This is the condition where high speed function is set. If the button is pressed once again, Fast appears on the button again, and the slow mode comes back.


 **F4 RESTART** : Initializes the screen where virtual embroidery is being conducted.

The following screens show the embroidery by color after pressing **+COLOR** for #35 Room. This design has 17 color change codes. The following screens show 9 steps of embroidery work.

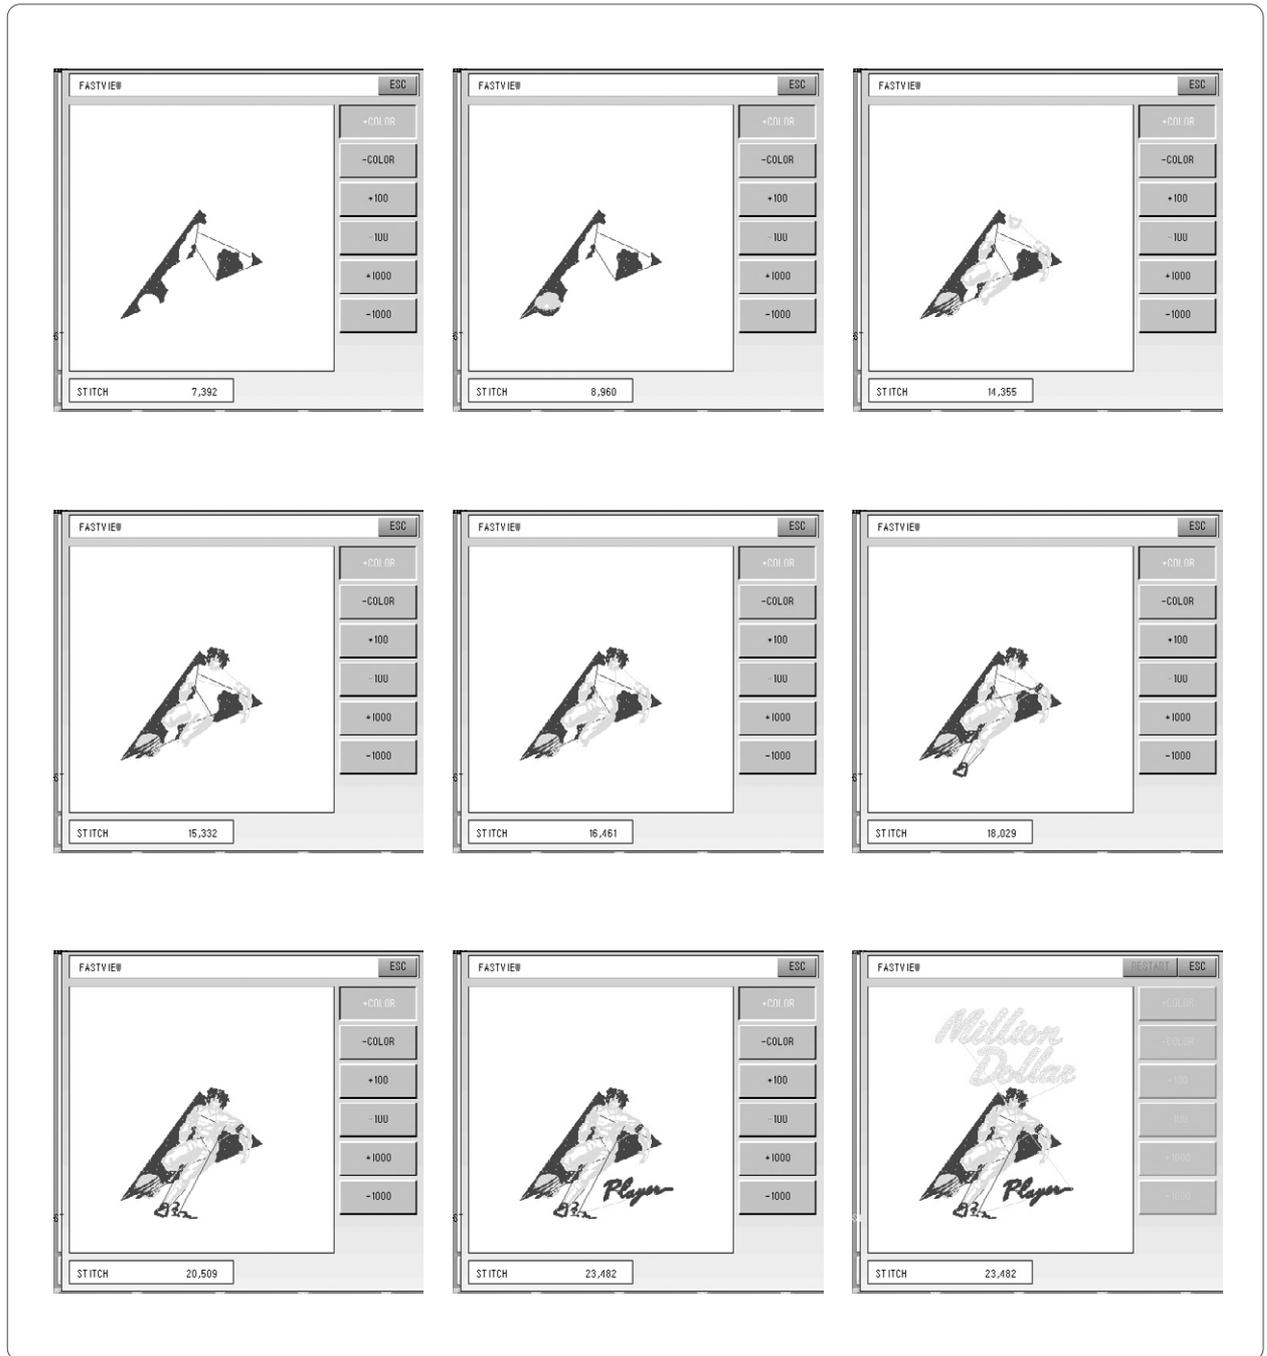

5.6.5 Trace

- ① This function is to briefly check whether the design size goes beyond the X, Y limits, if the embroidery of chosen design begins from the current frame position.

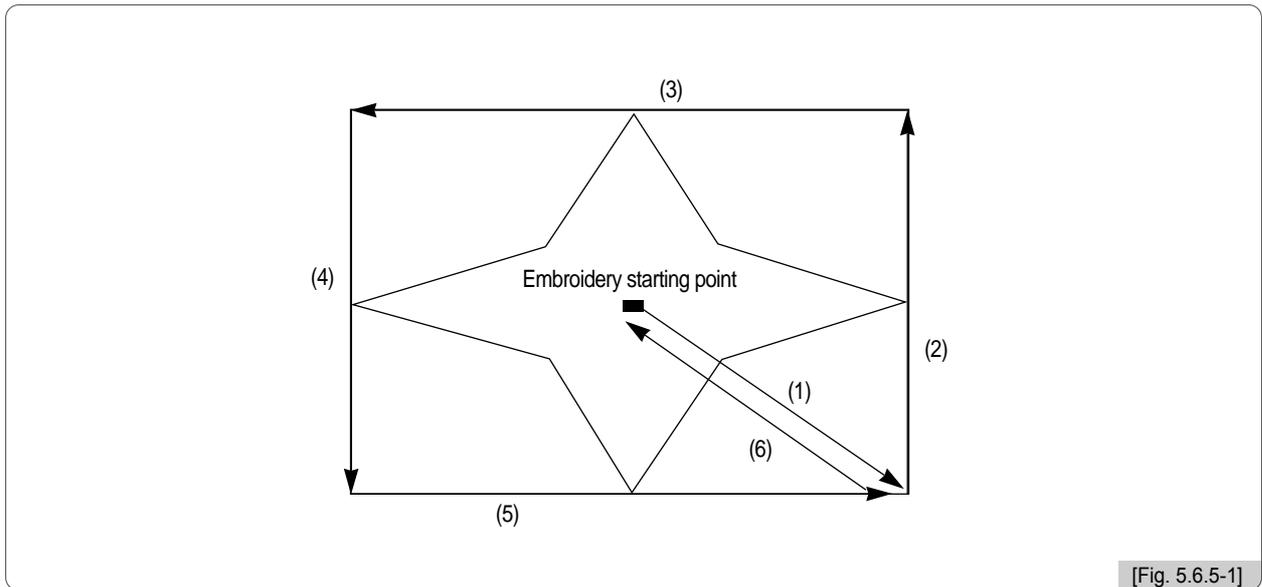


- ② The arrow marks in <Fig. 5.6.5-1> show the feed route of the frame. While the frame moves fast between the maximum X,Y range and the minimum X,Y range, the function checks whether the design goes beyond the frame limits. If so, the frame operation will be stopped, and the message "Frame Limit Error" will appear on the screen.

5.7.0 Design



- The design menu supports the consecutive work function and the design edit function.

<Fig. 5.7.0-1> will appear when **F6** DESIGN is pressed on the main function menu.

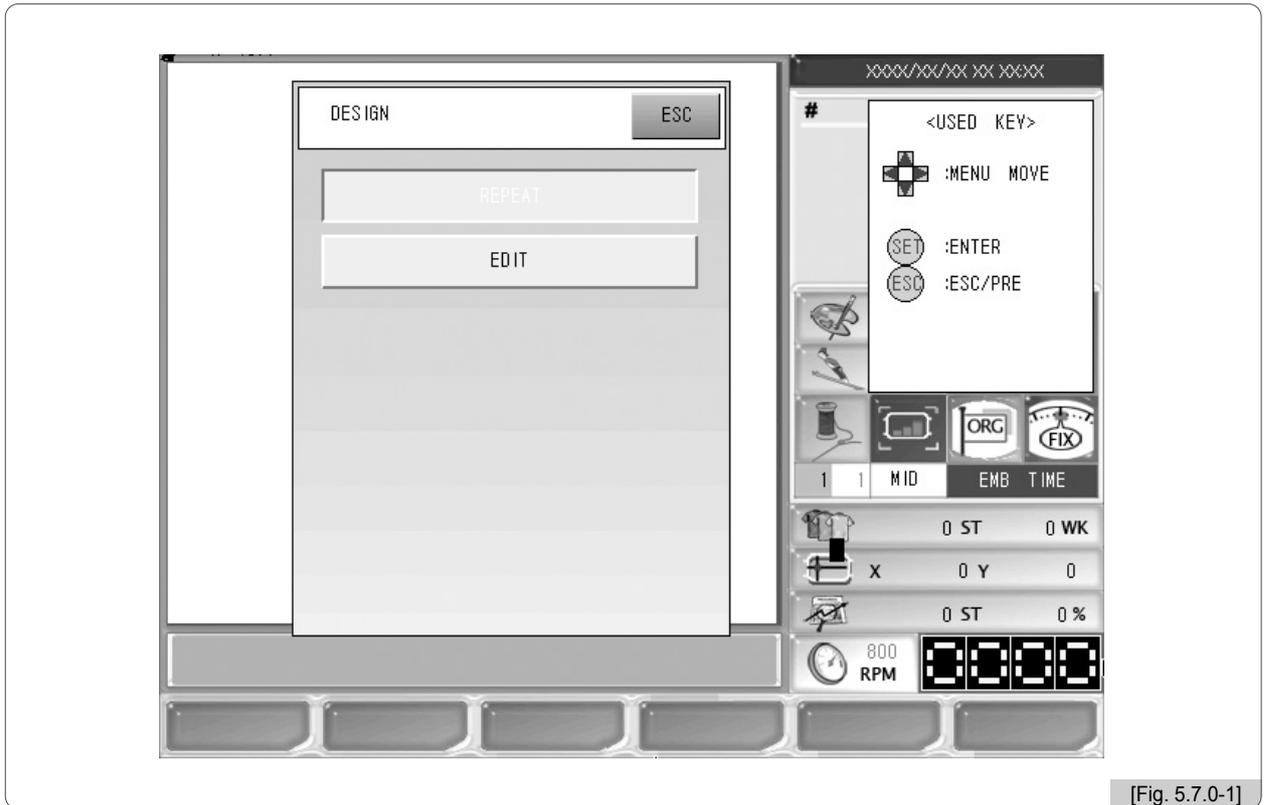


[Fig. 5.7.0-1]

- Repeat : It uses the same embroidery designs consecutively.
- Edit : It is used to edit designs.

5.7.1 Repeat

This function is to embroider a single or various designs within one frame consecutively at the same time.

<Fig. 5.7.1-1> appears when Consecutive Work is selected in <Fig. 5.7.0-1>.

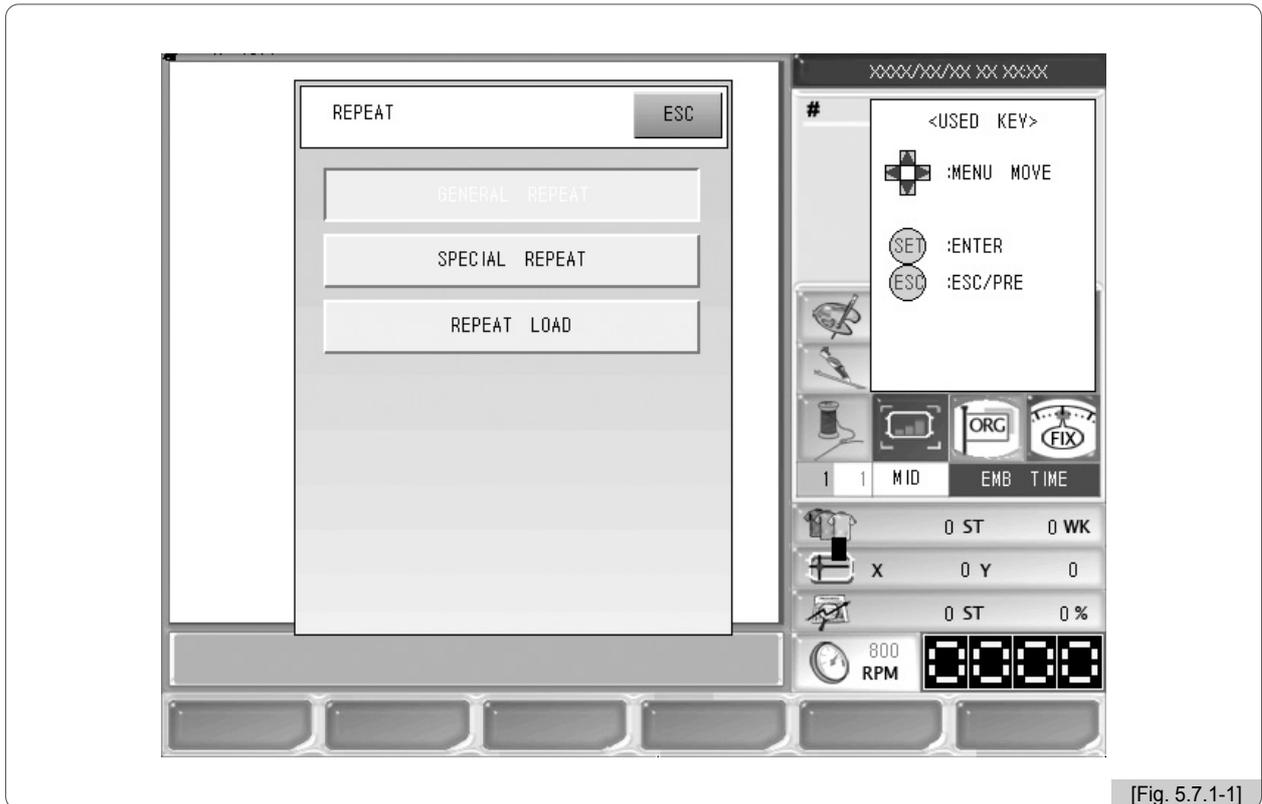

[Fig. 5.7.1-1]


- **General Repeat** : It can embroider a single design called consecutively up to 99 times horizontally and vertically.
- **Special Repeat** : It calls various designs saved in the memory and supports up to 64 times of consecutive work. Angle, X-axis reverse, enlargement, reduction and other various editings can be freely made.
- **Repeat Load** : It calls out the consecutive work saved in the memory.

(1) General Repeat

This function is to embroider one design repeatedly along the X and Y axes.

<Fig. 5.7.1-2> will appear when General Consecutive is selected in <Fig. 5.7.1-1>.

Use the menu move key and press **SET** for making a choice. If the setting is undesired, press **ESC**.

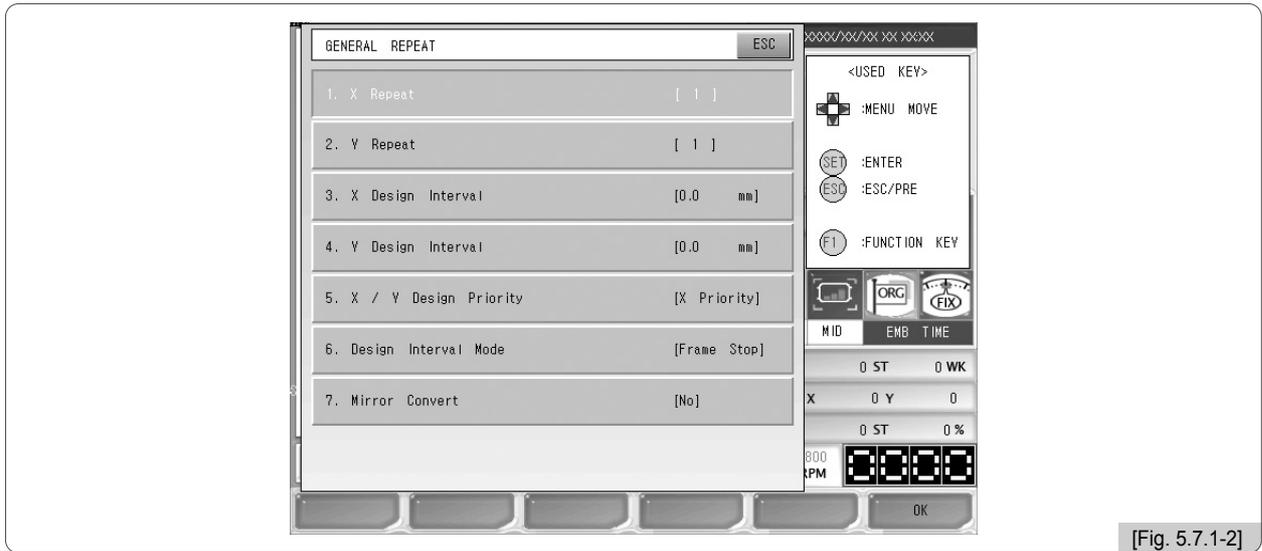

[Fig. 5.7.1-2]

① X Repeat : Sets the number of repetitions along the X axis. The range of repetition settings is from 1 to 99 times.


② Y Repeat : Sets the number of repetition along the Y axis. The range of repetition settings is from 1 to 99 times.

[Note]

The range of repetition setting [(X repetition frequency) × (Y repetition frequency)] shall be smaller than 99.


③ X Design Interval : It sets the distances between the starting points of the repeated design along the X axis. The signs of move (+ / -) determines the direction of repetition.

- ┌ + : Repeat in the right direction
- └ - : Repeat in the left direction


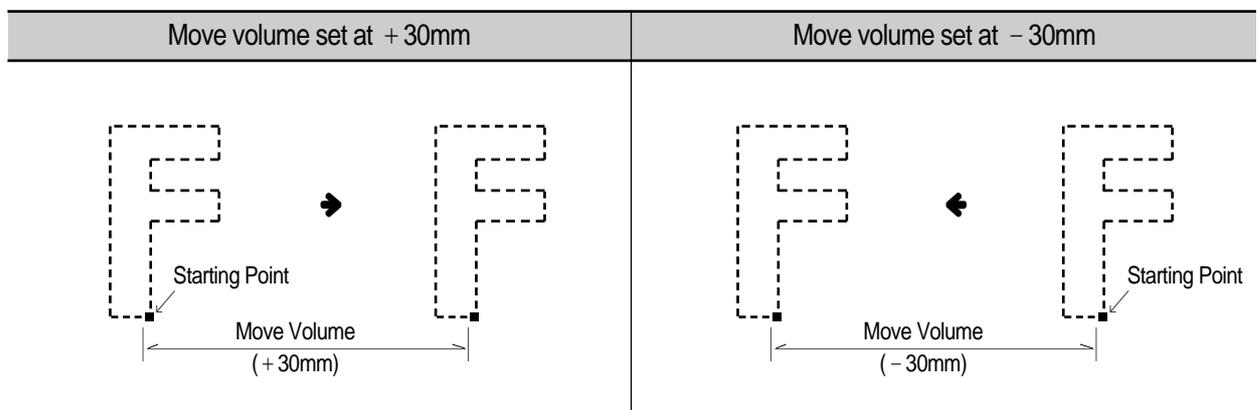


④ **Y Design Interval** : It sets the distances between the starting points of the repeated design along the Y axis.
The signs of move(+ / -) determines the direction of repetition.

- ┌ + : Repeat in the right direction
- └ - : Repeat in the left direction

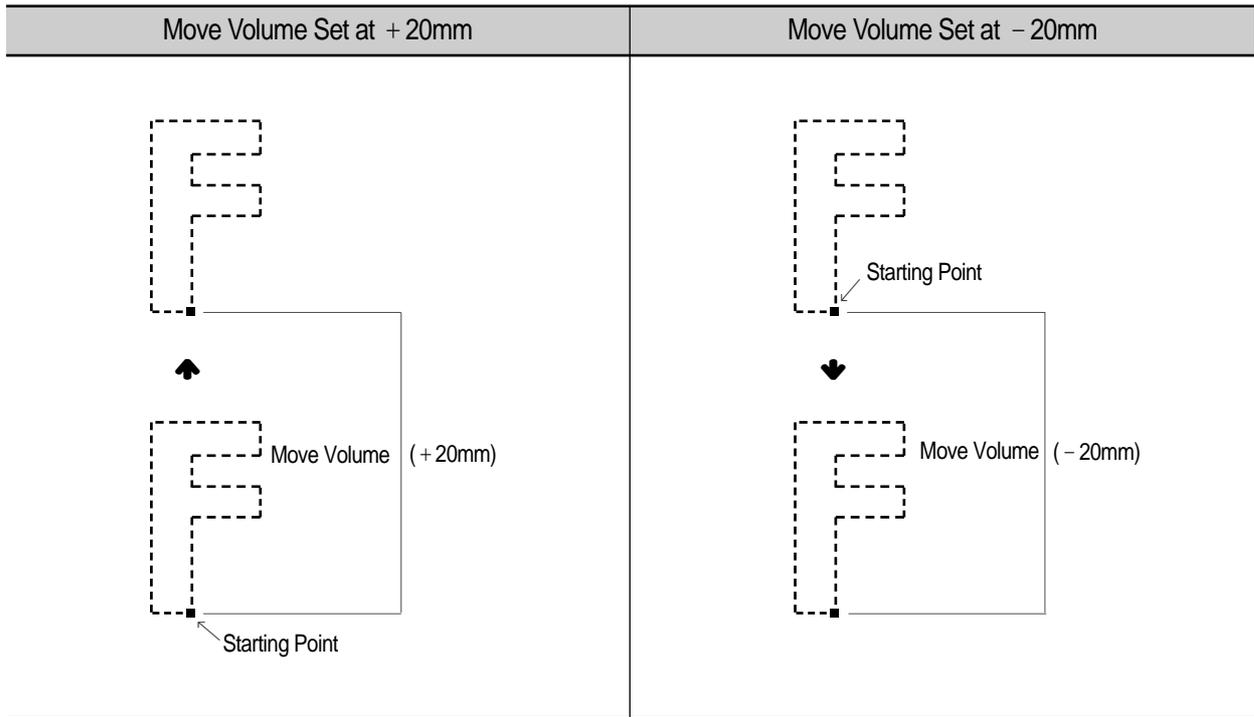


⑤ **X/Y Design Priority** : It determines the priority in the X or Y direction.
In <Fig. 5.7.1-3>, the X direction is priority. In <Fig. 5.7.1-4>, the Y direction is priority.

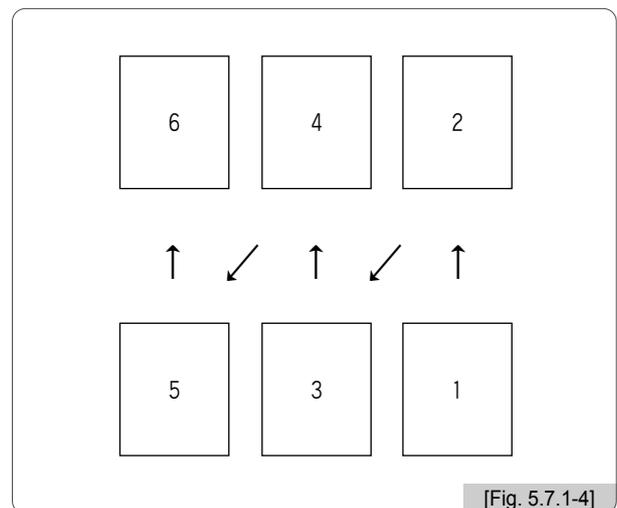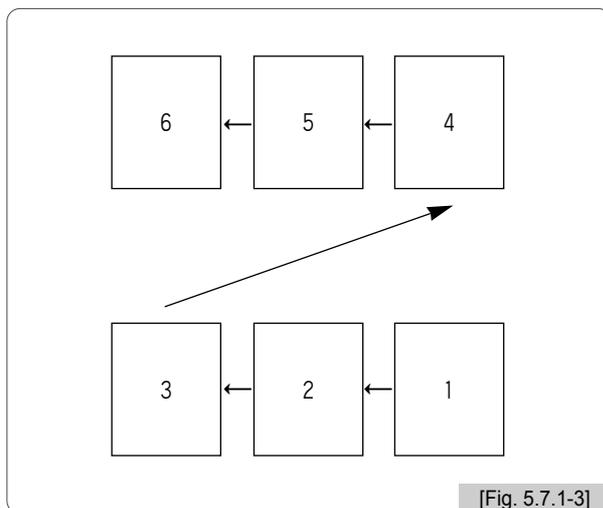

⑥ **Design Interval Mode** : This function is to set the moving methods between repeated designs. To move a design, Stop Code and Jump Code can be used.

- ┌ Stop code : It moves to the position of the next design and stops.
- └ Jump code : It moves to the position of the next design and automatically begins work.

⑦ Mirror Convert : This function is to set the design to look like the one reflected on the mirror.

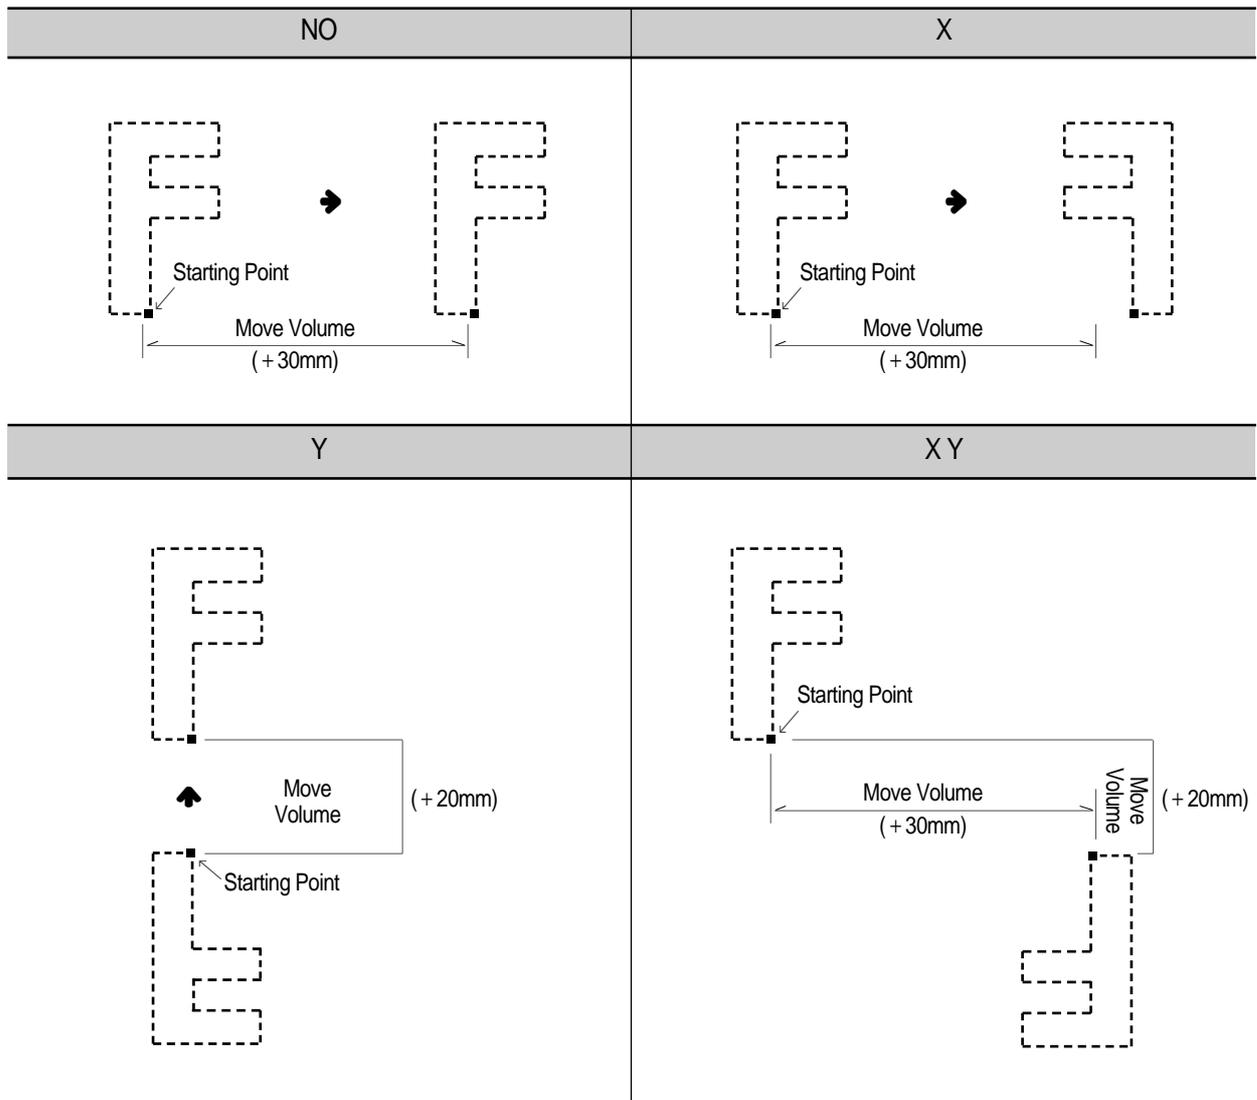

When entering the values as below, the following settings will be made.

Value	Setting
0	NO
1	X
2	Y
3	X_Y

[Exercise 5.7.1-1] Call No. 35 design, conduct the following consecutive work, and save it.

- X-axis repetition : 3
- Y-axis repetition : 3
- X-axis design gap : 200 mm
- Y-axis design gap : - 200 mm
- X/Y design priority : Y first
- Design move method : Jump code
- Reverse effect : Normal
- Save method : Data saving

① Call No. 35 design.


(For design call, refer to “5.2 Design Call”.)

② Press **F6 DESIGN** on the main function menu, select Consecutive Work, and then <Fig. 5.7.1-1> appears. If General Consecutive is selected, <Fig. 5.7.1-2> will appear.

③ Press “1. X Repeat”

<Fig. 5.7.1-5> will appear for setting.

④ Use the number buttons to press “3” and then press **SET**.

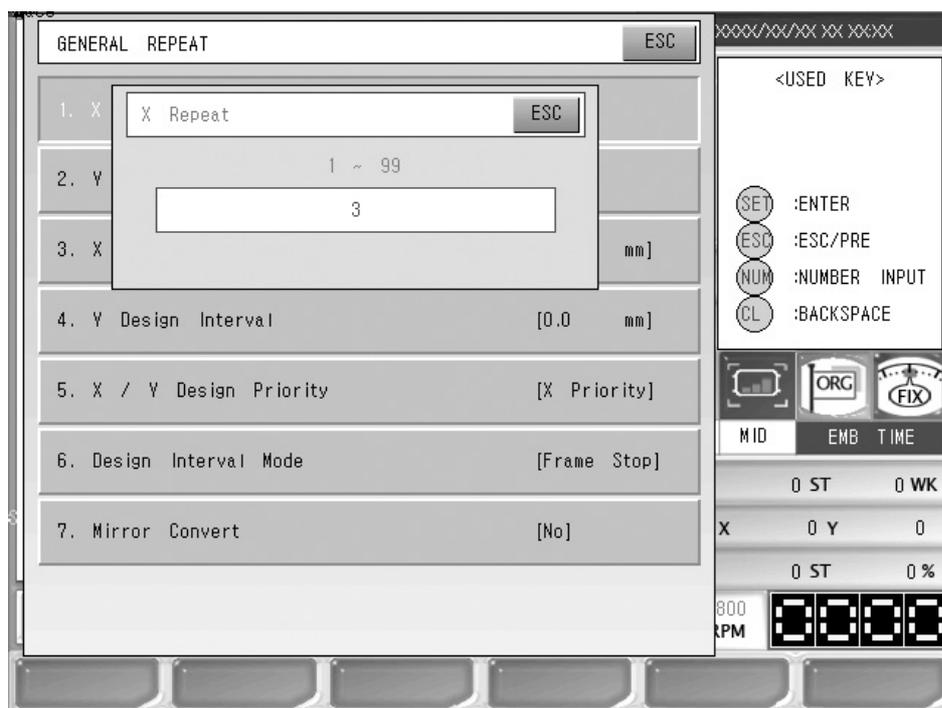


[Fig. 5.7.1-5]

5 Press "2. Y Repeat".

<Fig. 5.7.1-6> will appear for setting.


6 Use the number buttons to press "3" and then press **SET**.

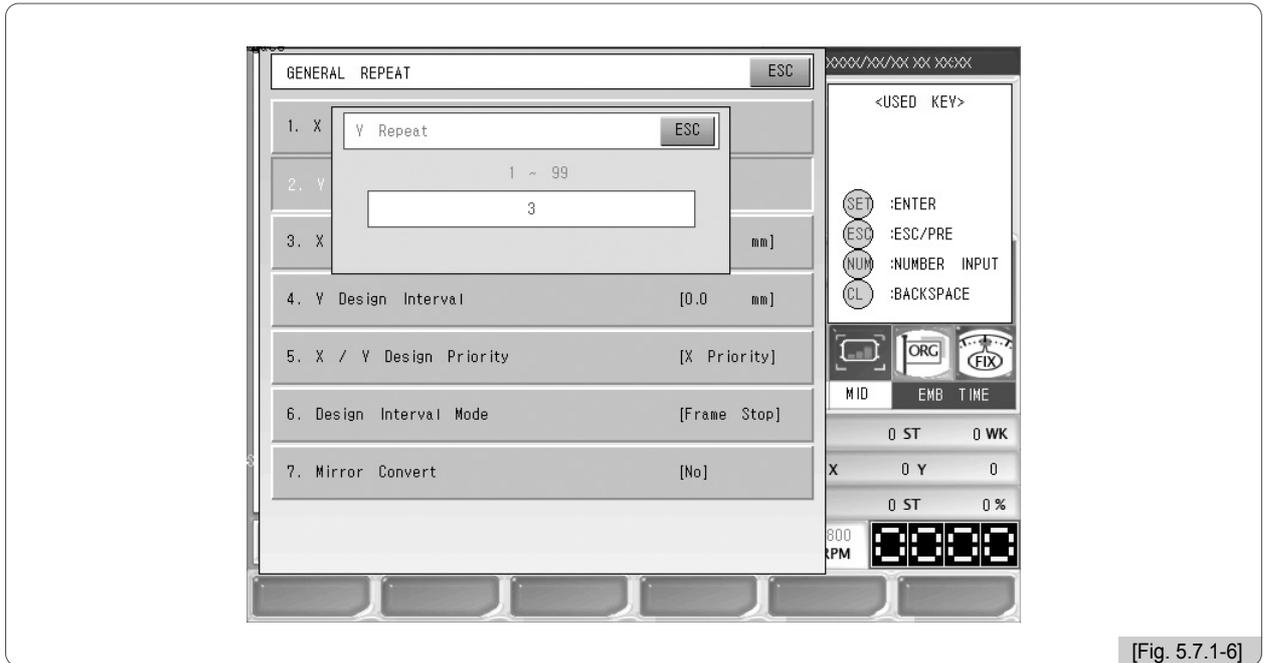

7 "3. X Design Interval".


<Fig. 5.7.1-7> appears for setting.

8 Press 200 by using the number buttons, and press **SET**.

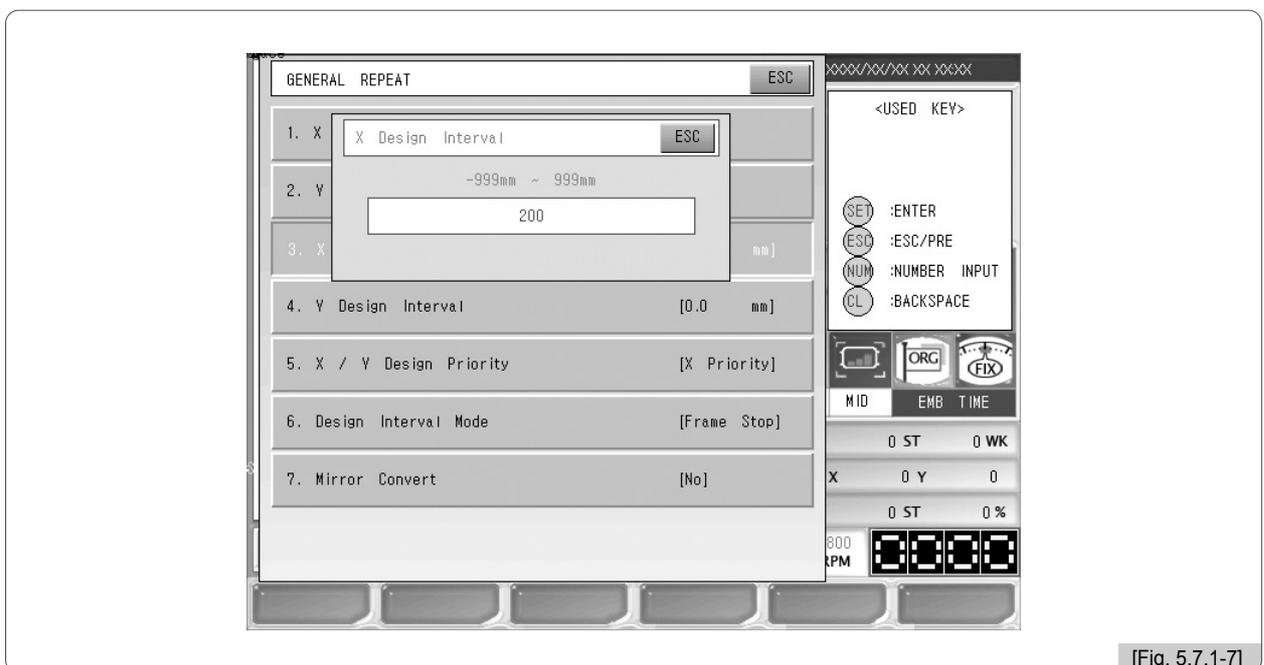

- 9 Press "4. Y Design Interval".
<Fig. 5.7.1-8> will appear for setting.


- 10 Use the number buttons to enter "- 200" and press .

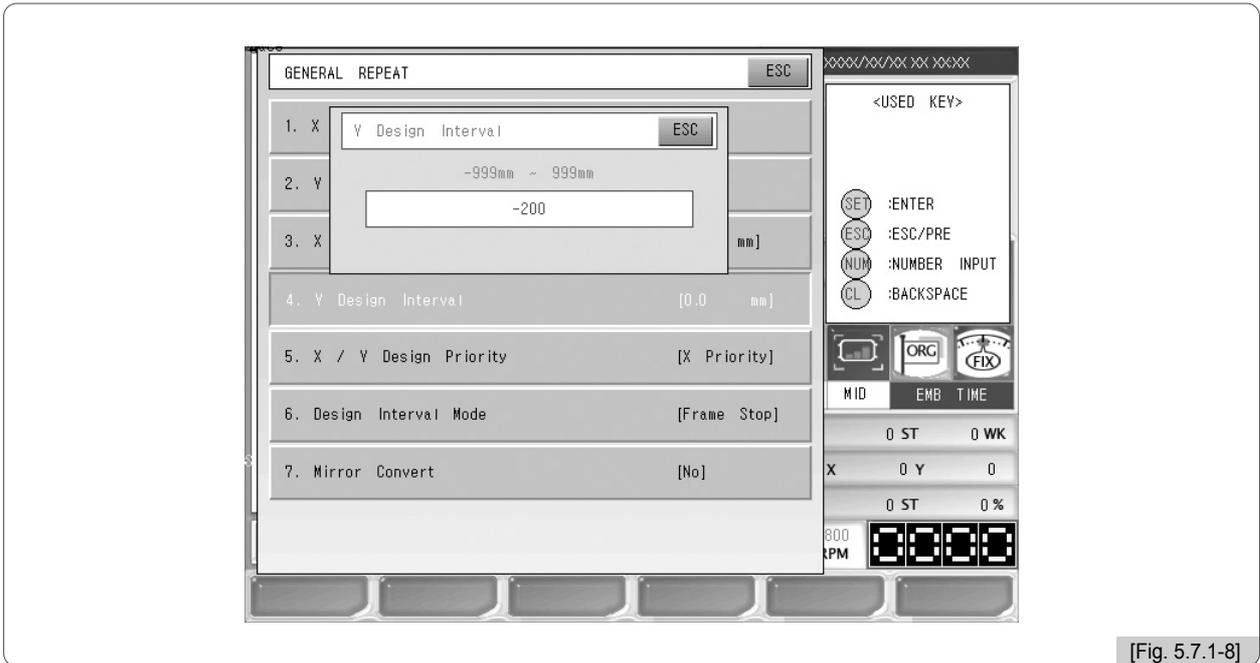

[Fig. 5.7.1-8]

- 11 Press "5. X/Y Design Priority".
<Fig. 5.7.1-9> will appear for setting.


- 12 Press 1 by using number buttons, and then press .

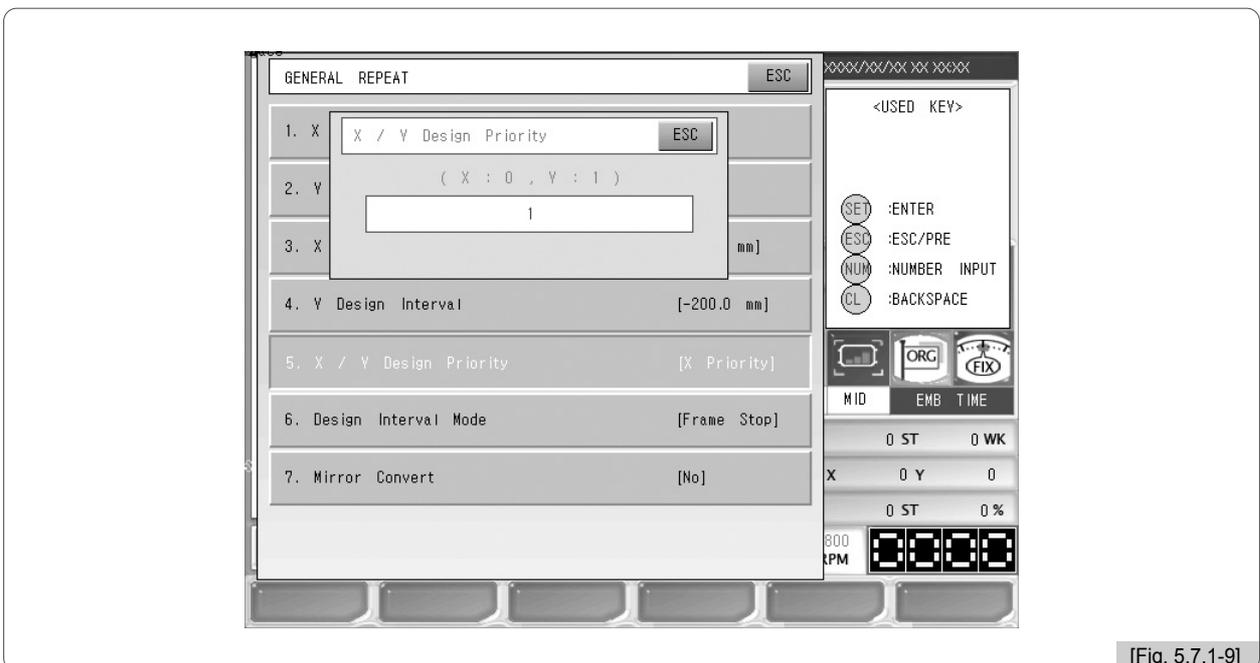

[Fig. 5.7.1-9]

- 13 Press "6. Design Interval Mode".
 <Fig. 5.7.1-10> will appear for setting.


- 14 Press 1 by using number buttons, and then press .

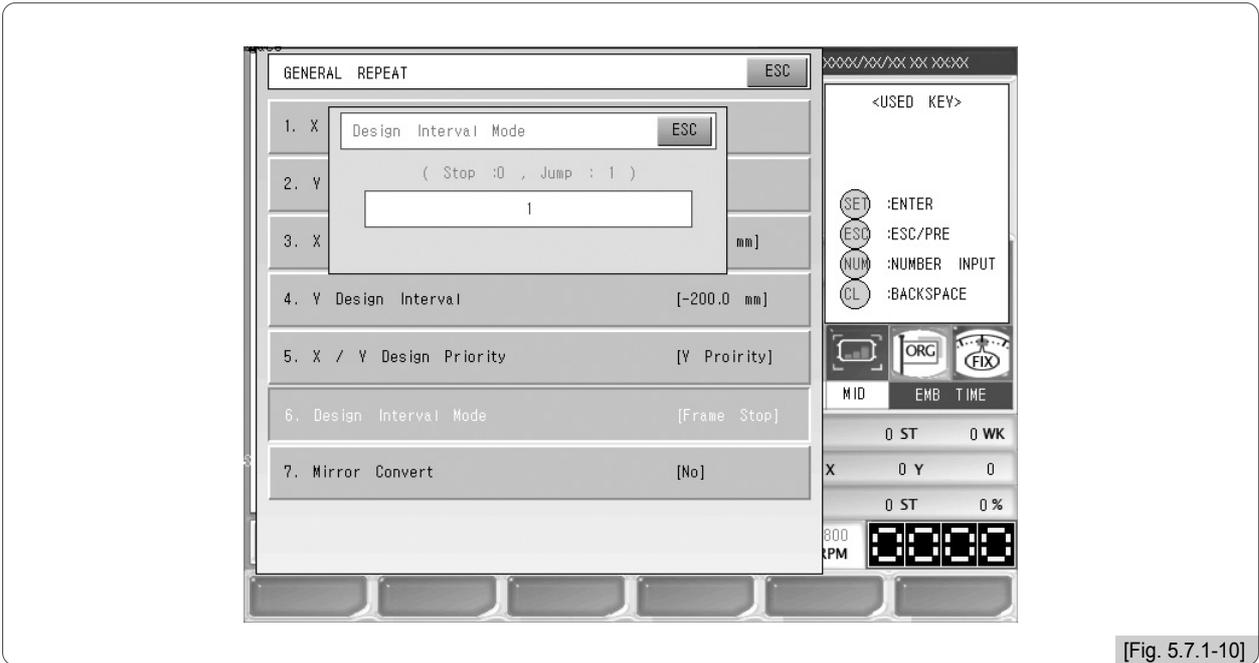

[Fig. 5.7.1-10]

- 15 Press "7. Mirror Convert".
 <Fig. 5.7.1-11> will appear for setting.


- 16 Press "0" by using the number buttons, and then press .
- (The default of 15, 16 is normal so that it is unnecessary to work on this exercise. However, it was described just for the purpose of showing an example.)

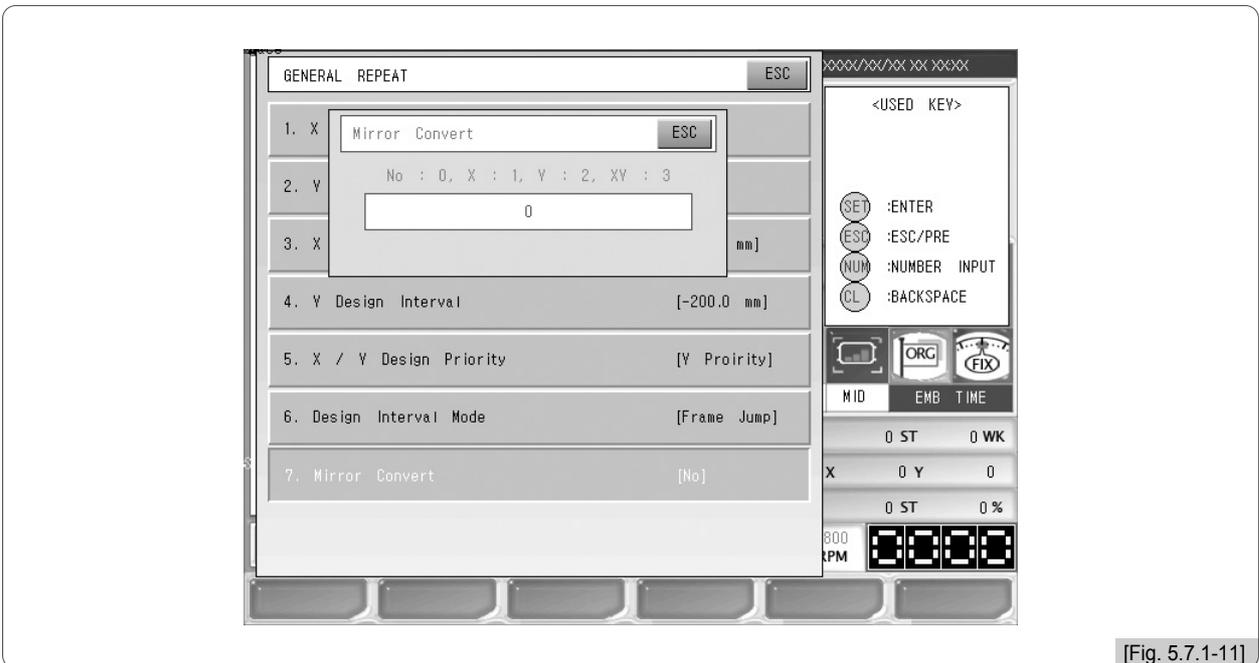

[Fig. 5.7.1-11]

17 Press **F6** **OK** Apply when all settings are completed.

<Fig. 5.7.1-12> is the screen when all the settings are completed.

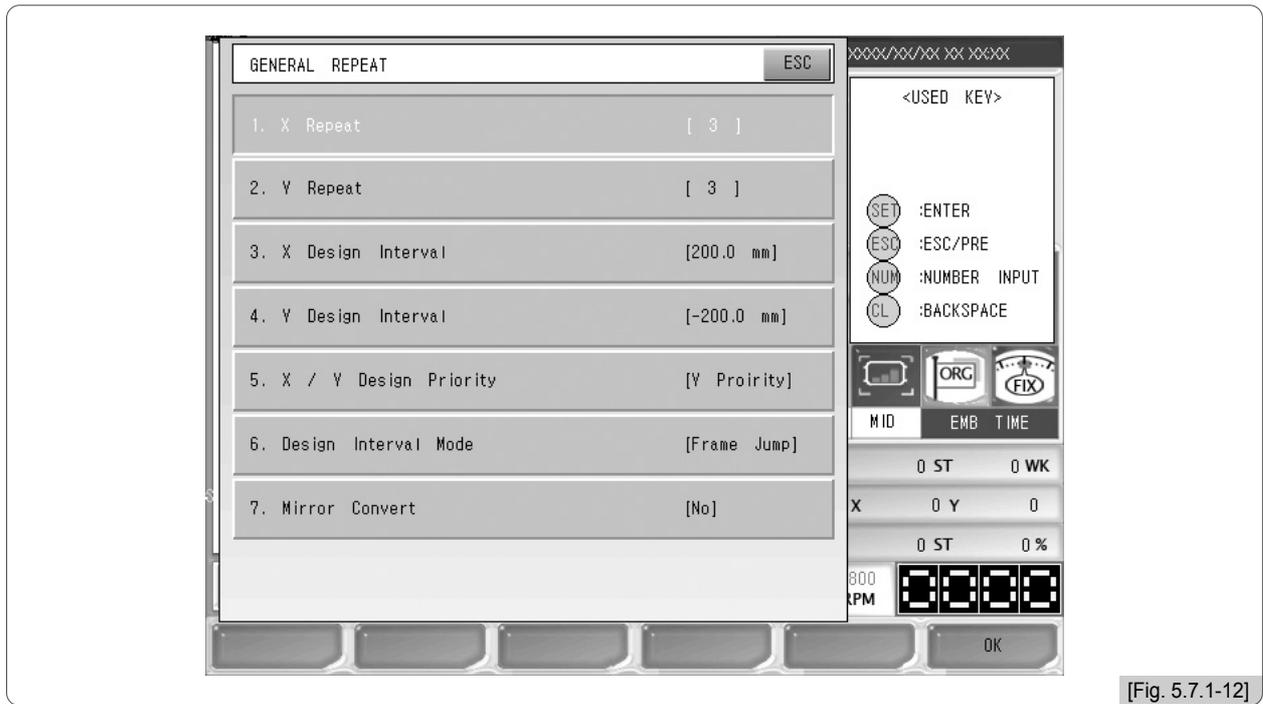


[Fig. 5.7.1-12]

<Fig. 5.7.1-13> is the screen asking for how to save repetition work.



[Fig. 5.7.1-13]

18 Press **F1** DATA .

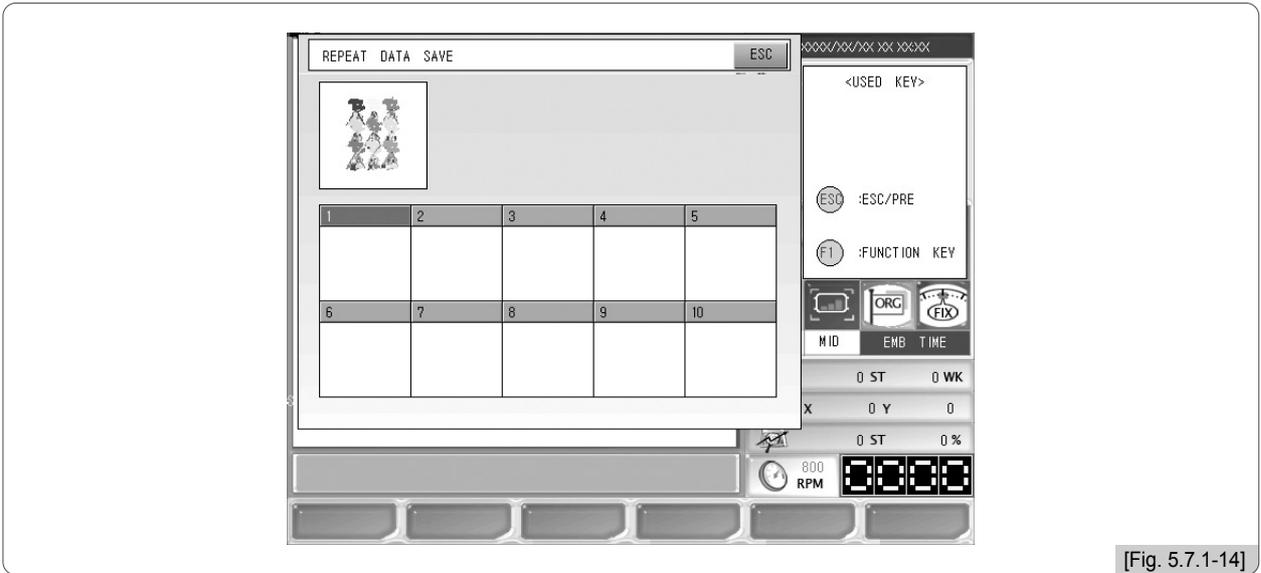


[Fig. 5.7.1-14]

<Fig. 5.7.1-14> is the screen where the room number for saving is selected. Currently, all ten rooms are empty.

19 Press "Section 1".

As in <Fig. 5.7.1-15>, the repeated work can be seen on the screen. If work repetition is set, the design call and supplementary functions cannot be used. The design button color will change to blue.

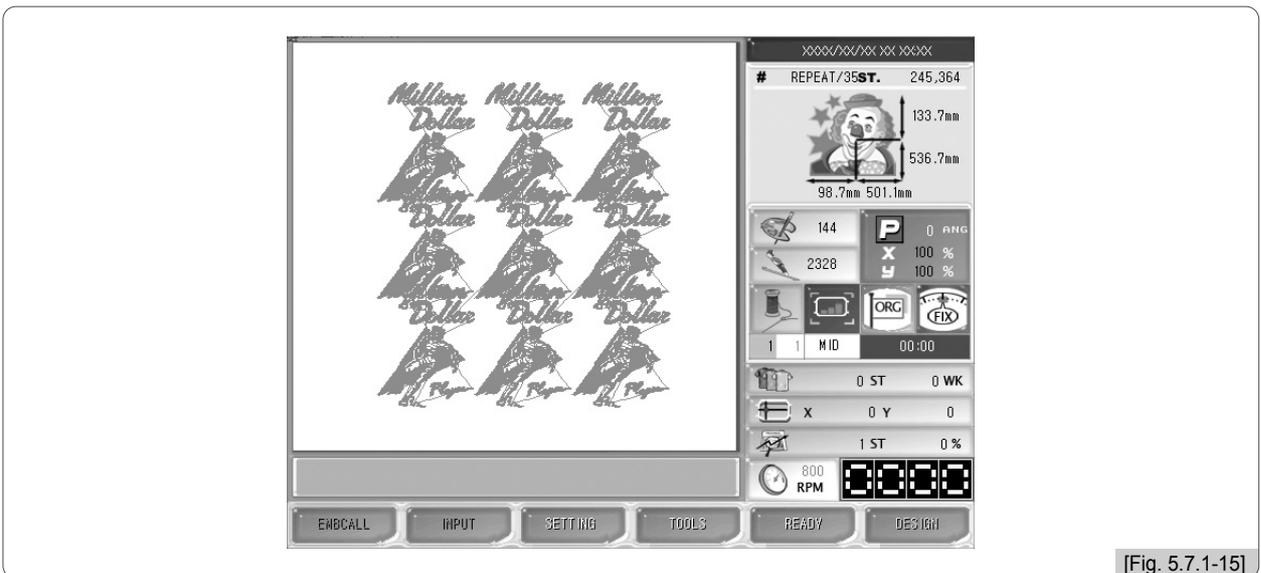

[Fig. 5.7.1-15]

[Note]

During consecutive work, the design call and input/output functions cannot be performed.

[Note]

When consecutive work is saved, it overwrites the existing consecutive work. Therefore, consecutive work is not necessary to be deleted.


[Exercise 5.7.1-2] Cancel the consecutive work setting

(Caution: This function is applicable only when consecutive work was previously set.)

- 1 Press **F6 DESIGN** which is printed in blue on the main function menu.

<Fig. 5.7.0-1> will appear, and then press **SET**.

- 2 <Fig. 5.7.1-16> will appear, and then press **SET**. This will cancel the consecutive work.

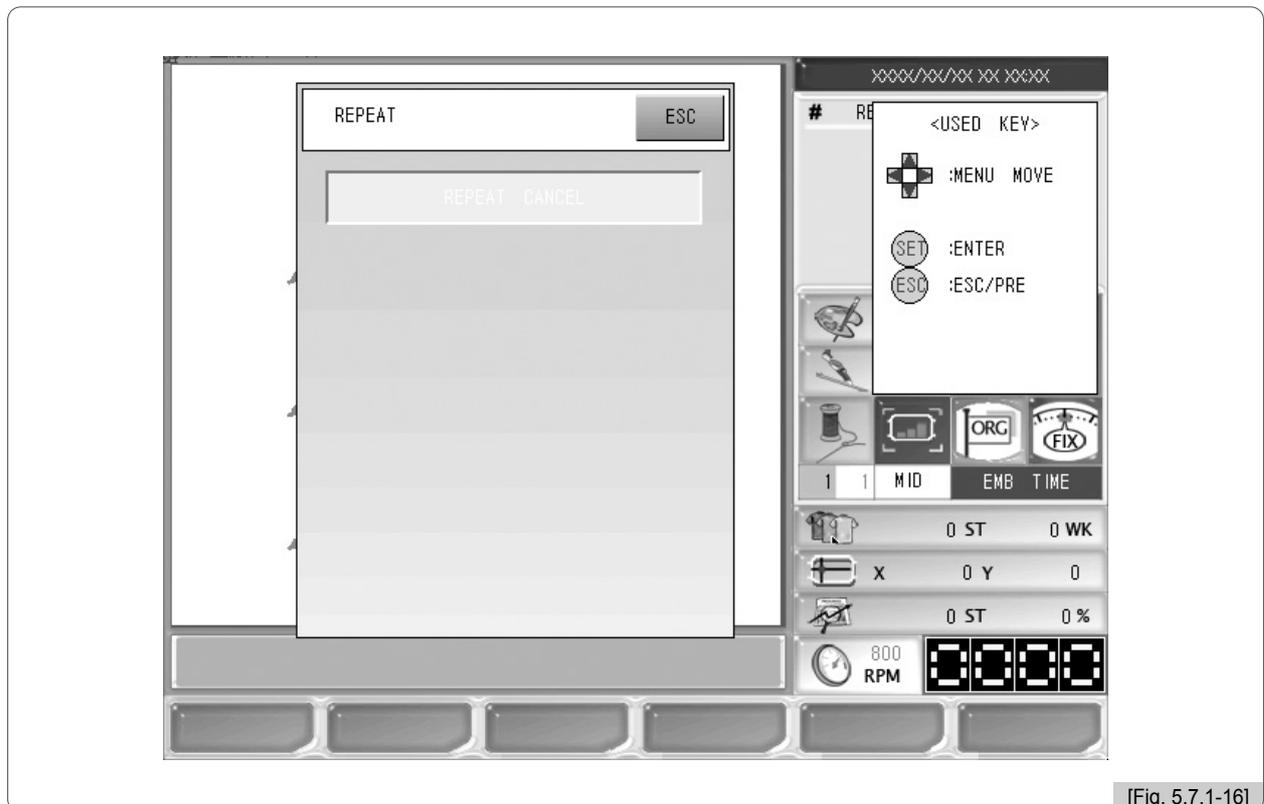


[Fig. 5.7.1-16]

(2) Special Repeat

This function is to synthesize designs. It can synthesize various designs saved in the memory and produce 64 types of design.

<Fig. 5.7.1-17> will appear when Special Consecutive is pressed in <Fig. 5.7.1-1>.


Eight designs can be set on one screen. To synthesize more designs, use the menu move key to go to the next screen.

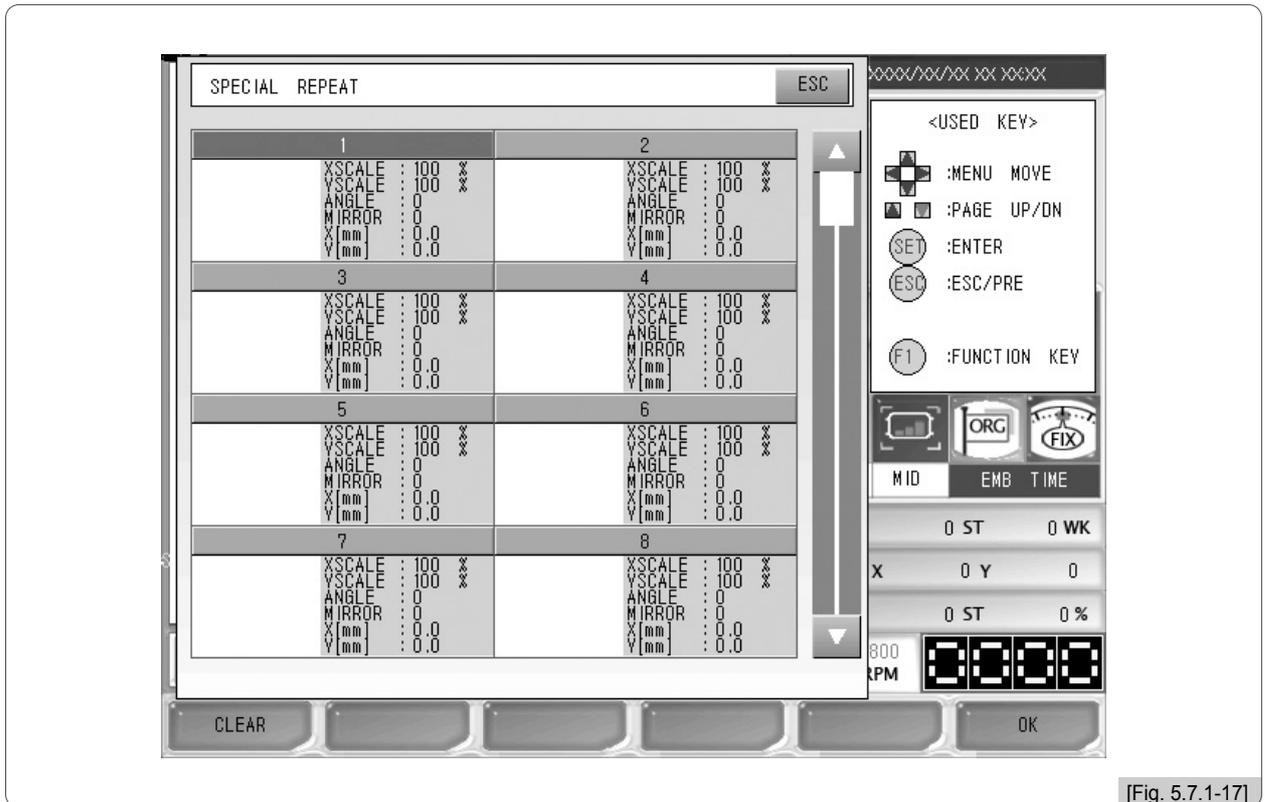

[Fig. 5.7.1-17]

[Exercise 5.7.1-1] Synthesize No. 51, No. 81 designs as in <Fig. 5.7.1-16> by using Special Consecutive function.


- No. 46 design: X_Scale 150%, Y_Scale 150%
- No. 81 design: X_Scale 200%, Y_Scale 200%

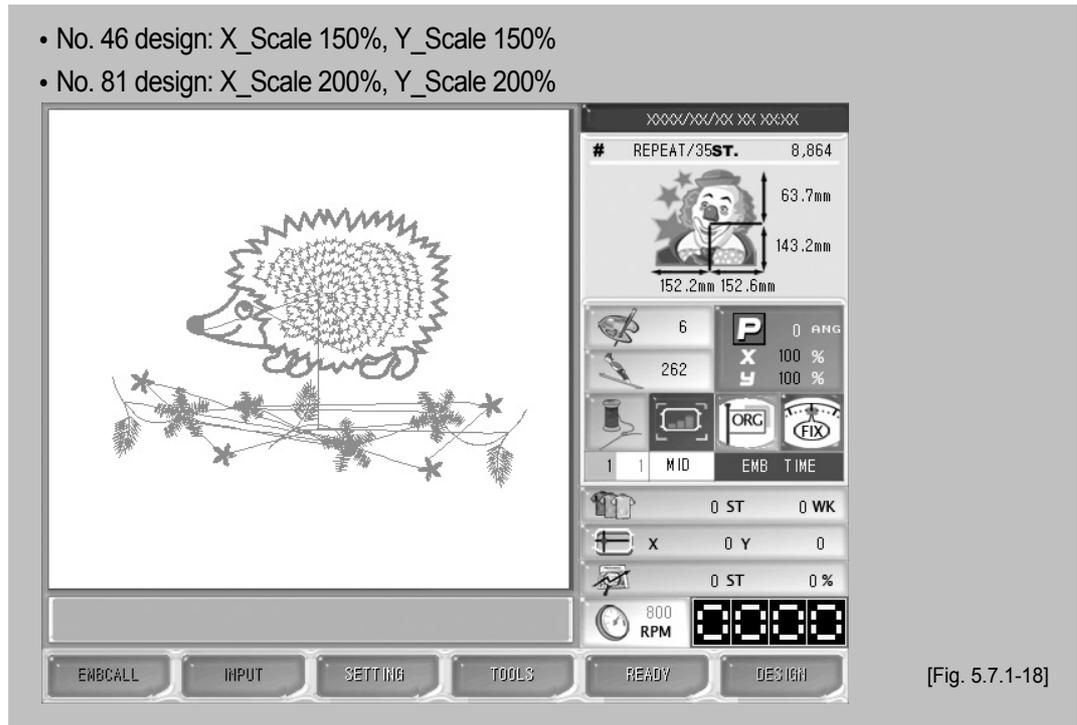

[Fig. 5.7.1-18]

① Press “Special Repeat” in <Fig. 5.7.1-1>.
Then, <Fig. 5.7.1-17> will appear.

② Use the menu move key in <Fig. 5.7.1-17>, select No. 1 section, and press .
<Fig. 5.7.1-19> will appear for setting.

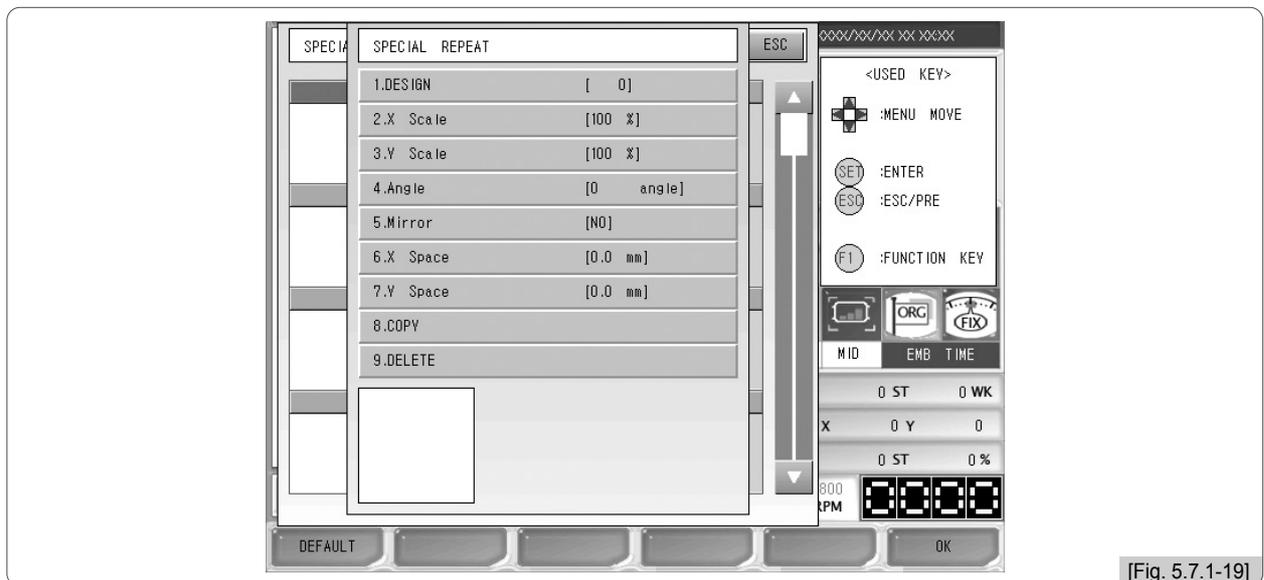


[Fig. 5.7.1-19]

③ Select “1. Design” in <Fig. 5.7.1-19>, and press .
The design call screen will appear.

④ Use the menu move key to move to No. 46 design.

Then, <Fig. 5.7.1-20> will appear.

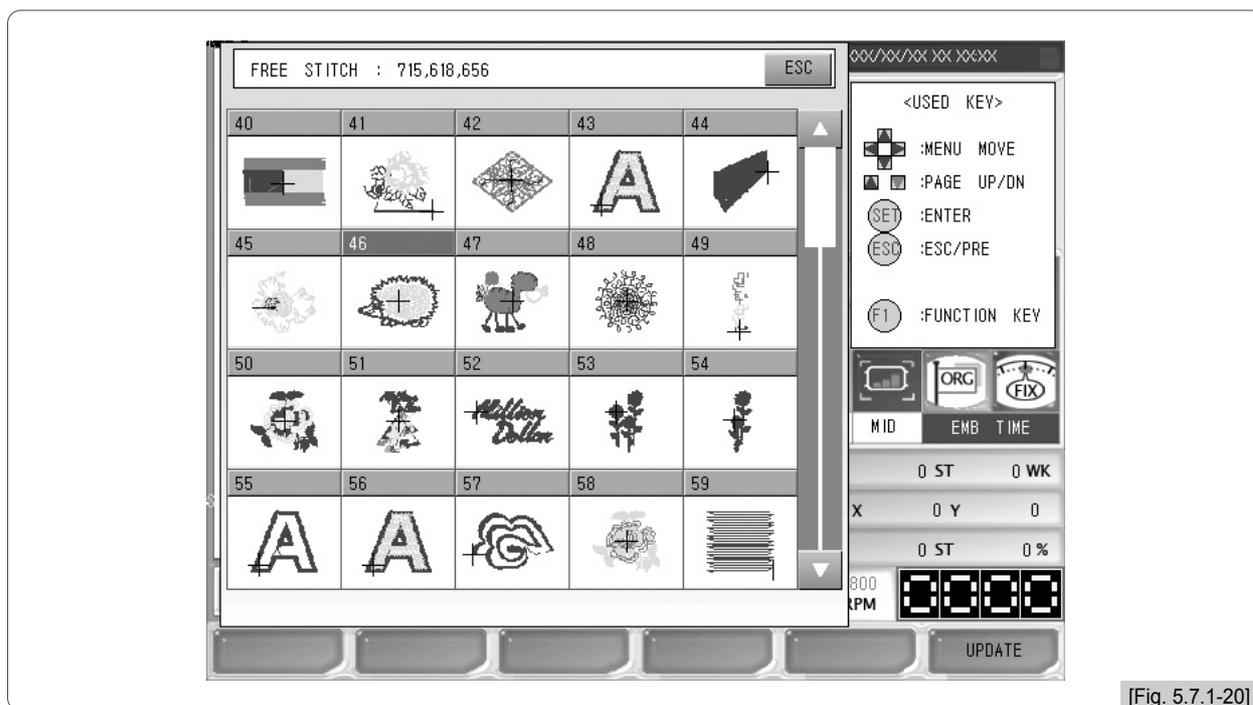


⑤ Use the menu move buttons in <Fig. 5.7.1-20> to go to No. 46 design, and press **SET**.

⑥ In <Fig. 5.7.1-19>, press “2. X Scale”.

Then, <Fig. 5.7.1-21> will appear.

Enter “150” by using the number buttons and press **SET**.

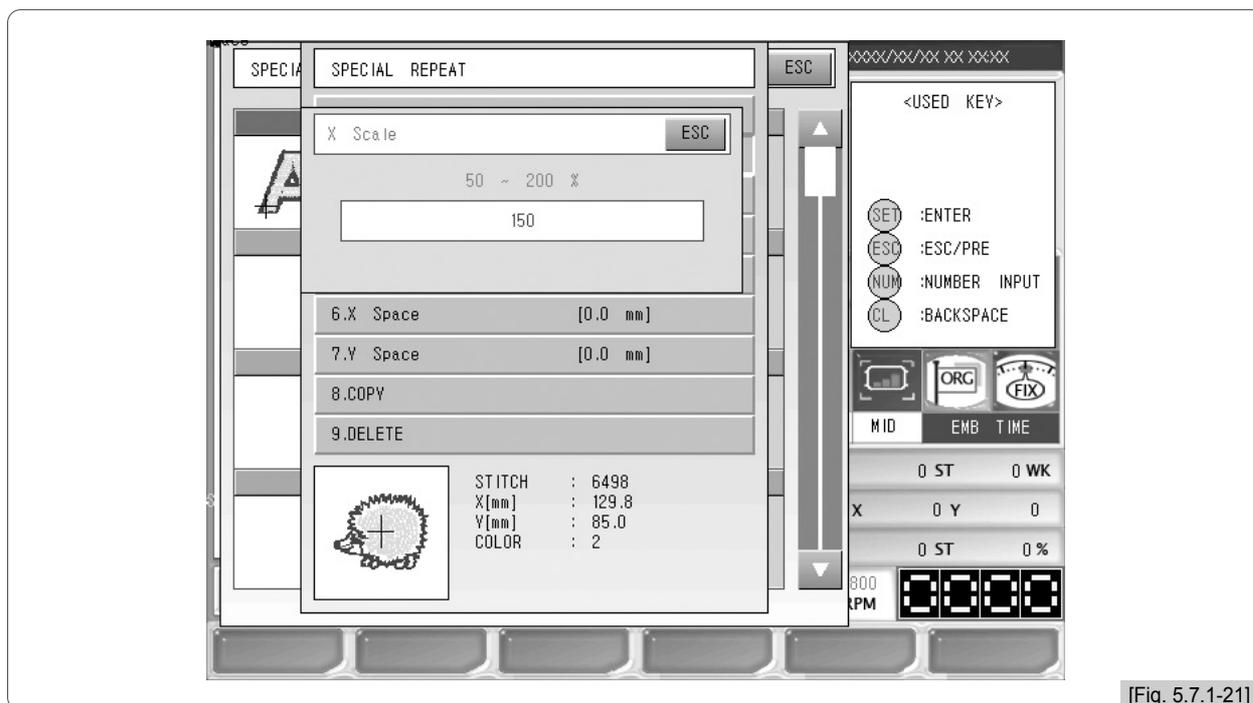


- ⑦ Select “3. Y Scale” and enter “150”.
(For “4. Angle”, “5. Mirror”, their settings shall be left as default.)
- ⑧ For “6. X Space”, set the value at “0”.
For “7. Y Space”, set the value at “10”.

[Note]
For the first design to be synthesized, do not make settings for “6. X Space” and “7. Y Space”. Based on the first design, the positions of the second design’s X Space and Y Space will be changed. It is difficult to set X Space and Y Space of the second design at the same time. To find appropriate positions, the position setting shall be conducted several times.


The first design was set as in <Fig. 5.7.1-22>.

- ⑨ Press **F6** OK after setting as in <Fig. 5.7.1-22>.

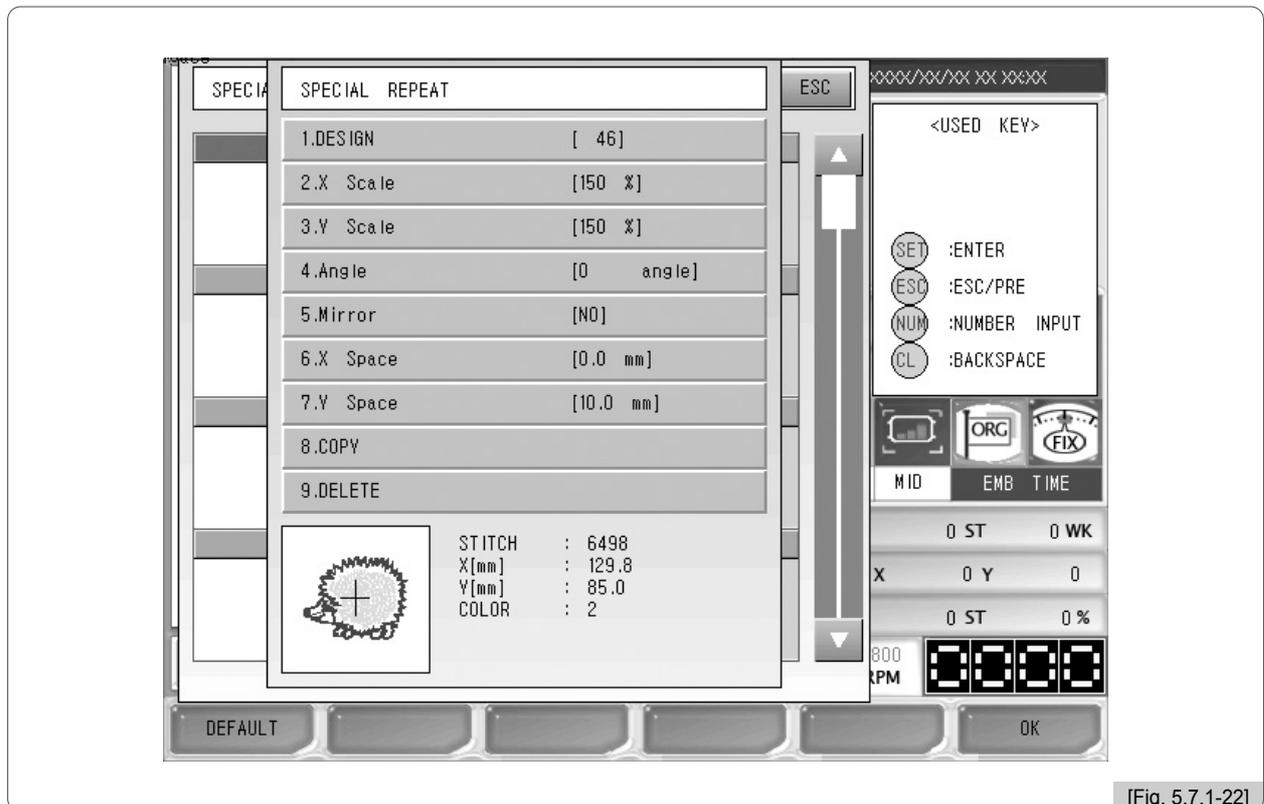

[Fig. 5.7.1-22]

As in <Fig. 5.7.1-23>, the first design setting has been completed.

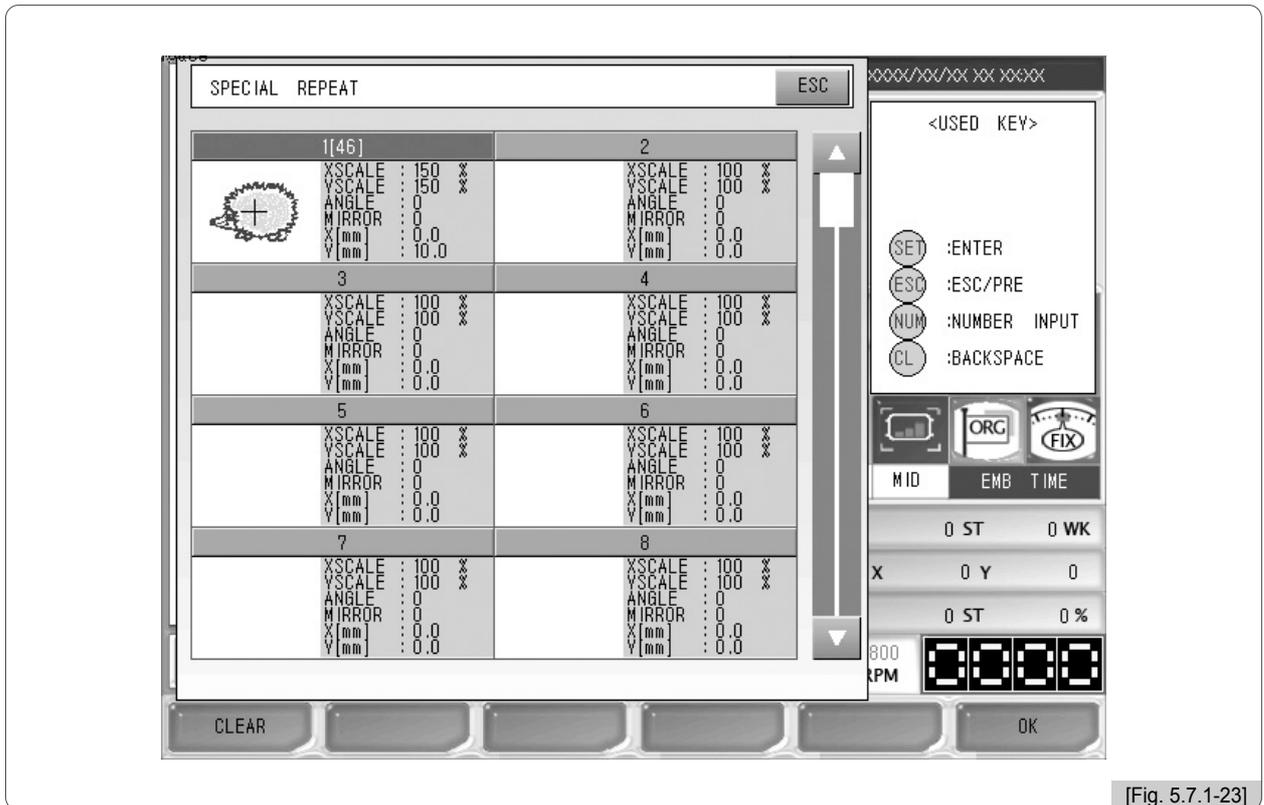

[Fig. 5.7.1-23]

⑩ Use the menu move buttons in <Fig. 5.7.1-23> and move to No. 2 item, and then press **SET**.
As in <Fig. 5.7.1-19>, the screen for setting appears.

⑪ In “1. Design”, select No. 11 design.


⑫ Enter “200” for “2. X Scale.”

⑬ Enter “200” for “3. Y Scale”
(For “4. Angle”, “5. Mirror”, leave their setting as default.)

⑭ Enter “0” for “6. X Space”.
Enter “ - 10” for “7. Y Space”.


The second design was set as in <Fig. 5.7.1-24>.

- 15 Use the menu move buttons in <Fig. 5.7.1-24>. Move the cursor to “Apply”, and then press **SET**.

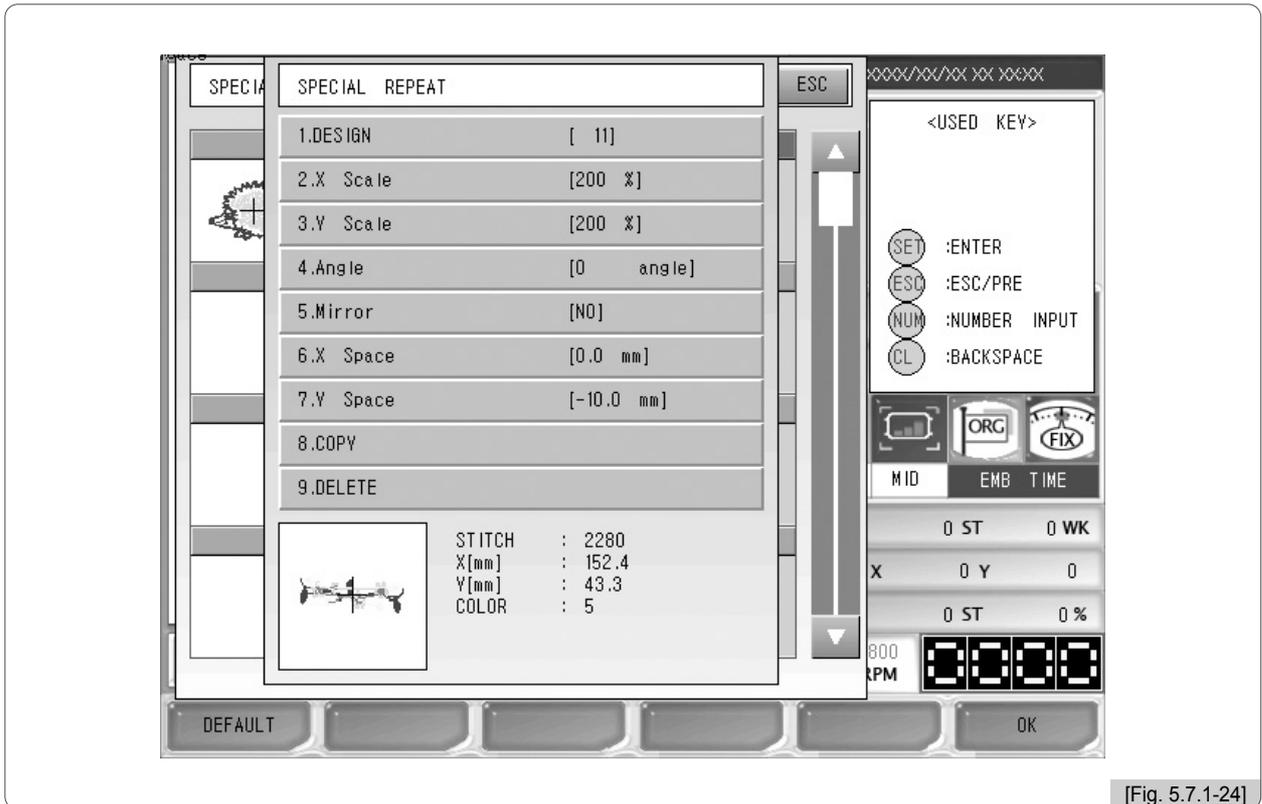

[Fig. 5.7.1-24]


As in <Fig. 5.7.1-25>, the setting has been completed.

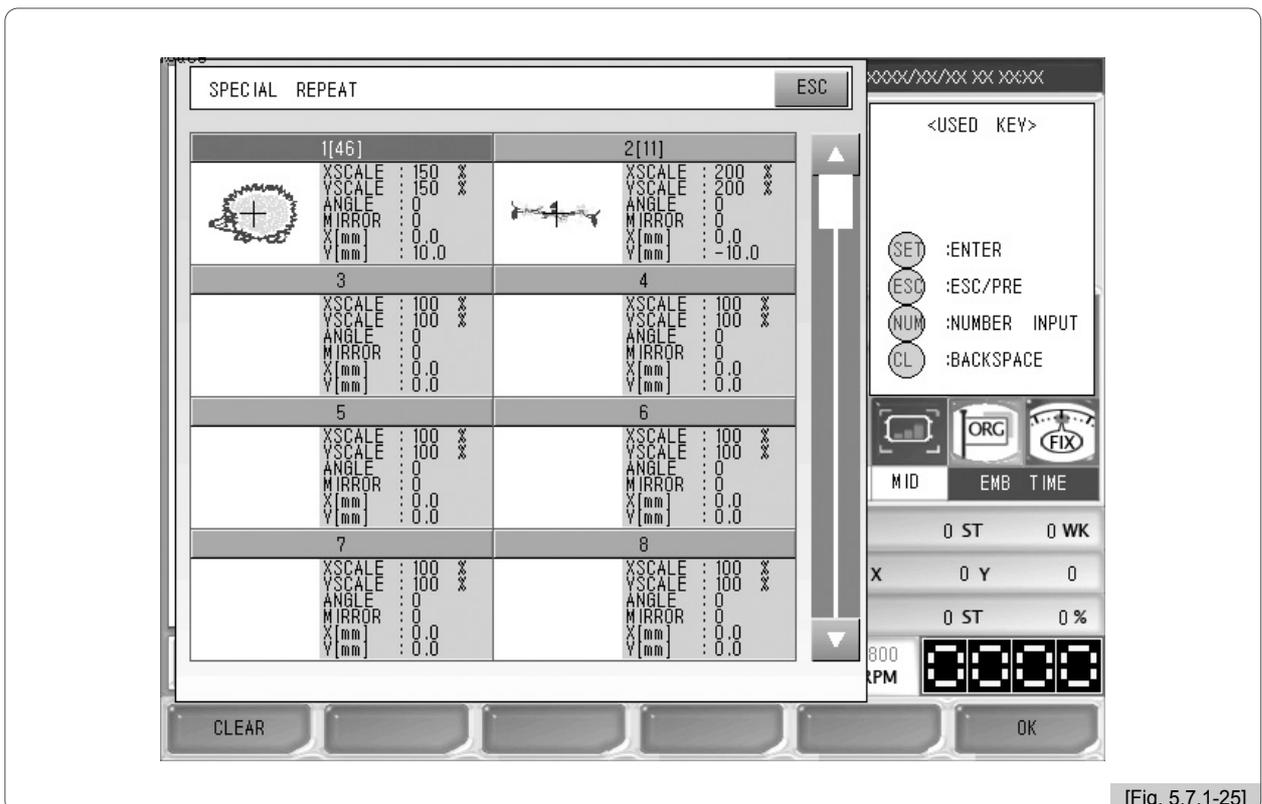

[Fig. 5.7.1-25]

16 Press **F6** OK on the upper side of the screen in <Fig. 5.7.1-25>.


As in <Fig. 5.7.1-26>, the screen asking for the saving method will appear.

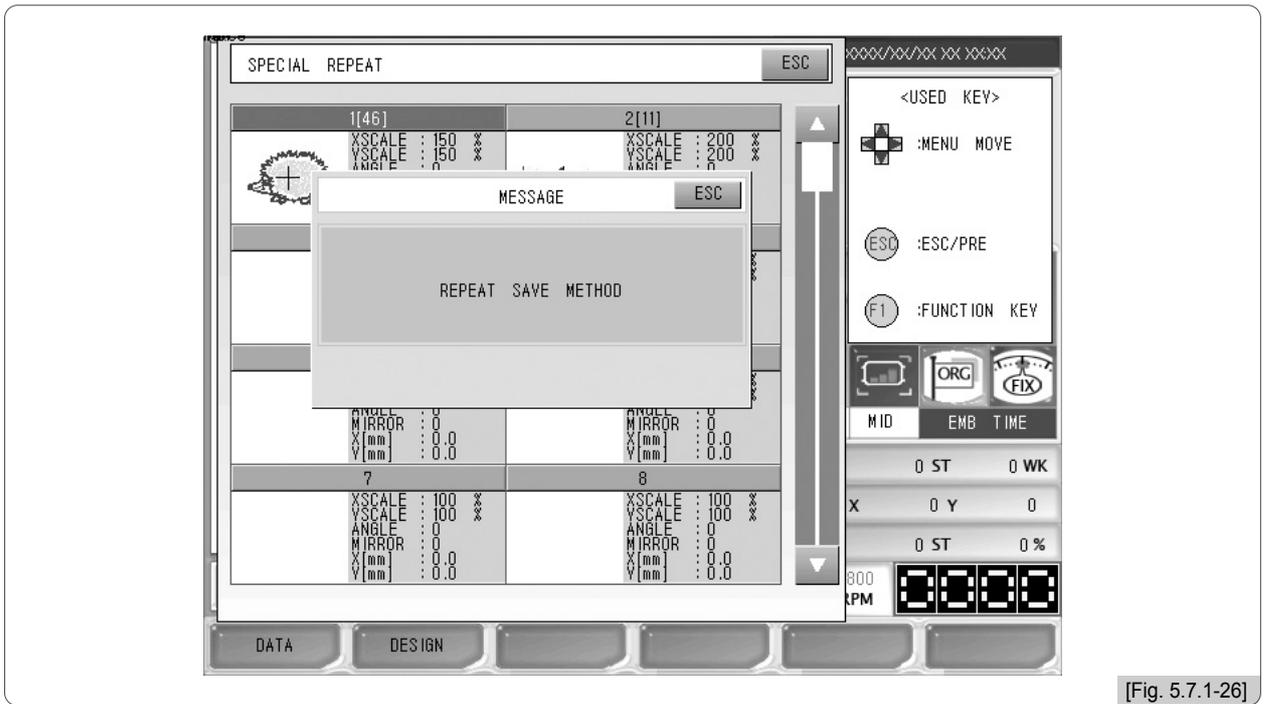

[Fig. 5.7.1-26]

17 Press **F1** Data .

As in <Fig. 5.7.1-27>, Room 1 is occupied by the general consecutive design which was created in [Exercise 5.7.1-1].

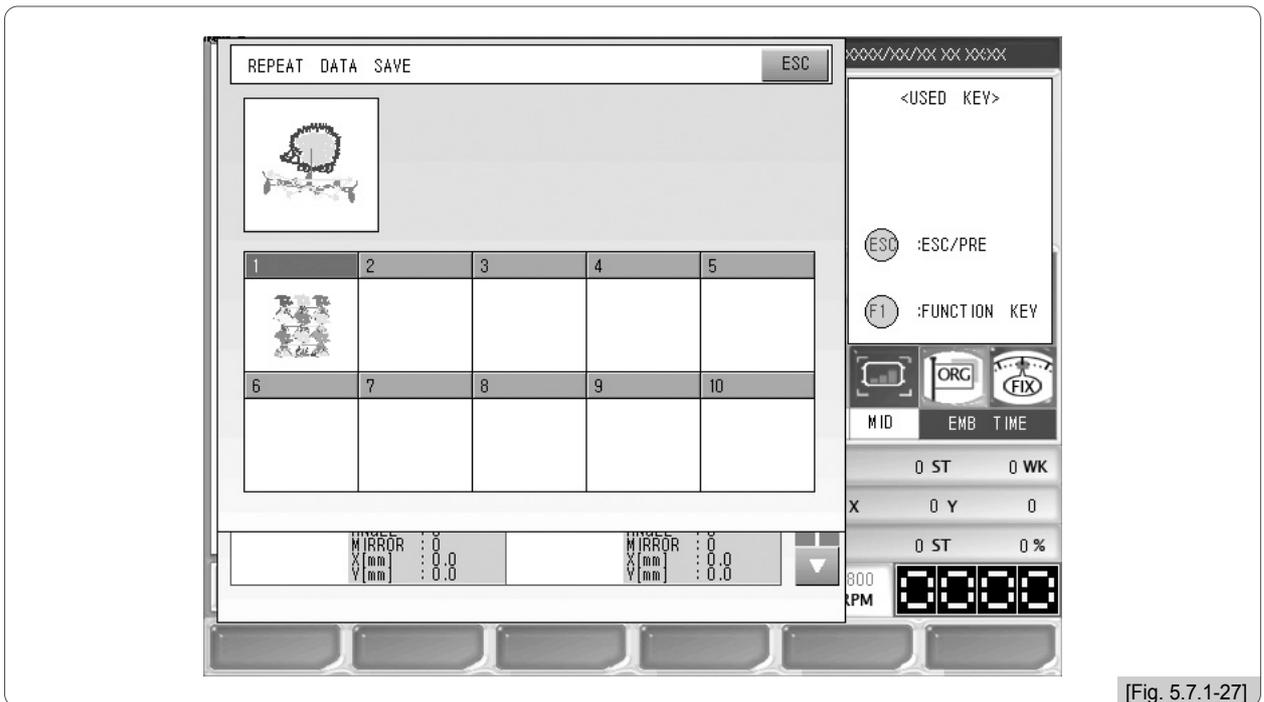

[Fig. 5.7.1-27]

18 In <Fig. 5.7.1-27>, select Room 2 and press **SET** .


As in <Fig. 5.7.1-18>, the special consecutive setting screen appears.

(3) Repeat Data Load

This function is to call the designs where consecutive work was saved as data.

In <Fig. 5.7.1-1>, press Consecutive Work Call, and then <Fig. 5.7.1-28> will appear.

<Fig. 5.7.1-28> has two consecutive works saved. Use the menu move buttons to select a desired consecutive work, and press **SET** for design call.

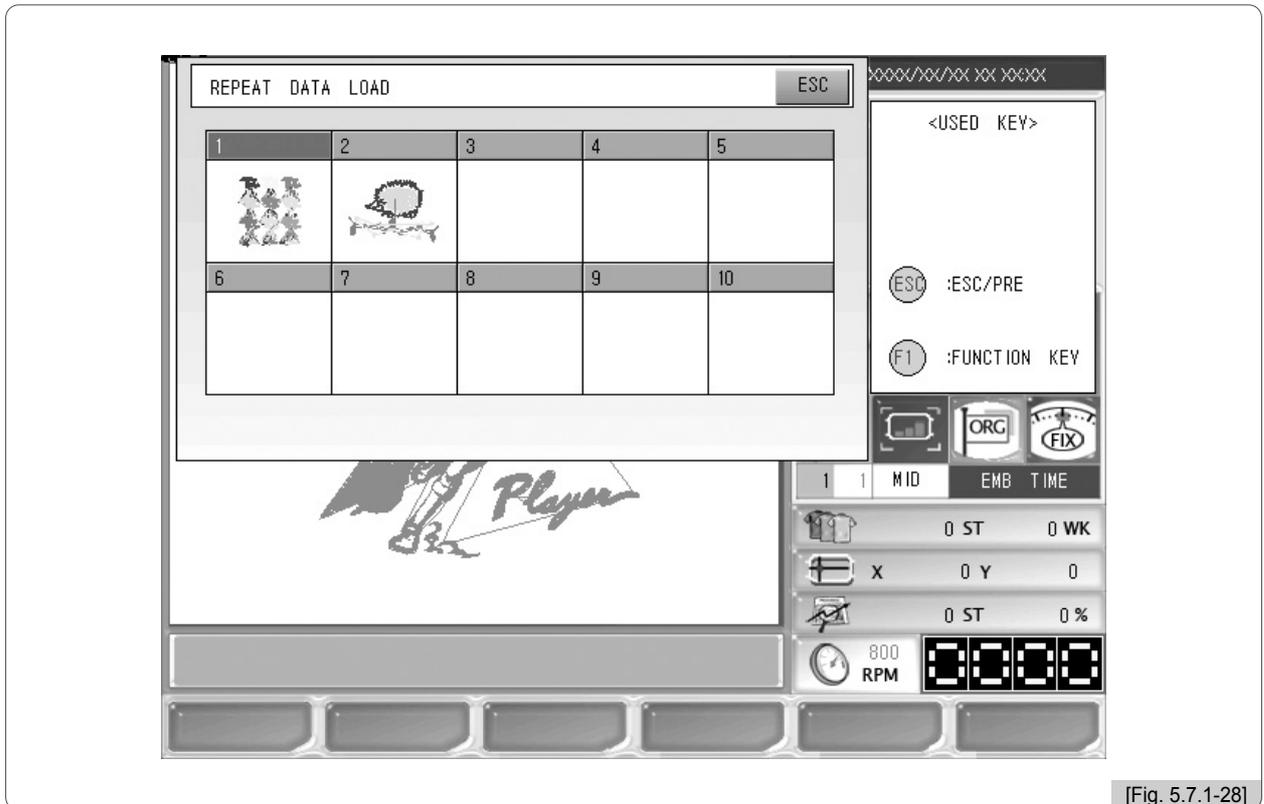


[Fig. 5.7.1-28]

5.7.2 Edit

This function is to edit designs.

<Fig. 5.7.2-1> is the screen, which appears when Consecutive Work is chosen in <Fig. 5.7.0-1>.

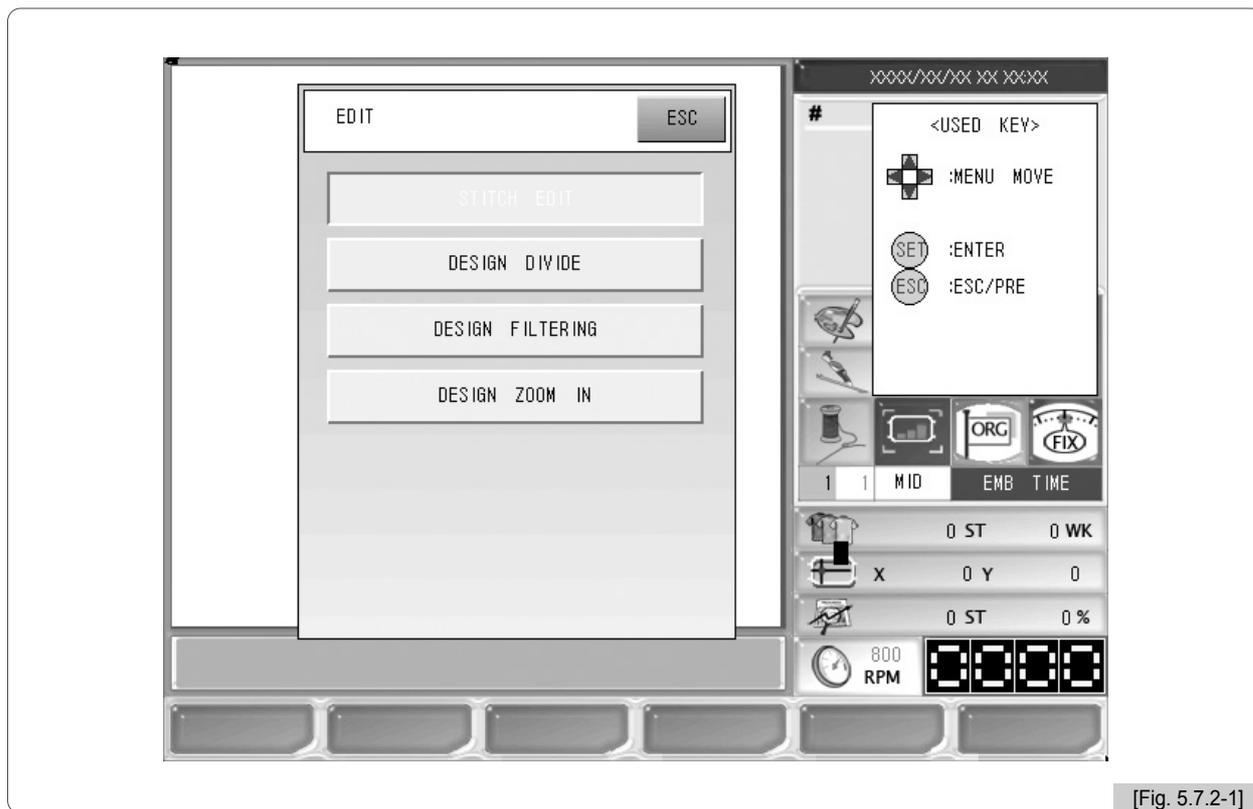


- **Stitch Edit** : It shows needle data of the called design, and based on those, code change for each needle and needle number change can be conducted.
- **Design Divide** : It saves two different designs for the selected part of the design.
- **Design Filtering** : It automatically deletes unnecessary needle data during design creation.
- **Design Zoom in** : It enlarges the chosen part of the design, and checks the needle gap.

(1) Stitch Edit

This function is to change codes and needle numbers by needle based on the called design data.

<Fig. 5.7.2-2> is the first screen for Stitch Edit in <Fig. 5.7.2-1>.

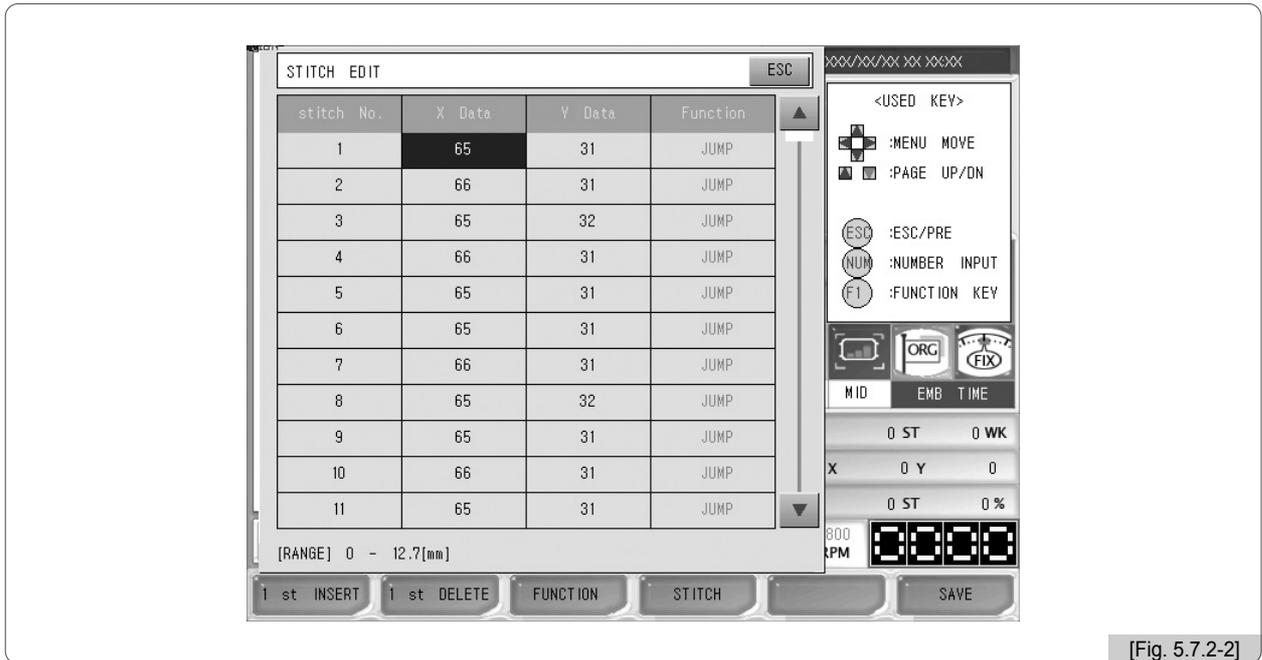

[Fig. 5.7.2-2]


<Fig. 5.7.2-2> is the screen where needle numbers can be edited.

Use the menu move buttons to move to the needle data or needle code which is desired for correction.

Enter values by using number buttons, and then press INSERT and DELETE .


To move to the next page, press .

As in <Fig. 5.7.2-3>, when X data or Y data is selected, the data is open to correction. Use the number buttons for entry. To move to the next data, use the menu move buttons.

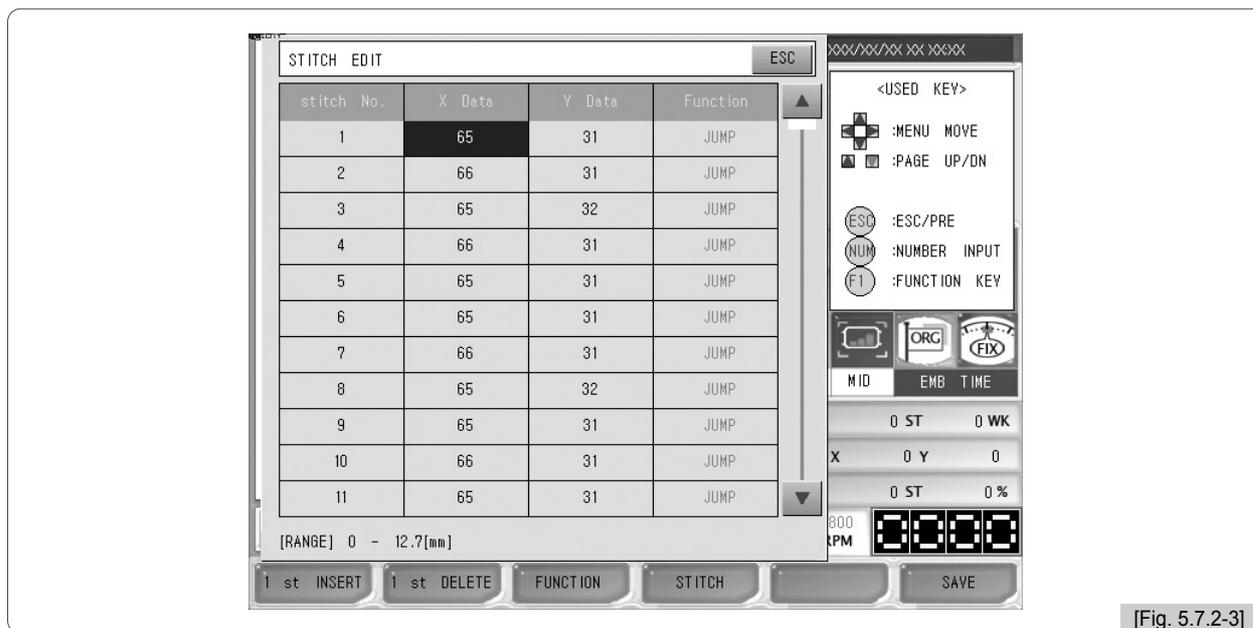

[Fig. 5.7.2-3]

As in <Fig. 5.7.2-4>, while the function code is selected, change the number key values from 0:Normal to 5:SQend. It has six codes and they can be set as value.

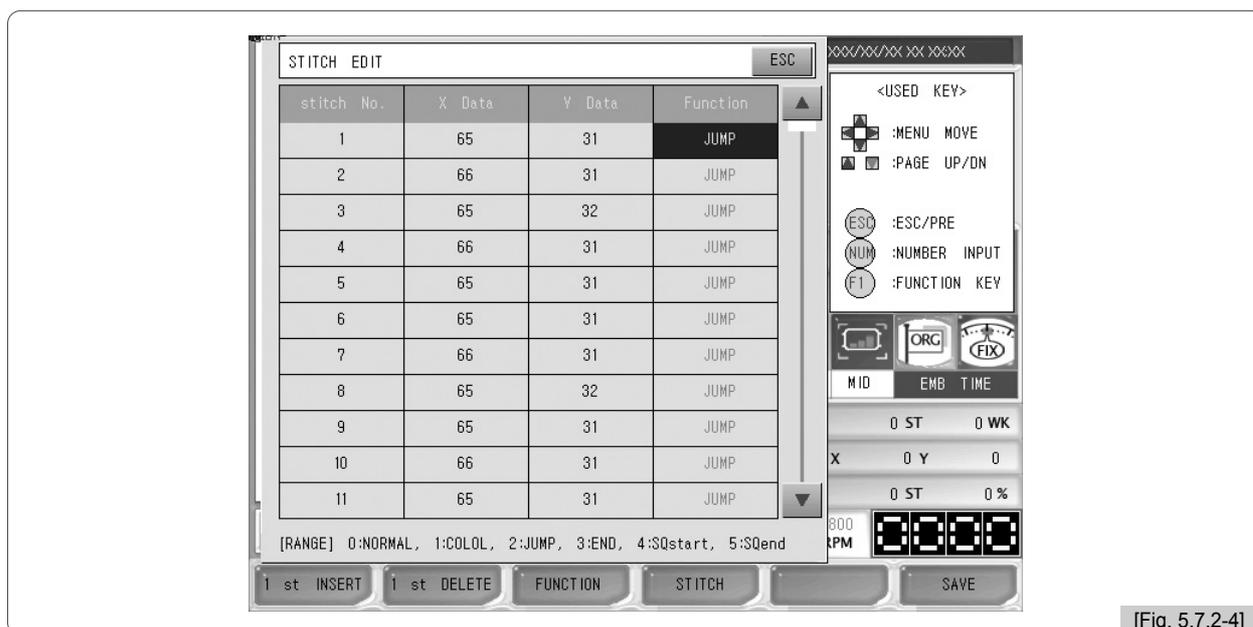


[Fig. 5.7.2-4]

[Exercise 5.7.2-1] Call the design in Room #35 and conduct the editing as below.

- 1] Delete the 3000th stitch data.
- 2] Change the 3500th stitch function code to the color change code.
- 3] Create and insert function code and jump code with X : 2mm, Y : - 5mm composed of 10000th or 10001st stitch.


1] Delete the 3000th stitch data

- ① Press **F6** DESIGN on the main function menu and select Edit.
- ② Press Stitch Edit in <Fig. 5.7.2-1>.
- ③ Use the menu move buttons and Page Up/Dn buttons to go to the 3000th needle.
Then, <Fig. 5.7.2-9> will appear.

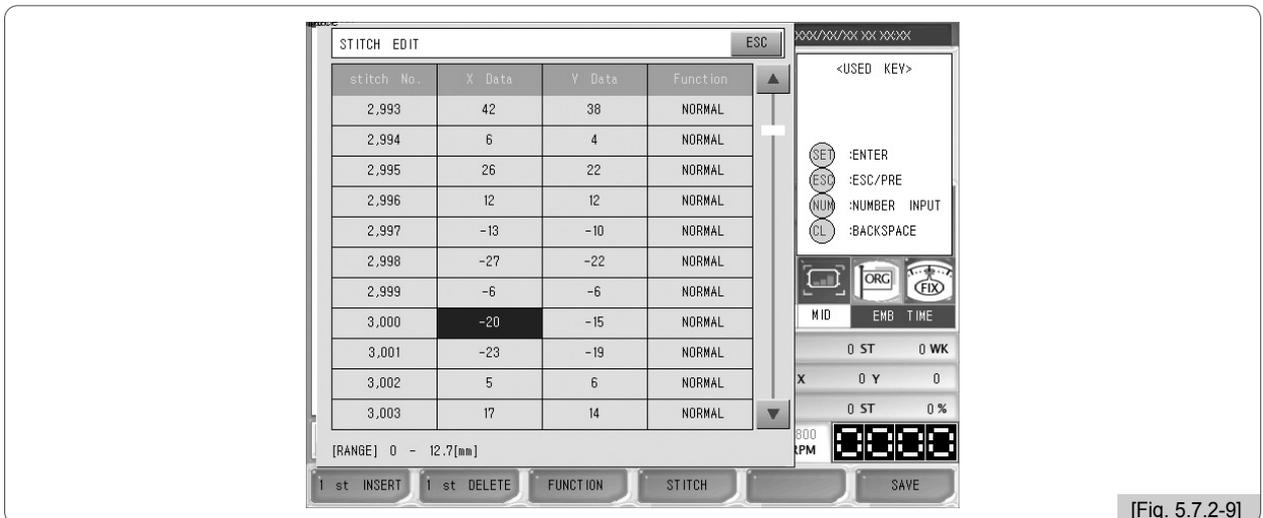

[Fig. 5.7.2-9]

- ④ Select the 3000th stitch line and press **F2** 1ST DELETE .

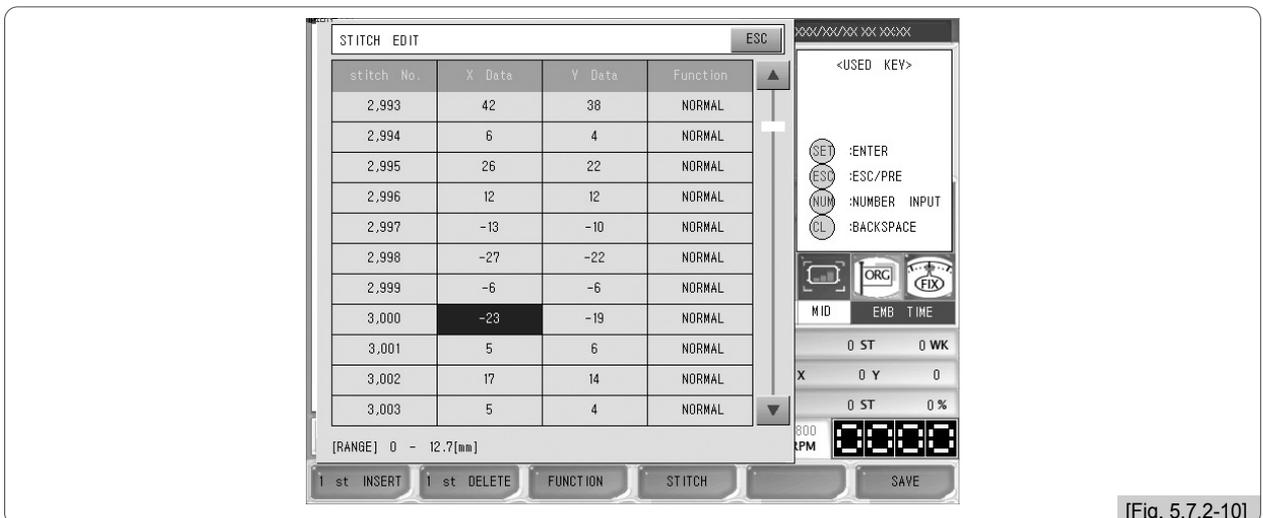


[Fig. 5.7.2-10]

- ⑤ As in <Fig. 5.7.2-10>, the 3000th stitch is deleted, and the stitches from below have moved up by one line respectively.


2] Change the function code to color change code of 3500th stitch

- ① Use the menu move buttons and page Up/Dn buttons to move to the 3500th stitch.
- ② As in <Fig. 5.7.2-11>, select the 3500th stitch line and use the menu move buttons to go to the function code.

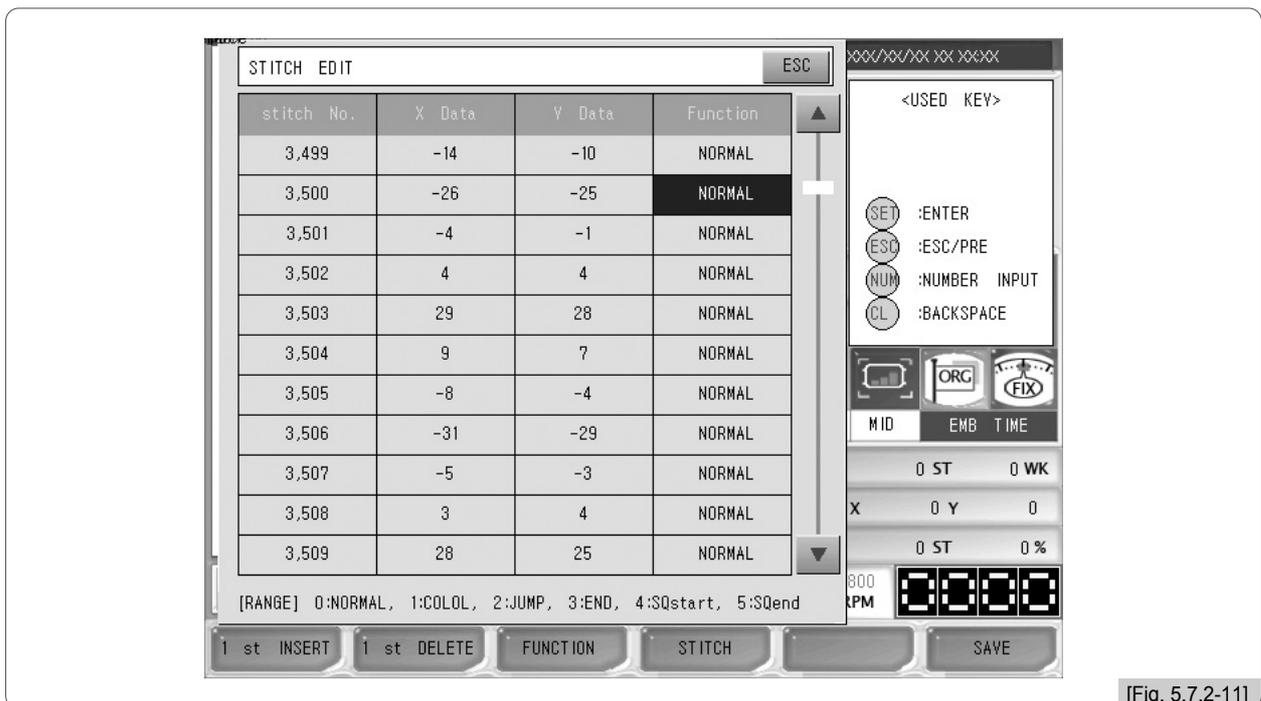

[Fig. 5.7.2-11]

- ③ Enter "1".

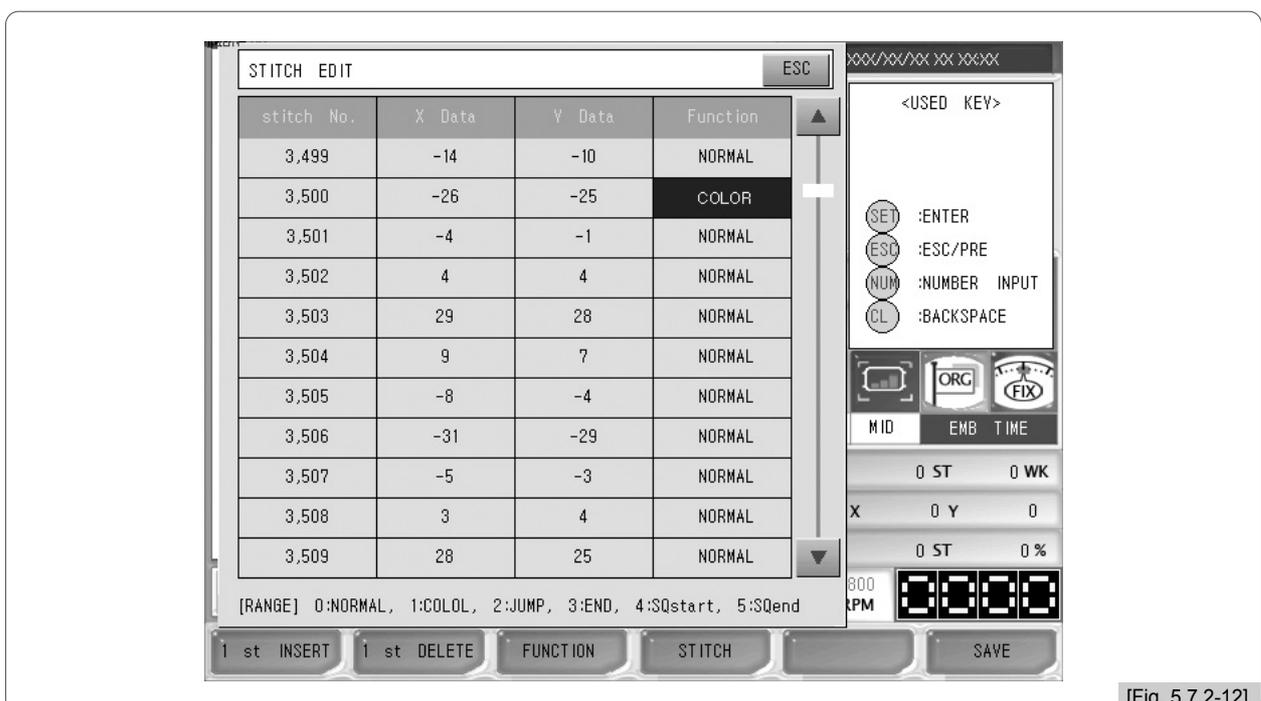


[Fig. 5.7.2-12]

As in <Fig. 5.7.2-12>, the function code is changed to the color code.

3] Create and insert “X:2mm, Y: – 5mm, function code: jump code” between 5000th and 5001st stitch.

① Use the menu move buttons and the page up/dn buttons to go to the 5000th stitch.


<Fig. 5.7.2-13> will appear.

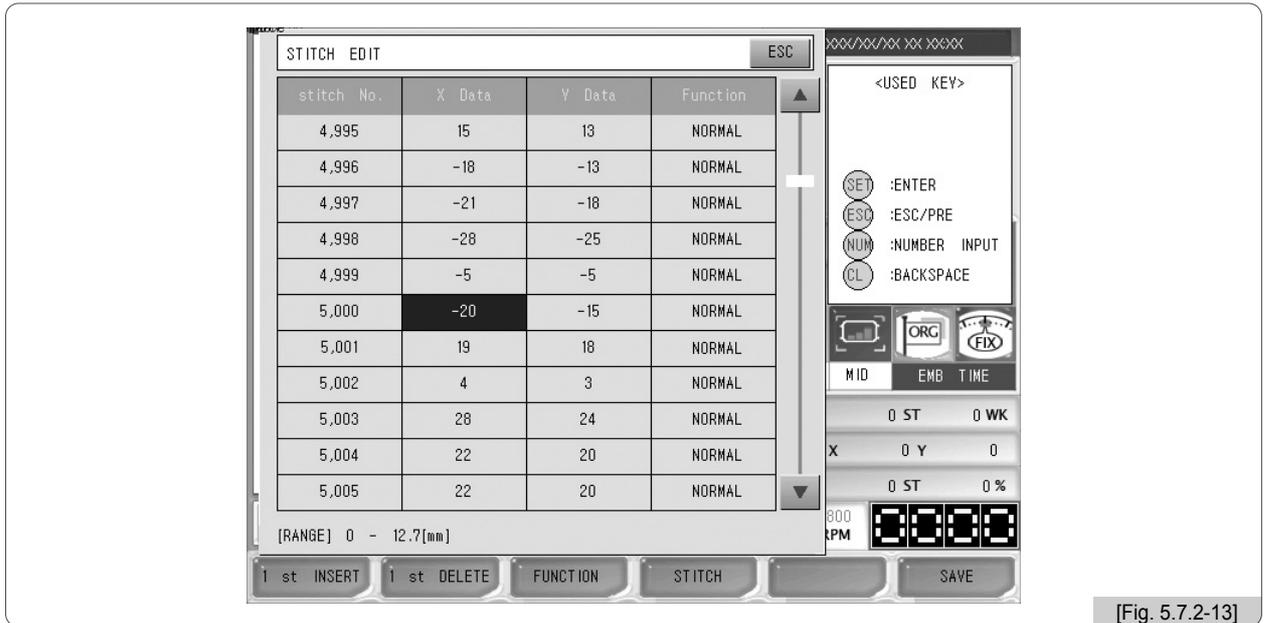

[Fig. 5.7.2-13]

② Select the 5000th line and press **F2** 1ST INSERT .

Then, as in <Fig. 5.7.2-14>, the 5001st needle has been inserted.

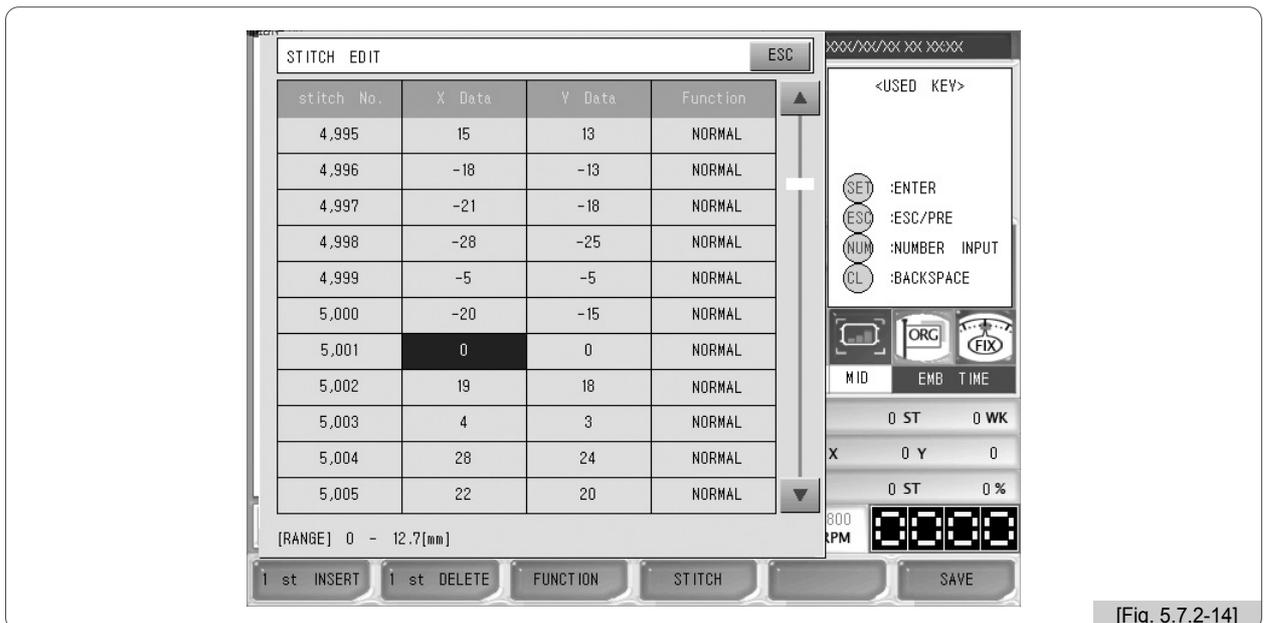


[Fig. 5.7.2-14]

③ Enter “2” to X Data.

Enter “-5” to Y Data.

④ Change the function code to 2. jump code.


5 As in <Fig. 5.7.2-15>, the entered values are set.

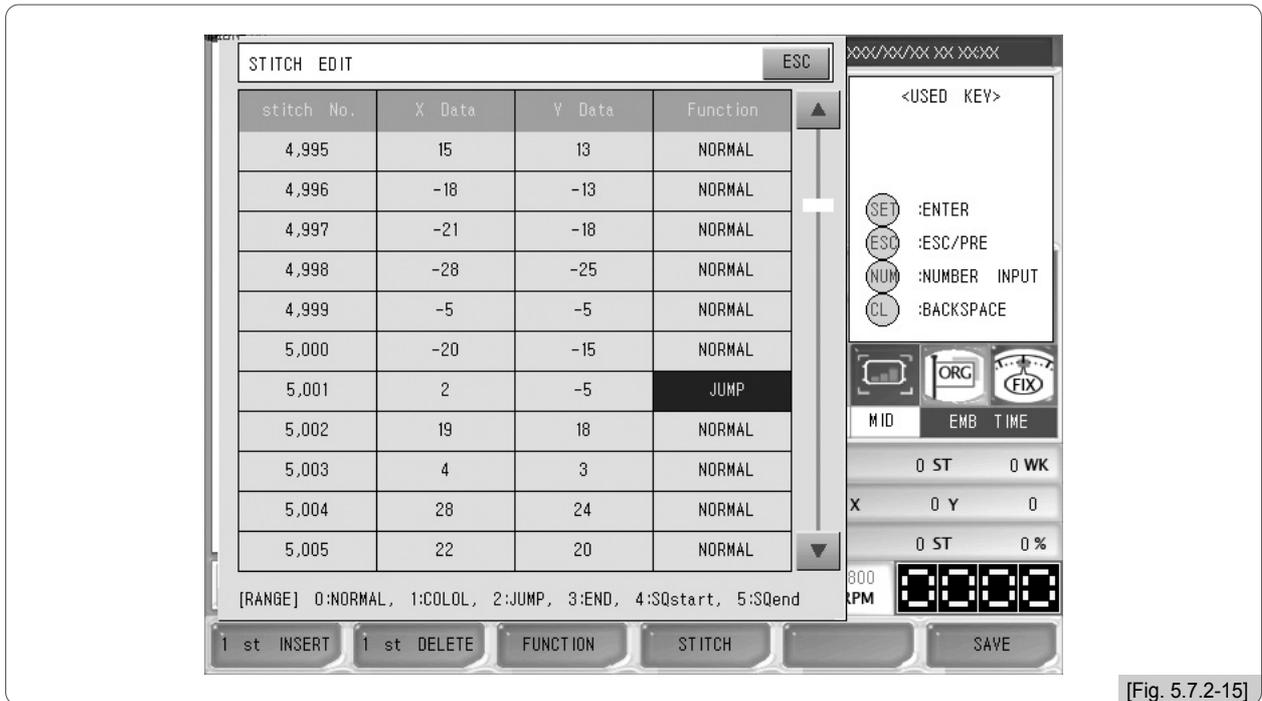

[Fig. 5.7.2-15]

6 Press **F6** SAVE and <Fig. 5.2.7-16> appears.

Press **F1** YES. The entered value is saved in the 5001st line.

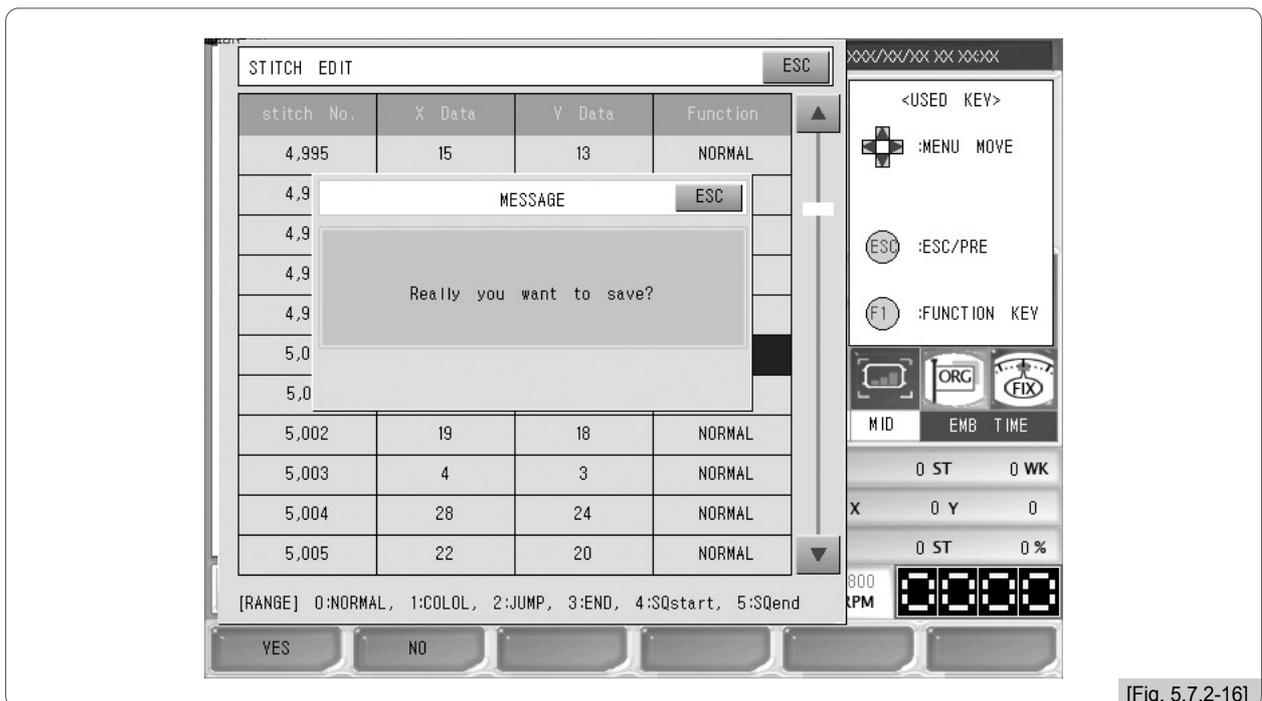

[Fig. 5.7.2-16]

(2) Design Divide

This function is to save two different designs of the desired part of the design chosen. The designs can be divided by color or needle number.

<Fig. 5.7.2-17> will appear when stitch separation is pressed in <Fig. 5.7.2-1>. The design on the left side is the design chosen during design call. The screen on the right is to show the remaining part of the design, which was separated from the chosen design.



[Fig. 5.7.2-17]

F1 STITCH : It sets the number of stitches to be separated from the design.


F2 - COLOR : This button can be used after the + color button is pressed, and has the opposite function of the + color button. When this button is pressed, color is added to the original design.
(Same to **-COLOR** as in 5.6.4 Route Check.)

F3 + COLOR : When this button is pressed, only one color is left on the left, and all colors are moved to the right side.
(Same to **+COLOR** as in 5.6.4 Route Check.)

F4 SELECT : The separate two designs are saved in the memory.

[Exercise 5.7.2-2] Separate the called design based on the 5000th stitch, and separately save the remaining part.

- ① Press **F4 DESIGN**, and use the direction buttons to select “Edit Menu” in the design sub-menus.
- ② Press “Design Separate” on the edit menu.
- ③ Press **F1 STITCH** in <Fig. 5.7.2-17>.
As in <Fig. 5.7.2-18>, the screen for setting will appear.

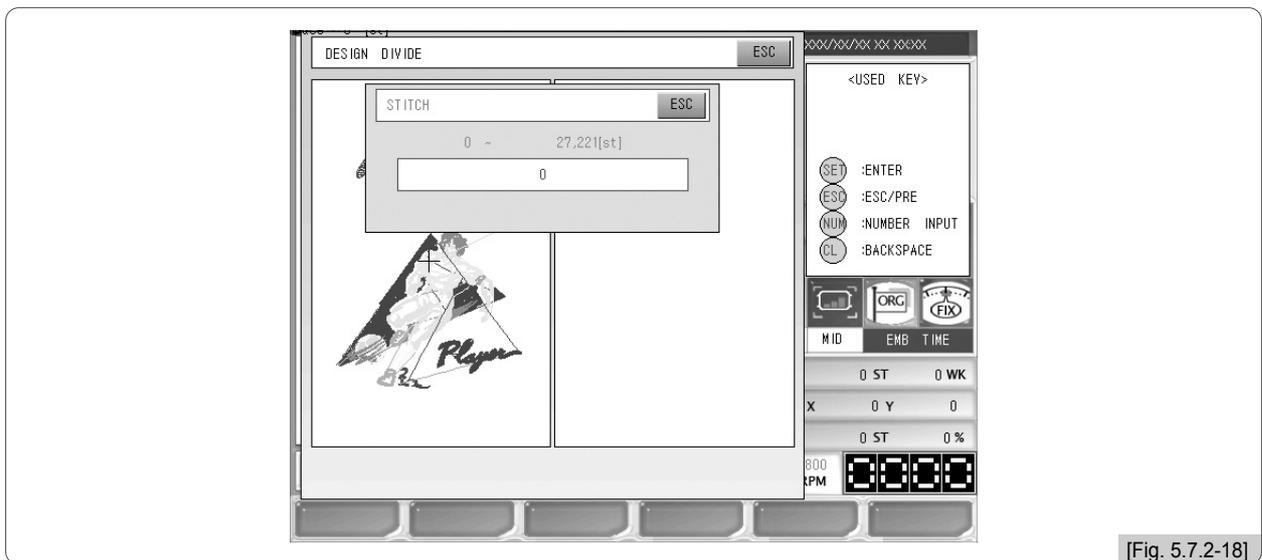

[Fig. 5.7.2-18]

- ④ Press “5000” by using the number buttons.
- ⑤ Press **SET**.
As in <Fig. 5.7.2-19>, 5000th stitch was set as the divide line, and the design was divided into two.



[Fig. 5.7.2-19]


- ⑥ Press **F4** SELECT .
 <Fig. 5.7.2-20> will appear.



[Fig. 5.7.2-20]

- ⑦ Enter the room numbers by using the number buttons.
 Room 72 and Room 73 have been chosen.

- ⑧ Press **F1** SAVE and **F3** SAVE respectively ,
 <Fig. 5.7.2-21> shows that the designs are separately saved in Room 72, 73 (See "Design Call".)

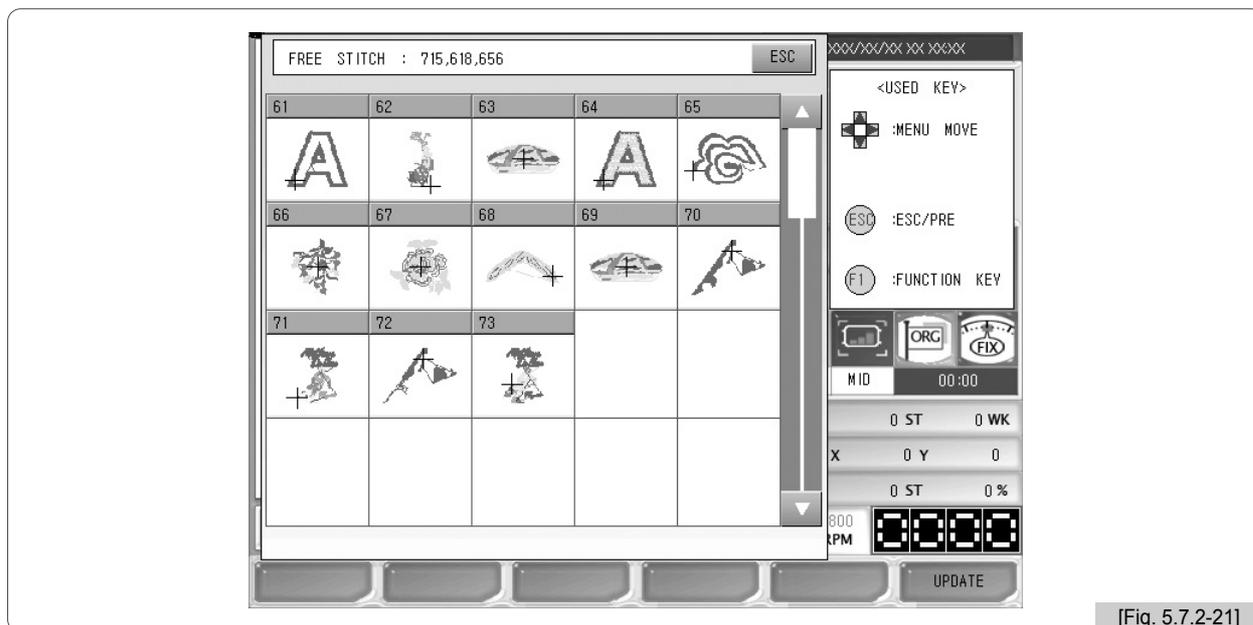

[Fig. 5.7.2-21]

[Exercise 5.7.2-3] Extract one color of the called design, and separately save the remaining part

1 Press **F4** DESIGN and select “Edit” on the sub-menus.

2 Press “Design Separate” on the edit menu.

3 Press **F3** + COLOR in <Fig. 5.7.2-17>.


When it is pressed once, only one color remains on the left side as in <Fig. 5.7.2-22>, and the remaining colors move to the right side for color separation.



[Fig. 5.7.2-22]

4 Press **F4** SELECT.

<Fig. 5.7.2-23> will appear.

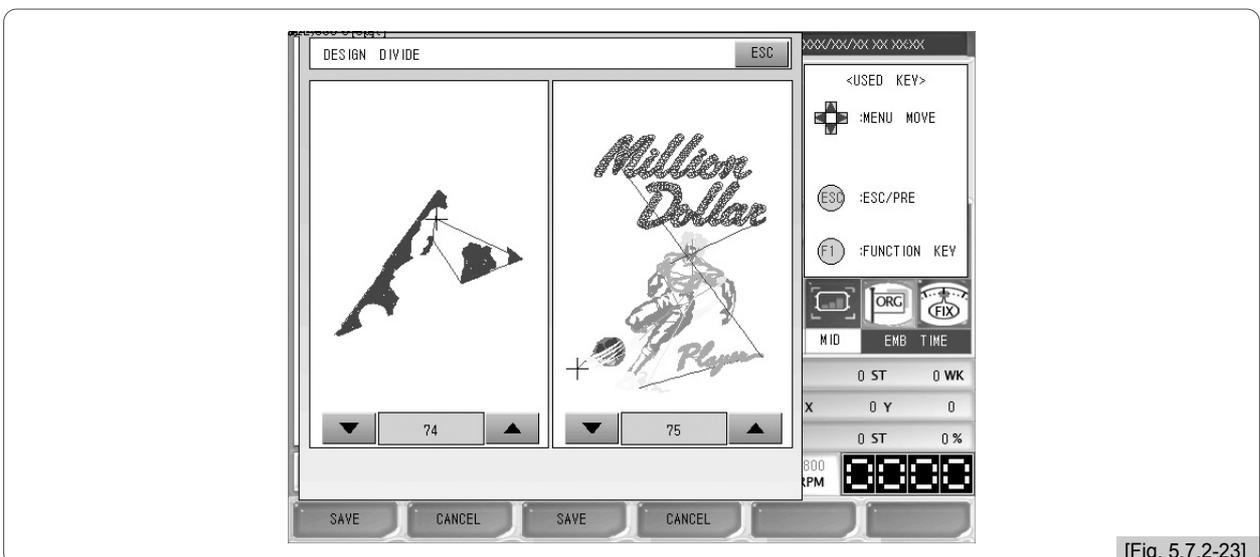


[Fig. 5.7.2-23]

5 Enter room numbers for saving by using the number buttons.

The separated designs are saved in Room 74 and Room 75.

6 Press **F1 SAVE** and **F3 SAVE** .


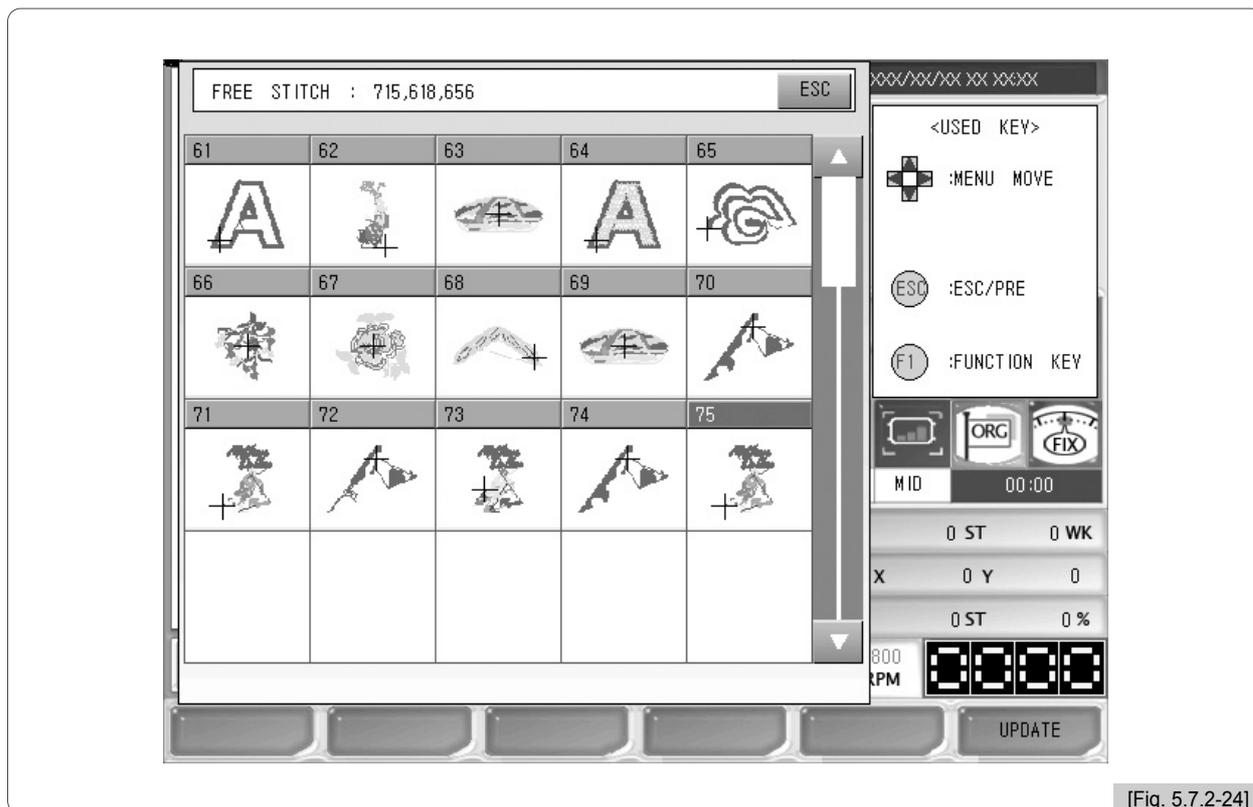


As in <Fig. 5.7.2-24>, the two divided designs are separately saved (See “Design Call”.)

(3) Design Filtering

If the distance from one stitch to the other stitch is too short (0.1 ~ 0.3mm), the thread might break very often during embroidery work. This function is to put together short stitches which are under the set value for optimization and enhance the entire number of stitches above the set value, so that it can prevent thread break.

The below screen <Fig. 5.7.2-25> appears when Optimize is pressed.

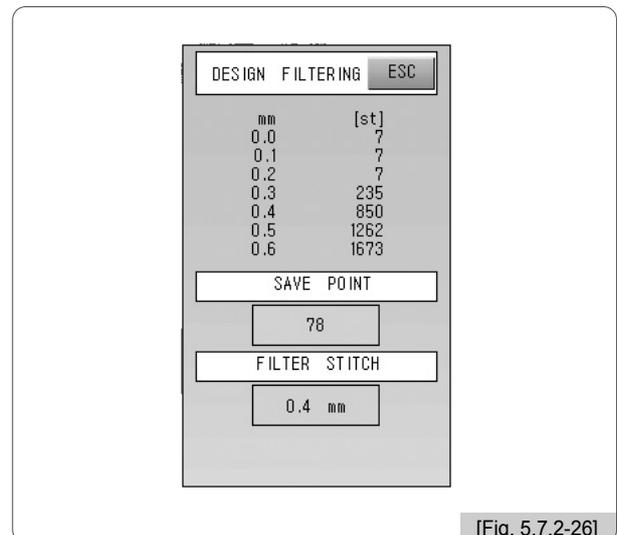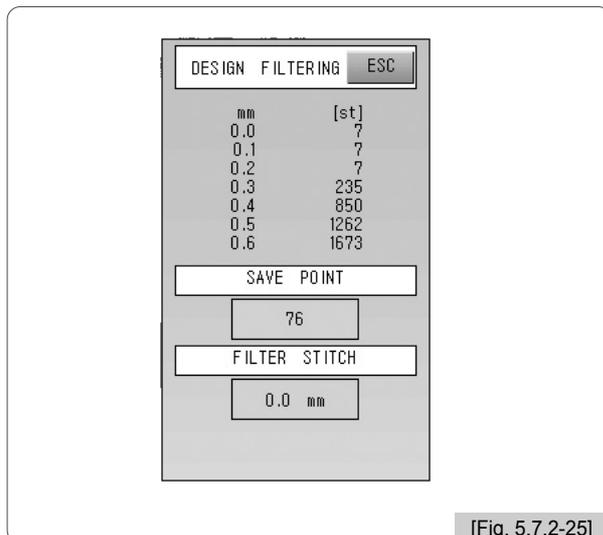

[Exercise 5.7.2-4] If there are stitches of 0.3mm or below in the called design, set the machine to embroider the stitches above the length

- ① Press **F6** DESIGN on the main function menu.
 - ② Use the direction buttons on the DESIGN menu to select Edit, and press **SET**.
 - ③ Check whether there are stitches of 0.3mm or below.
 - ④ If so, optimize the stitch length to 0.4mm by pressing the up/dn buttons, and press **SET**.
 - ⑤ Check the room number for saving and press Save.
- <Fig. 5.7.2-26> is the screen for confirming optimization after calling the optimized design.

[Note]


In <Fig. 5.7.2-26>, not all stitches were optimized. Likewise, all stitches cannot be optimized.

(4) Design Zoom In

When Design Enlarge is pressed, <Fig. 5.7.2-27> appears.

The screen is divided into the design enlarge section and the location adjust section. The enlarge section magnifies the design, and if the desired part is pressed on the location adjust section, the chosen part will be enlarged. The location adjust buttons can be used to set the desired location as well.





Whenever pressed, the magnification increases 1 times. The maximum magnification is 100 times.

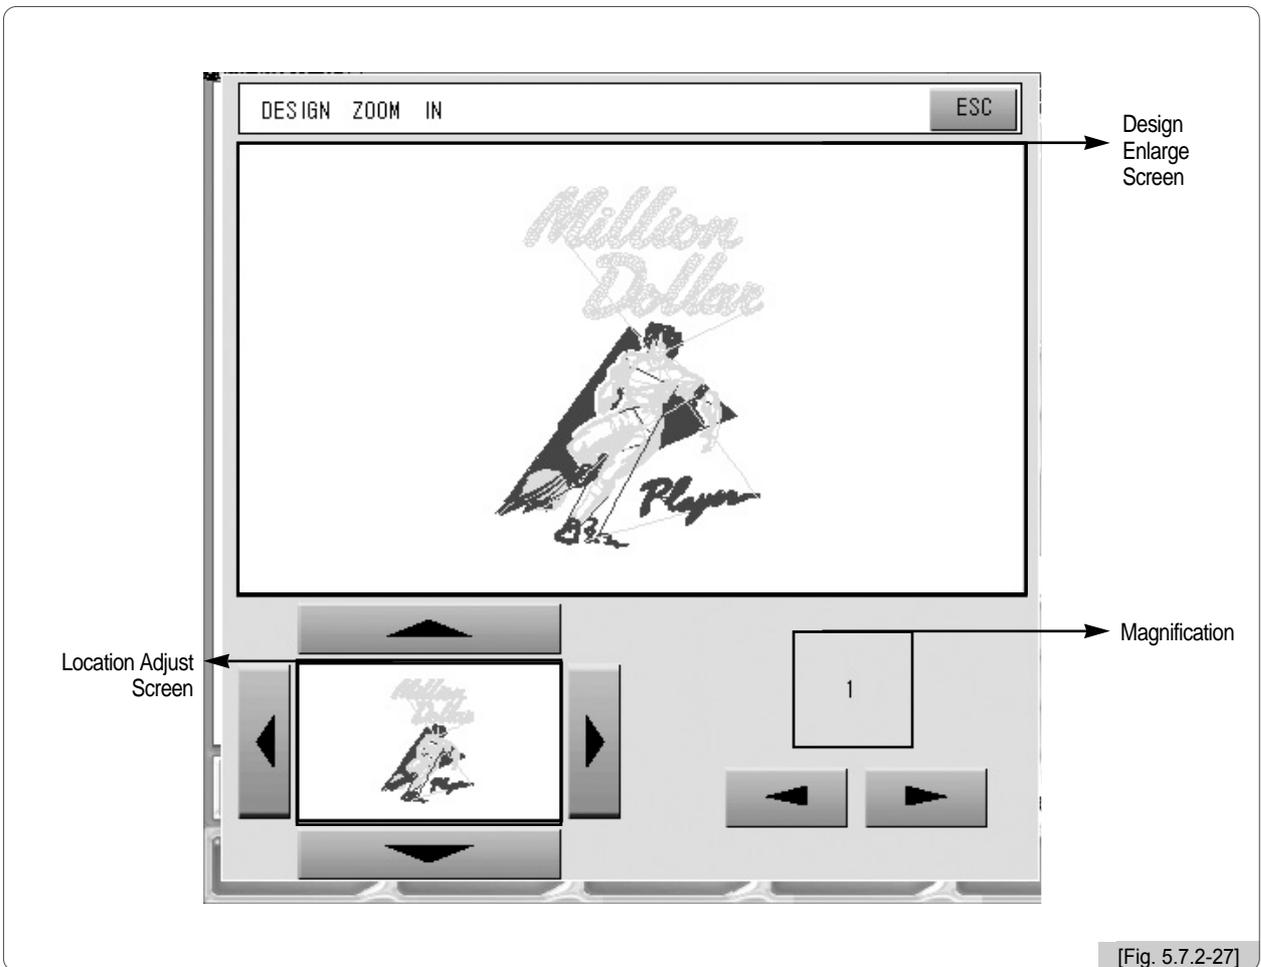

The figures below are the 2x, 4x, 6x, 10x, 20x, 50x enlarged images of the design in <Fig. 5.7.2-27>.

Use to  choose the part for desired enlargement.


Use to   decide the magnification increase or decrease.

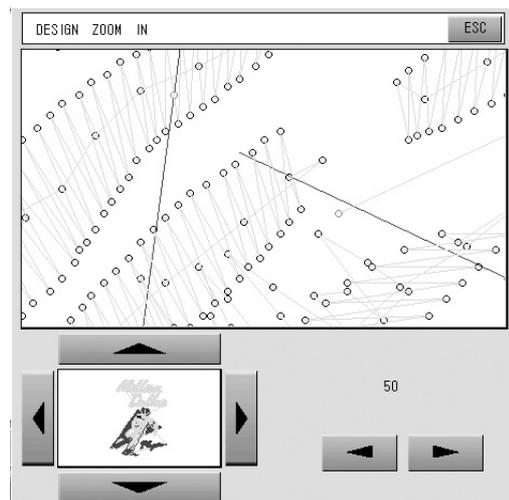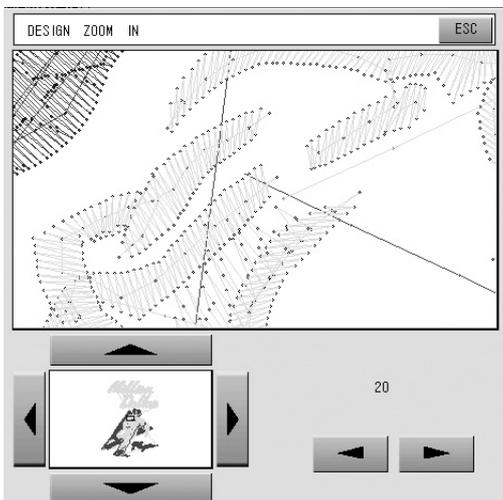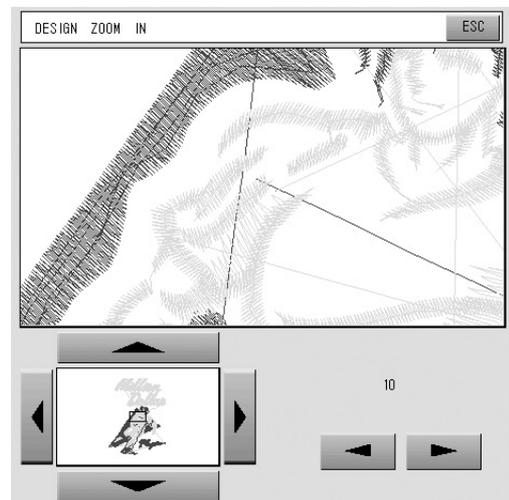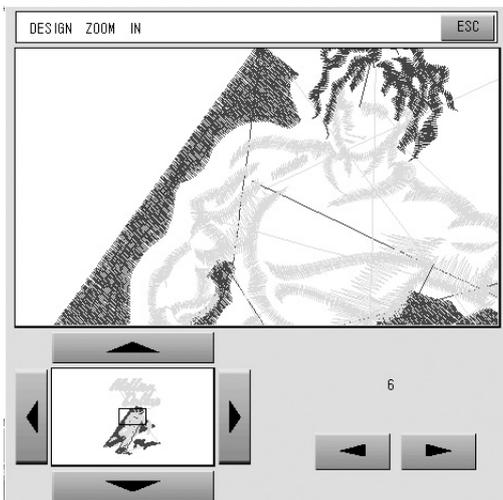

6

Function Menu During Embroidery Pause

<Fig. 6.0-1> is the screen which appears when embroidery work is paused. Basically, the screen has the layout similar to that before embroidery begins. For differences, however, “Supplementary Work” and “Tools” were removed from the main function menu. Instead, “Operation without Needle” and “Frame Feed” replaced them. And for settings, some menus are restricted. Before embroidery begins, it was possible to conduct various settings, but sometimes it is necessary to change the settings during embroidery for better results. In this context, let’s find more about the functions During Embroidery Pause.

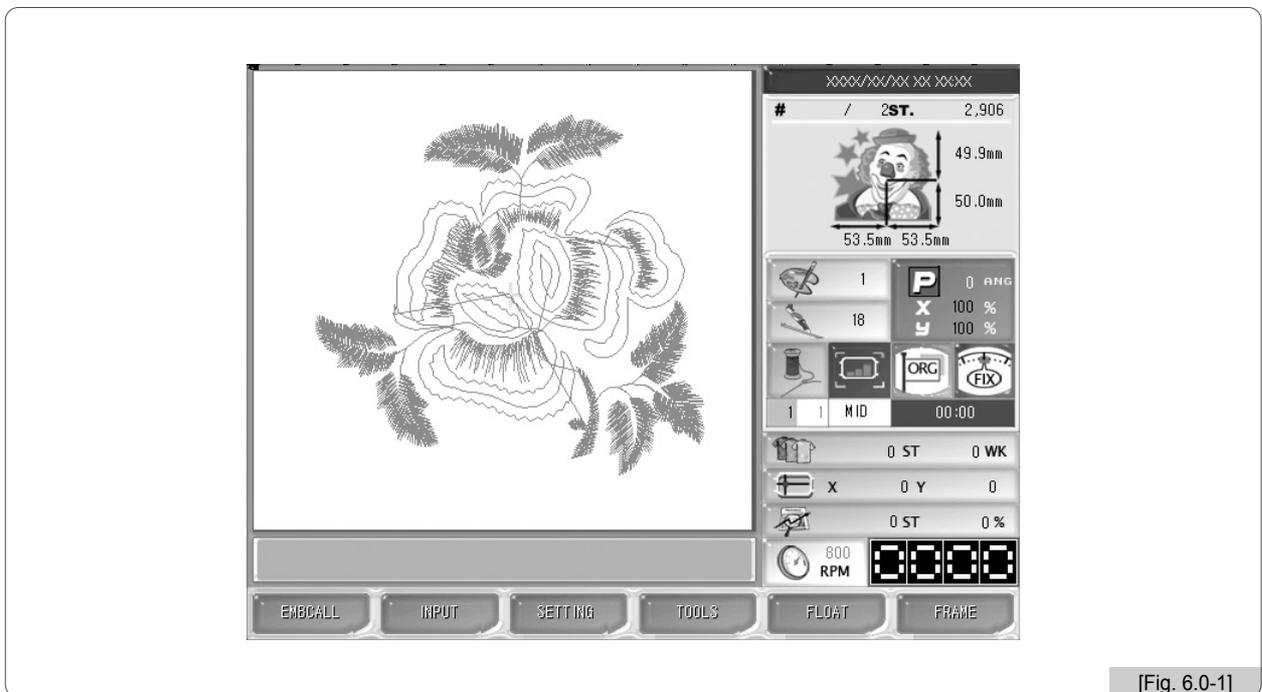

In this section, the explanation will focus on the different parts in Design Call and Setting compared with the menu before embroidery begins. non-stitching operation and Frame Feed will be explained in detail, too.

[Note]

To conduct the non-stitching operation by using the “Pause Menu During Embroidery”, press the pause switch, and the screen shows the “Pause Menu during Embroidery”.

※ Changes in the main function menu

F1 EMBCALL (Slightly different from the pre-embroidery function menu)

F2 INPUT (Same to the pre-embroidery function menu)


F3 SETTING (Same to the pre-embroidery function menu except for "Basic Setting" and "Options Setting")

F4 TOOLS (Same to the pre-embroidery function menu)

F5 FLOAT (Change in the menu)


F6 FRAME (Change in the menu)

6.1 Structure of Function Menus

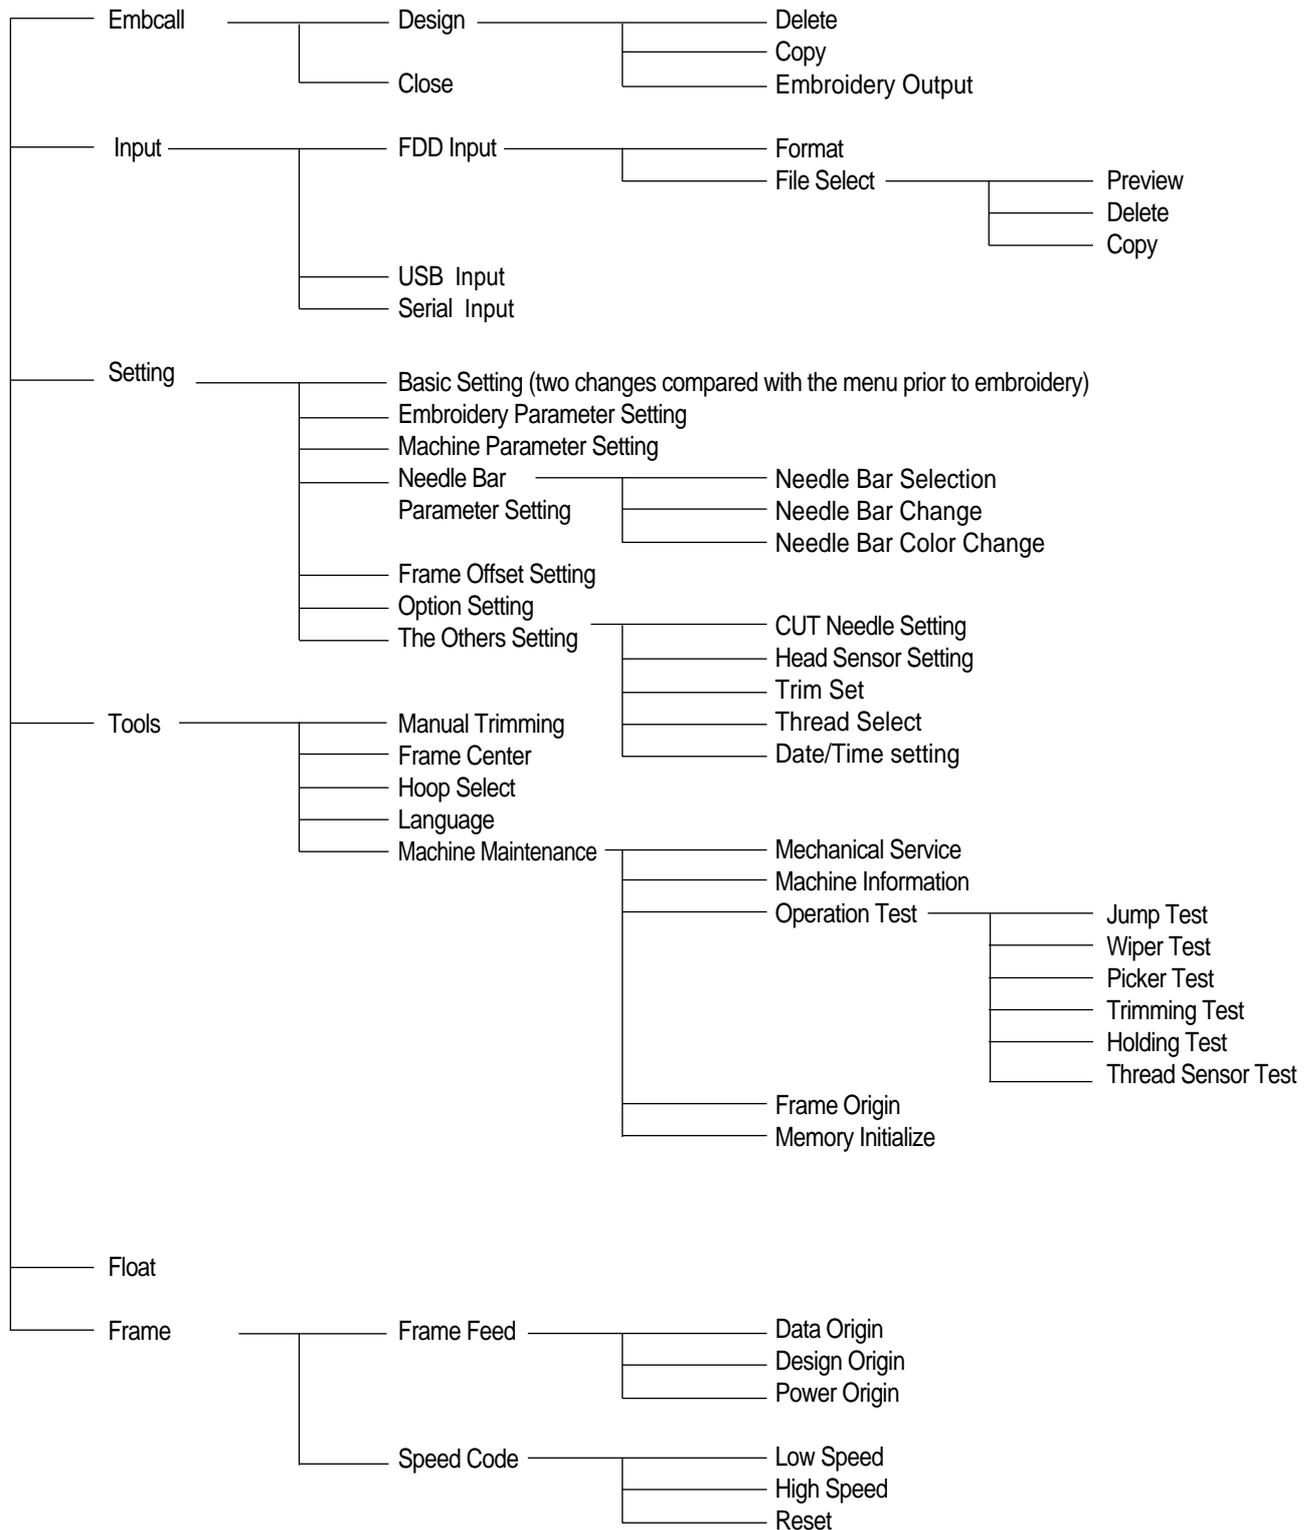


6.2 EMB Call

During the pause of embroidery work, when **[F1]EMBCALL** is pressed, the message asking “Do you want to cancel the work?” appears as in <Fig. 6.2-1>. If **[F1] YES** is pressed, the embroidery work will be stopped, and the main function menu will be changed to the main function menu before embroidery begins. If **[F2] NO** is pressed, the embroidery work will not be stopped, and as in <Fig.6.2-2>, the Design Call before embroidery begins appear. Although the delete and select function of the currently called design are limited, and the select function for the remaining designs are limited, it is possible that the designs can be displayed. Previously, to copy a design while embroidery is in progress, the embroidery work had to be completed. However, thanks to this function, now it is possible to copy designs in the middle of embroidery.

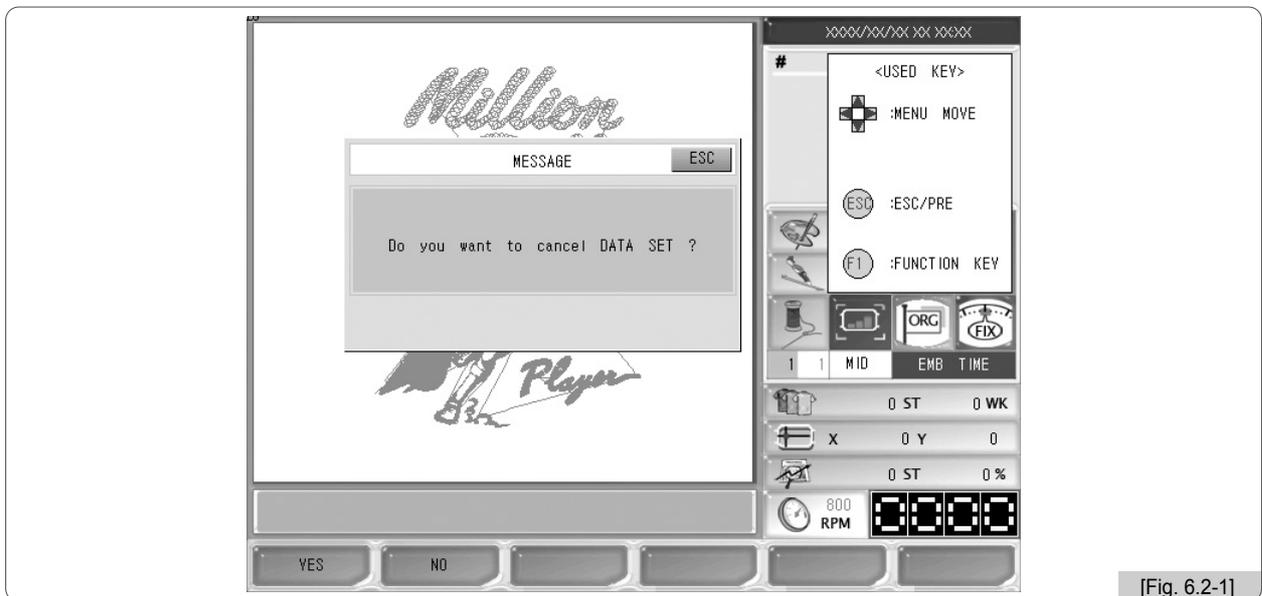

[Fig. 6.2-1]

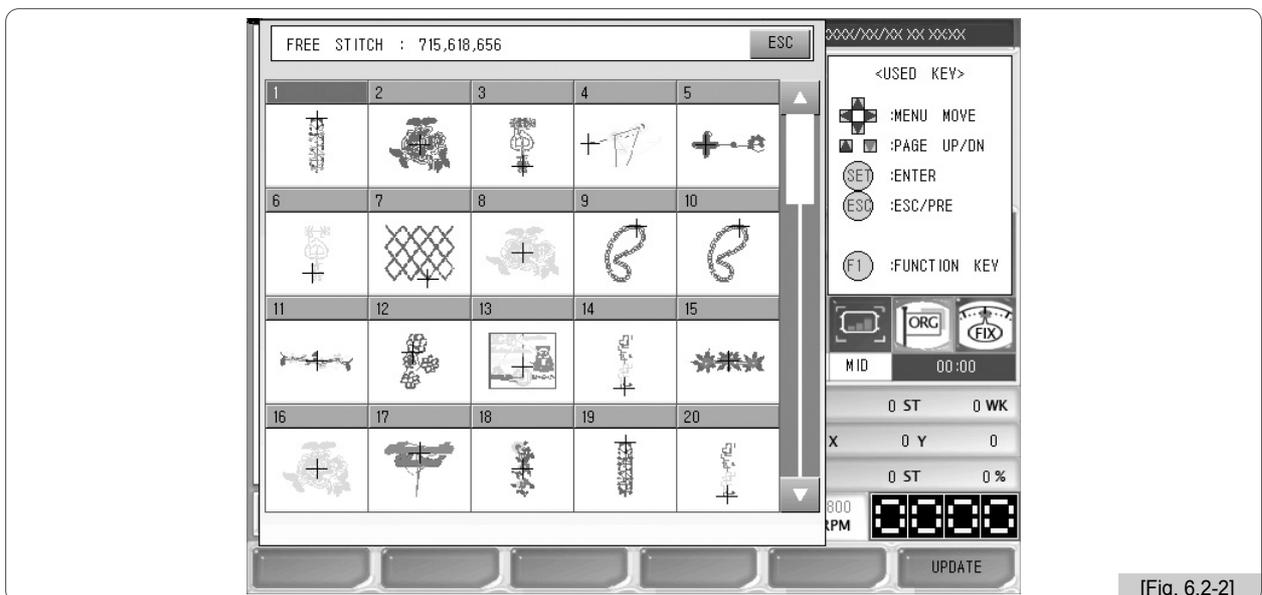


[Fig. 6.2-2]

The usage method is same to that for the menu before embroidery begins.

6.3 Setting

(1) Basic Setting

While embroidery work is paused, if “Setting” and then “Basic Setting” are pressed in order, <Fig. 6.3-1> appears. Except for “8. Frame Coordinates Setting (offset)” and “9. Thread Trimming by Jump Frequency”, all setting functions are limitedly applied. The limited functions cannot be used. But the two enabled functions can be used in the same way before embroidery begins.

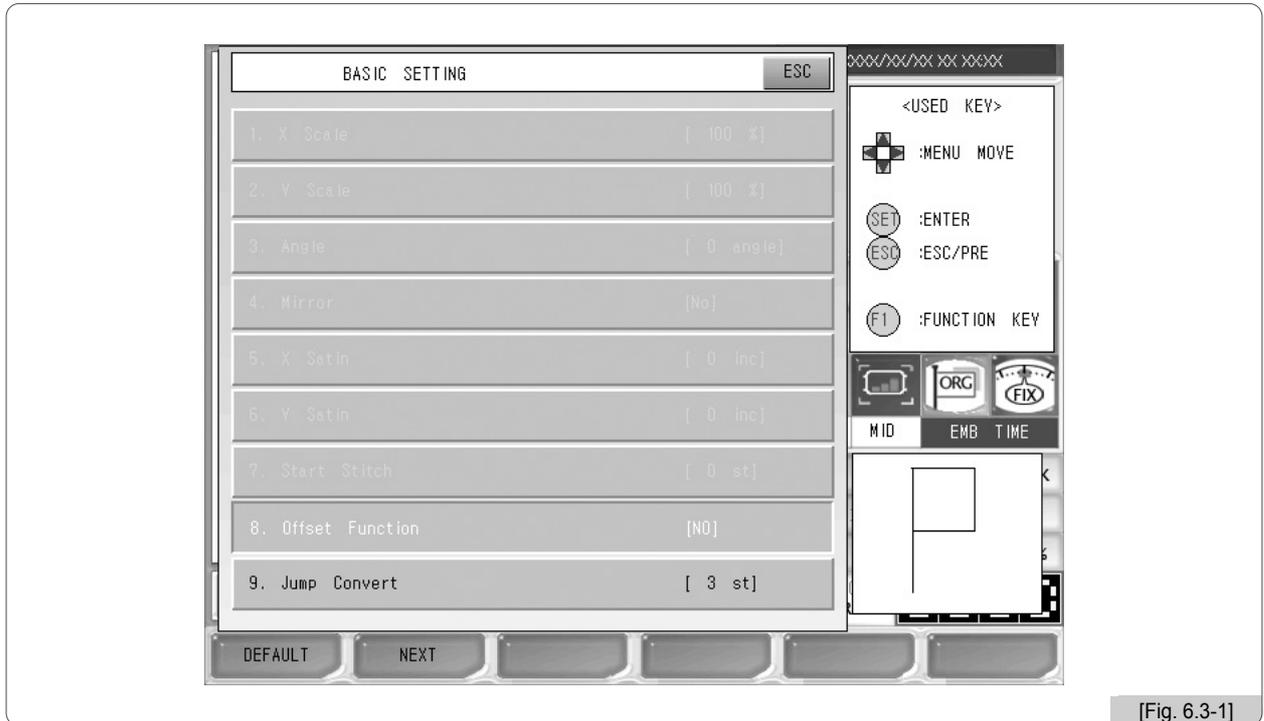

[Fig. 6.3-1]

(2) Options Setting


The Options Setting function cannot be used during embroidery work.

6.4 Float


This function is to conduct the embroidery work while skipping the embroidery for the desired part of the design.

<Fig. 6.4-1> is the screen for non-stitching operation, and it appears when **F5 FLOAT** is pressed <Fig. 6.0-1>.

As in <Fig. 6.4-1>, non-stitching operation can be set using the set number of stitches such as ± 1 , ± 100 , ± 1000 , ± 10000 or the \pm COLOR button. As in <Fig. 6.4-2>, values can be directly entered by using number buttons. To enter numbers, press **F6 STITCH** in <Fig. 6.4-1> and the setting screen appears. Use the number buttons to enter values and press **SET**.

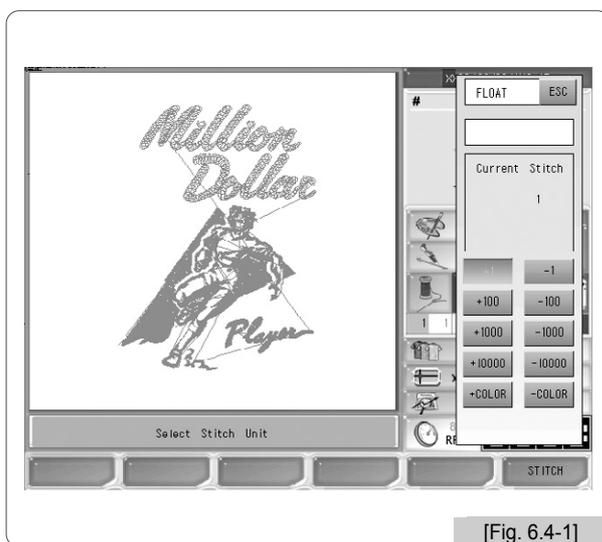

[Fig. 6.4-1]

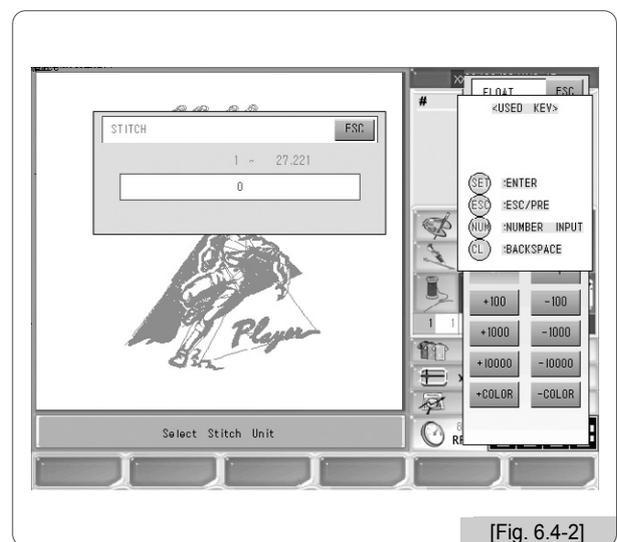

[Fig. 6.4-2]

※ Tips for non-stitching operation


- ① Press **F5 FLOAT**.
- ② Check current stitch and set the desired number of stitches.
- ③ Press the start button on the OP Box for operation.
Then the non-stitching operation embroidery will be conducted according to the set value.
To cancel, press **ESC**.

6.5 Frame

6.5.1 Frame Feed

This function is to remember the position of the frame when embroidery work is stopped in the middle of embroidery work (stop switch, thread break sensing, etc.), and make the frame move to the last position when the frame moves to other positions or when the power is turned off.

<Fig. 6.5-1> appears when **F6 FRAME** is pressed and the frame feed button is pressed.

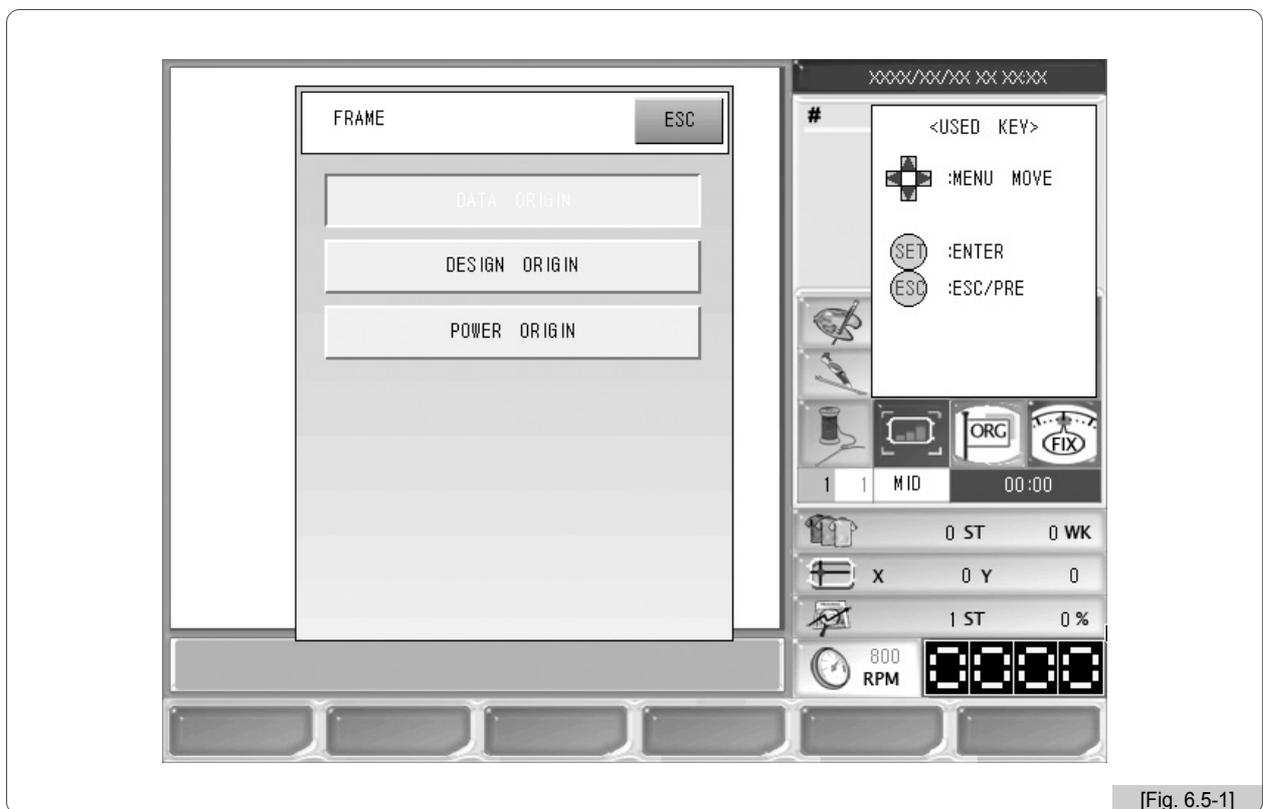

[Fig. 6.5-1]

- ① **Data origin** : It remembers the stop position of the frame when it is paused during embroidery work. Therefore, when the user desires to move the frame by using the frame move buttons or resumes embroidery after conducting other jobs, the frame could return to the last stop position.
- ② **Design origin** : It makes the frame return to the embroidery starting position.
- ③ **Power origin** : It remembers the last stop position although the power is out during embroidery work. Therefore, when the power is on, and the return to origin after blackout function is pressed, the frame moves to the last stop position. However, before embroidery work starts, the frame origin shall be accurately set.


Press the desired function buttons, and then the frame automatically returns to the desired position.

6.5.2 Speed Code

This function is to change the work speed from high speed to low speed for a particular part of embroidery work. While embroidering a design, the speed will change for the previously set part. When conducting an embroidery work of the same design, embroidery speed will change for a particular section as previously set.

Low speed setting can be made in “⑥ Low Speed Embroidery” under “5.4.3 Mechanical Parameter Setting”.

<Fig. 6.5-1> appears when **F6 FRAME** of the menu during embroidery pause is pressed and the ‘speed code’ menu is selected.

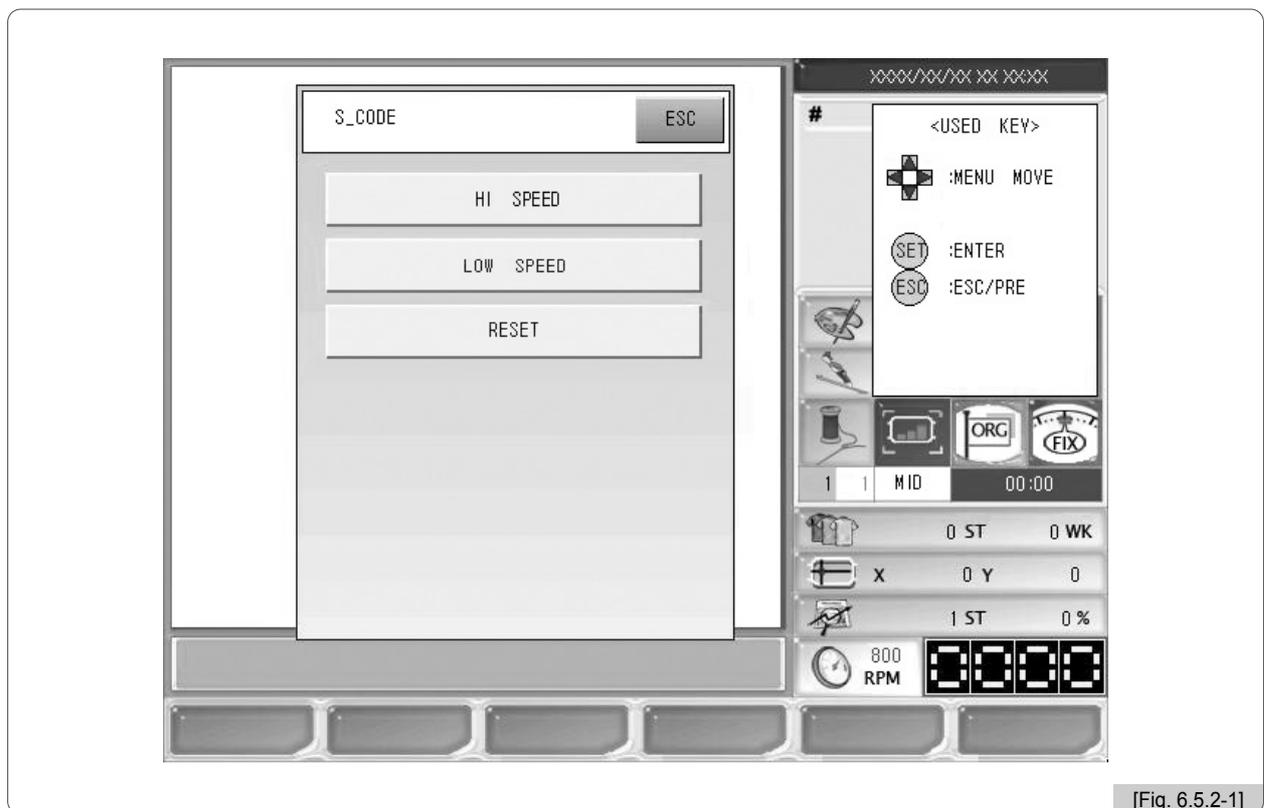

[Fig. 6.5.2-1]

(1) Low Speed

This function is to change the embroidery speed from high speed to low speed.

Pause the high-speed embroidery work and select “Low Sped” and press “Set”. Then when embroidery work is resumed, its speed becomes slow.

(2) High Speed

This function is to change the embroidery speed from low speed to high speed. Pause the low-speed embroidery work and select “High Speed” and press “Set”. When the start button is pressed, the embroidery speed becomes fast.

(3) Reset

This function is to initialize the speeds set for particular sections to default speed.

7

Troubleshooting

7.1.0 Error Messages and Handling

7.1.1 Main Shaft Motor and Others

No.	Error Name	Error Description	Correction
100	Main shaft motor stop position error	When it is stopped, the main shaft's angle is not 100 °	Use the lever to set the main shaft's angle at 100 ° .
101	Main shaft motor driver error	Main shaft motor driver develops an error.	Turn off and on the main switch.
102	Main shaft motor overload error	When a thread tangles the hook, when the needle bar's control body is bad, and when the thread becomes tangled during trimming, the error occurs.	Check the hook of the front head, and turn off and on the main switch.
103	No trimming system recovery	When the trimming sensor is not recovered upon trimming.	Check and respond to the abnormality of the trimming system.
104	Start switch error	When the power is on, the start button is pressed.	Check whether the start button contacts the connector.
105	Stop switch error	When the power is on, the stop button is pressed.	Check whether the stop button contacts the connector.
107	Valve error	When the valve is opened.	
108	Air pressure error	When the air pressure is below the standard (Sequin)	
109	Pulley ratio error	When the set pulley ratio is wrong	Change the driver setting after checking the main shaft pulley ratio.
110	AC Line error	When a problem occurs on the joint board.	Replace the joint board

7.1.2 X, Y Motor-related Errors

No.	Error Name	Error Description	Correction
200	(+ X) frame limit detection	The frame feed system reaches the +X limit.	Move the frame in the -X direction.
201	(- X) frame limit detection	The frame feed system reaches the -X limit.	Move the frame in the +X direction.
202	(+ Y) frame limit detection	The frame feed system reaches the +Y limit.	Move the frame in the -Y direction.
203	(- Y) frame limit detection	The frame feed system reaches the -Y limit.	Move the frame in the +Y direction.
204	X-axis driver error	Problems occur in the X-axis driver.	Turn off and on the main switch.
205	Y-axis driver error	Problems occur in the Y-axis driver.	Turn off and on the main switch.
206	Wiper return error	Wiper solenoid does not return.	Repairs the wiper mechanism.
207	Trimmer return error	Trimmer motor does not return.	Repair the trimmer mechanism.

7.1.3 Color Change

No.	Error Name	Error Description	Correction
300	Needle bar stop position error	When replacing the needle bar, the needle bar fails to reach the proper position.	Manually turns the needle bar to check the load of the needle bar, and place the needle bar at the stop position.

7.1.4 Encoder

No.	Error Name	Error Description	Correction
400	Error in the main shaft encoder A	Problems in signaling occurred in the main shaft's encoder A.	Check the connection of the encoder cable, and turn off and then on the main switch.
401	Error in the main shaft encoder Z	Problems in signaling occurred in the main shaft's encoder Z.	Check the encoder's cable connection, and turn off and again the main switch.

7.1.5 Consecutive Work

No.	Error Name	Error Description	Correction
501	Error in consecutive work setting	As in $(X\text{-axis number}) \times (Y\text{-axis number}) > 99$, the limit of consecutive work was passed.	Make sure that consecutive work should be set as $(X\text{-axis number}) \times (Y\text{-axis number}) < 99$.

7.1.6 Floppy Diskette and Communications

No.	Error Name	Error Description	Correction
600	No diskette.	There is no diskette inside the FDD.	Insert a diskette into the FDD.
601	No sectors on the diskette	A floppy diskette is not formatted or the format is different.	Format a diskette or replace it with other diskette.
602	No design data in the diskette	There is no embroidery design saved in a floppy diskette.	Replace the diskette.
603	Remove the write protect tap.	When copying embroidery designs, the diskette write protect tap is enabled.	Disable the write protect tap.
604	Diskette damaged	A floppy diskette is damaged.	Format a diskette or replace it.
605	Insufficient memory capacity	There is unoccupied space for copying in a floppy diskette.	Replace the diskette with a new one.
606	Diskette removed from FDD	A floppy diskette is removed in the middle of FDD operation.	Insert the diskette and start are work again.
607	Bad sector error during floppy reading	The floppy diskette' s sector is bad.	Format the diskette or replace it.
608	Bad sector error during floppy writing	The floppy diskette' s sector is bad.	Format the diskette or replace it.
609	Diskette error whose cause is unknown	Errors are developed whose cause is unknown while the floppy diskette is in operation.	Format the diskette or replace it with another one.
610	Diskette error	Errors are developed whose cause is unknown, while the floppy diskette is in operation.	Format the diskette or replace it with another one.
611	ZSK design error		
612	BARUDAN design error		
613	Bad sector error		
614	Operating program install error	When the operating program is installed, the operating program file name does not match or does not exist.	
630	Error found in the read data	The data read through the tape reader develops errors.	Enter data through the tape reader again.
640	Network device error	The network devices are not connected.	Check the status of the network devices.

7.1.7 Memory

No.	Error Name	Error Description	Correction
700	No embroidery data found in the memory	The embroidery data does not exist in the memory.	Use a floppy diskette or a USB to save embroidery data.
701	Insufficient memory capacity	The data desired to copy in the memory failed to be copied due to the lack of memory capacity.	Delete unnecessary data.
702	100 memory rooms are full.	The 100 memory rooms are all saved with designs.	Delete unnecessary data.
703	Error in design memory system	Errors have occurred during copying or deleting data between memory devices.	Press Reset or turn off and on the main switch.
704	Bad memory battery	The battery is exhausted when the power is off. The status of saving the number of stitches and the x, y position information is unstable.	Call the A/S center at the nearest to your place and replace the battery. If this error frequently occurs, need to replace the CPU board.
801	Sequin design error	There is an error in the sequin design.	Amend the design.
901	MC1 communications error	The CAN communications do not regularly occur.	Check the cable and turn off and on the power.
902	MC2 communications error	When the CAN communications do not regularly occur.	Check the cable and turn off and on the power.


7.1.8 USB Memory

■ FAQ about USB memory recognition problem

Q. USB device is not recognized.

1. Did you insert the USB into USB port on the side of the OP Box properly?

- ① The USB can be inserted in reverse when connecting it by force. Moreover, the quality of the connecting pin contact condition on the input port is depreciated due to the frequent insert into the USB port. Check out the USB LED light after inserting.

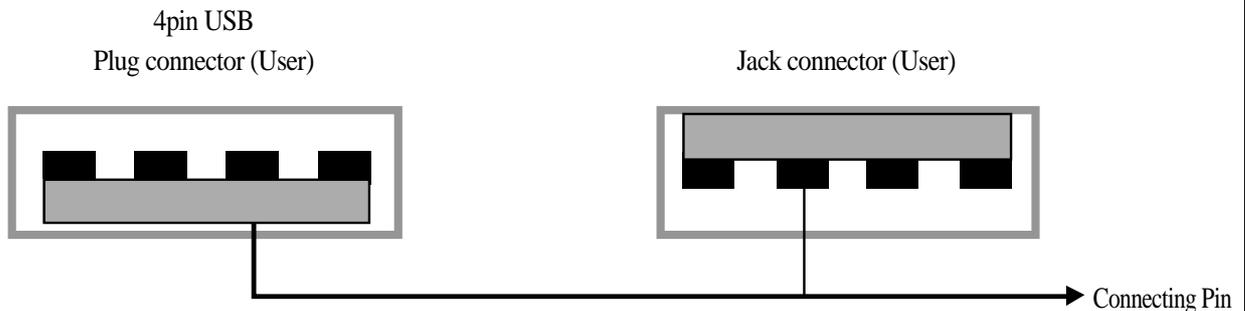

2. Do you use an USB extension cable or hub?

- ① An USB extension cable or an USB hub can reduced the standard voltage(DC +5V) of the USB port. In this case, the USB cannot work normally.

3. Please run a virus-check.

- ① Some viruses interrupt the recognition of the exterior device. Use various vaccination programs to treat viruses not use one program.

4. Recommended the use of our company's suggested USB makers

- ① There are many USB manufacturers. The USB is fitted with the controller that is different depending on the manufacturers. Therefore, recognition problem can occur due to the quality differences depending on the manufacturers. You can solve this problem by using the common manufacturer' s USB. We recommend you use the SAMSUNG, LG, SANDISK, TRANSAND' s USB. However, an error rate of recommended makers does not guarantee 100% flawless USB.


[CAUTION]

Please call our nearest office or SWF CS center when continuous problems with USB occur.

7.2.0 Machine Setting

7.2.1 Control Box Front

[Fig. 7.2.1-1] shows the front side of the Control Box.

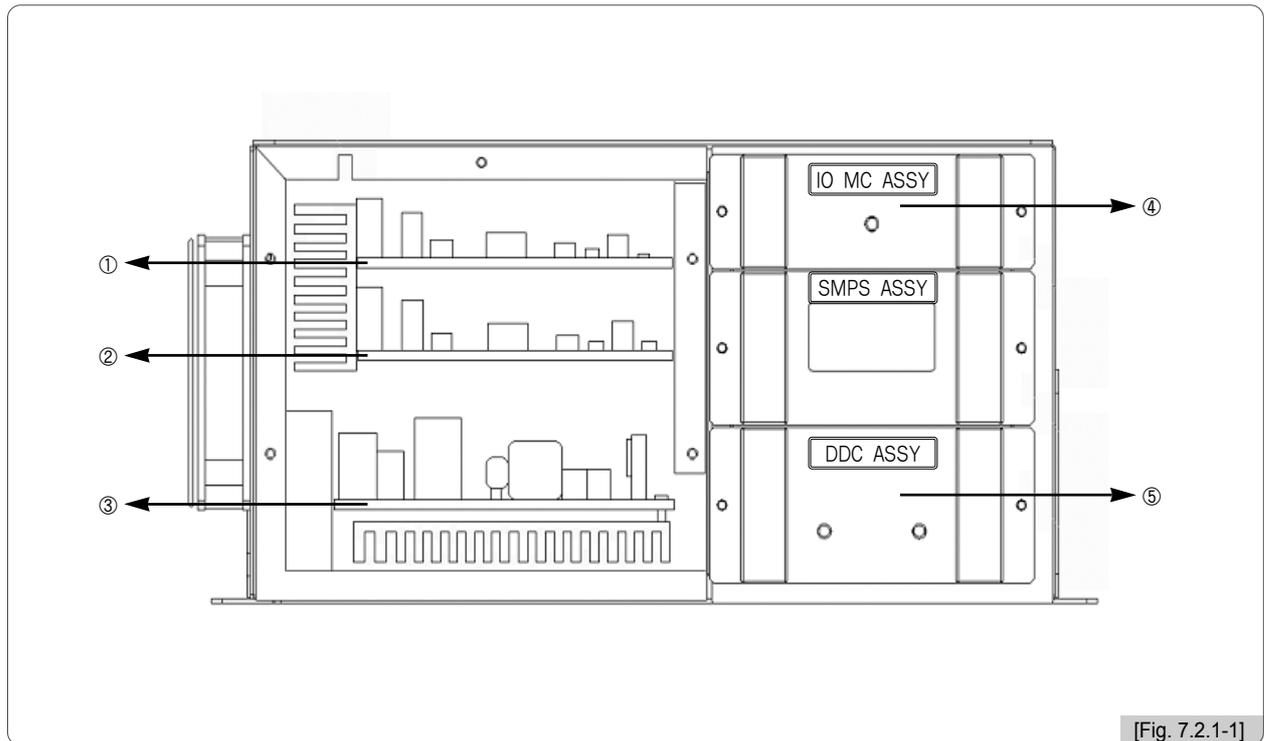


[Fig. 7.2.1-1]

- ① X Driver
- ② Y Driver
- ③ Main Driver
- ④ IO Ass'y Rack
- ⑤ DDC Ass'y Rack

7.2.2 X/Y Driver and Main Driver Switches Setting

(1) X/Y Driver Rotary Switch (RSW3) Setting

① Position of X/Y Driver Board Switch

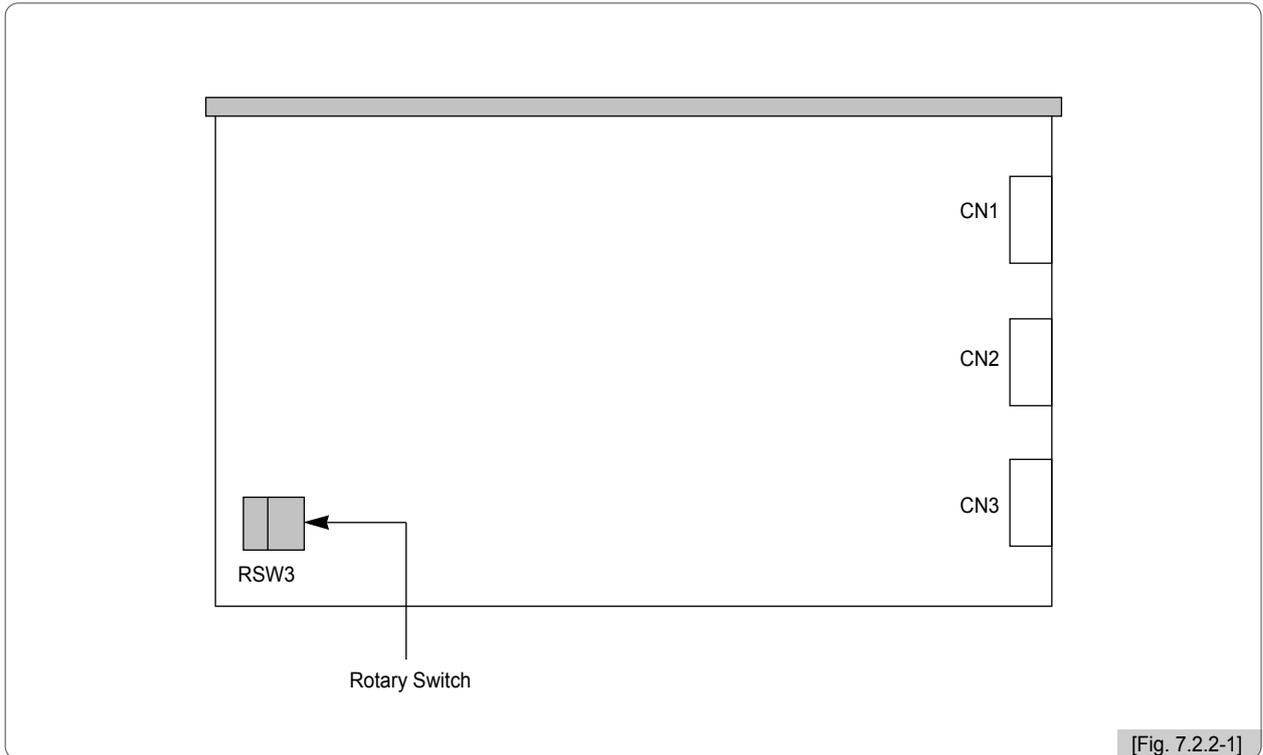


② X/Y Driver Rotary Switch Setting

Machine Type	Rotary Switch		Current
	X	Y	
2-Head	8	F	2A
4-Head	4	C	
6-Head	8	F	2.5A

Take caution to set properly, since the setting values are different by machine type. For other machine types which are not covered, please contact the distributor's shop for inquiry.


(2) Main Driver's Dip Switch (SW1) Setting

① Main driver board's switch position

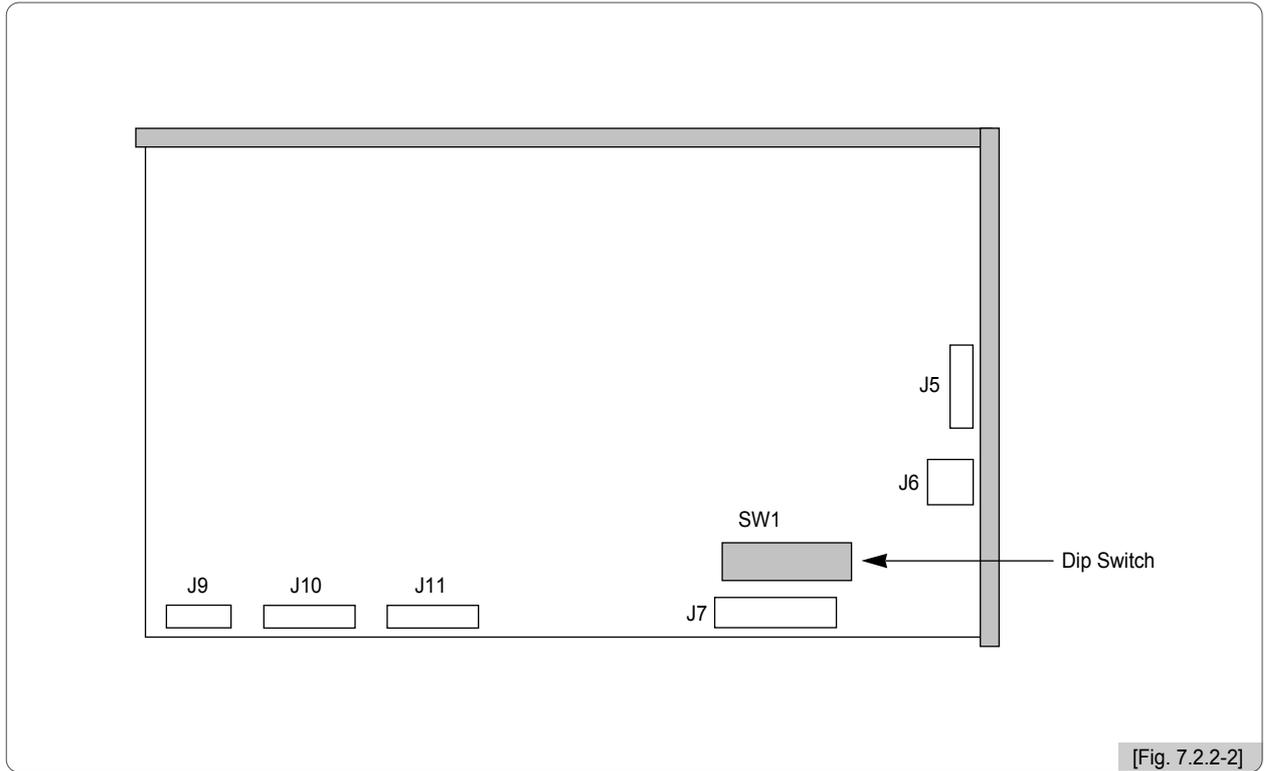

[Fig. 7.2.2-2]


② Dip switch setting

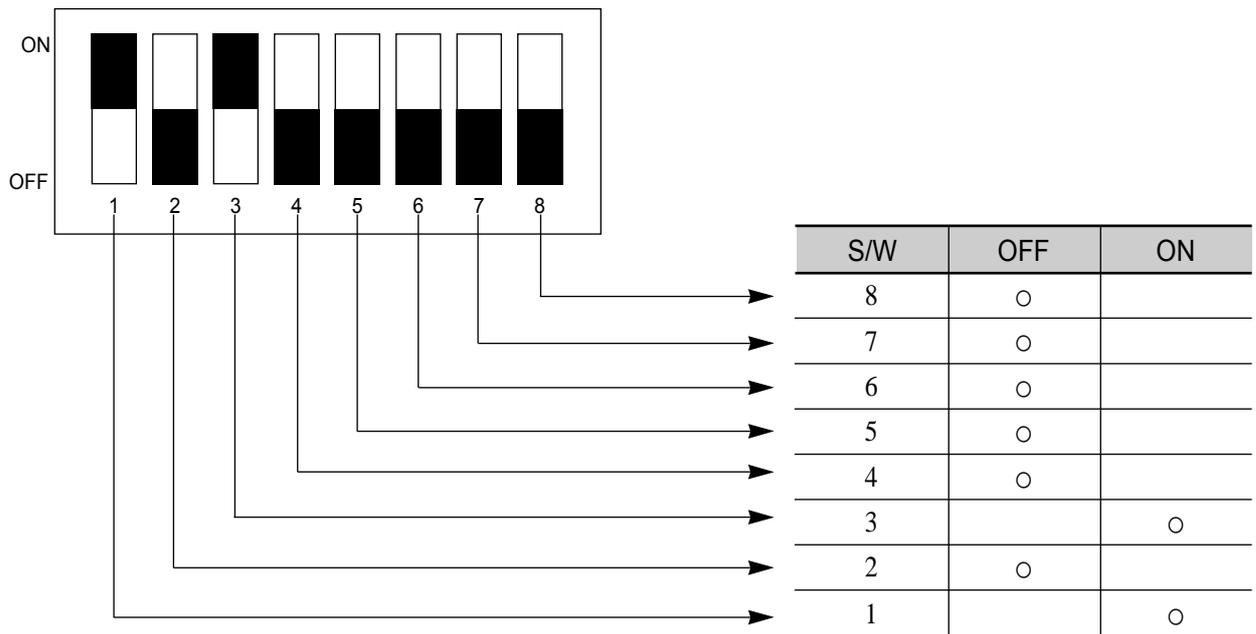

7.2.3 Fuse Install and Replacement

After inserting the power plug into the outlet, turn on the power switch. If the power is not supplied, take actions following the directions below:

Check the lamp board position from the control box as in <Fig. 7.2.1-1> and replace the fuse on the board.

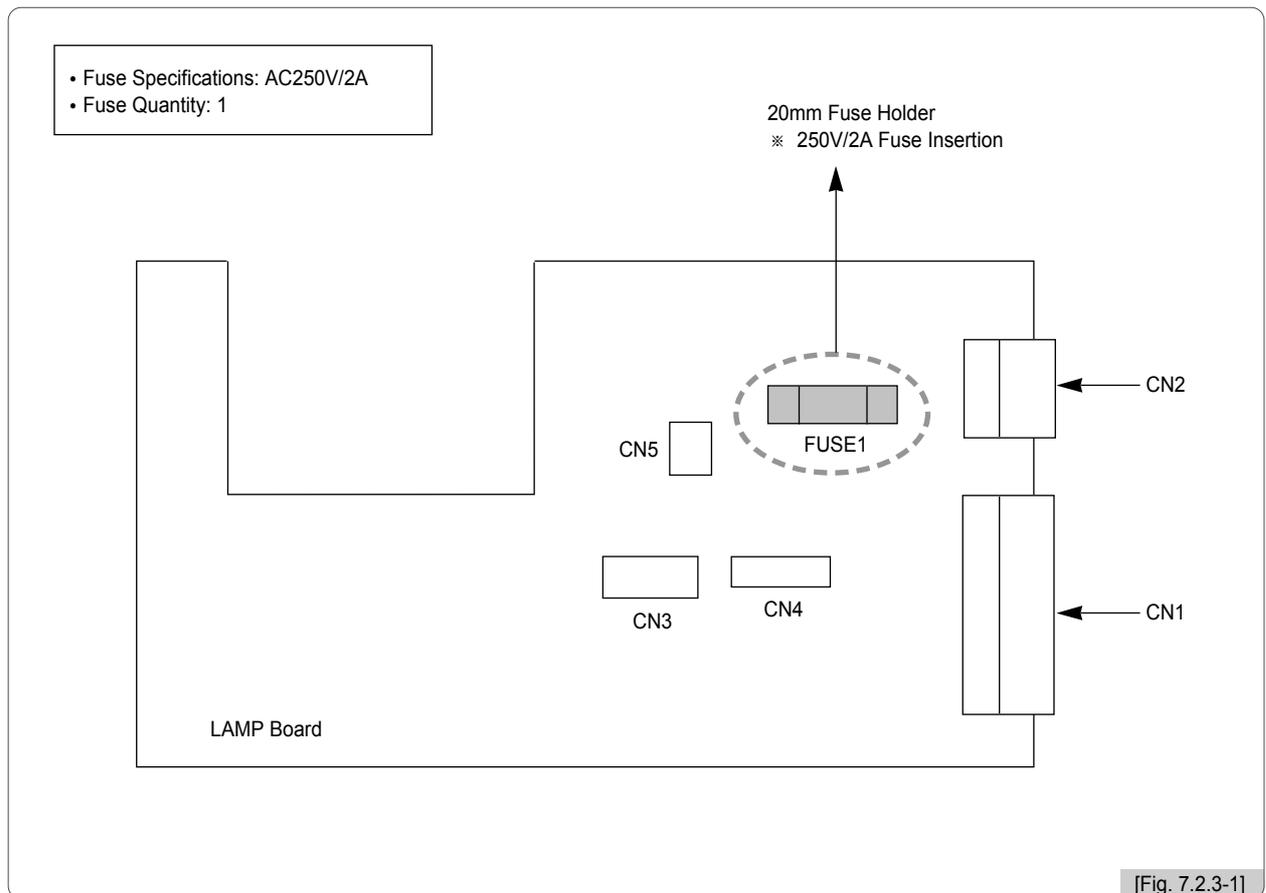

Even after turning off the power switch, there is still the risk of having an electric shock. Before replacing the main board or conducting the A/S activities, make sure to pull off the power plug.

